

Initialization of Rear Right Door Window Motor for 2011 Porsche

Tested Model:

- Porsche Cayenne, 2011, VIN=WPIAC2923CLA****, see Picture 1.




Picture 1

Function Explanation:

- To remove or replace the rear right door window motor on 2011 Porsche, it is required to use X-431 decoder to perform the window motor initialization.


Operation Guideline:

1. Select Porsche Version V21.91 or above.
2. Select fast test, see Picture 2.

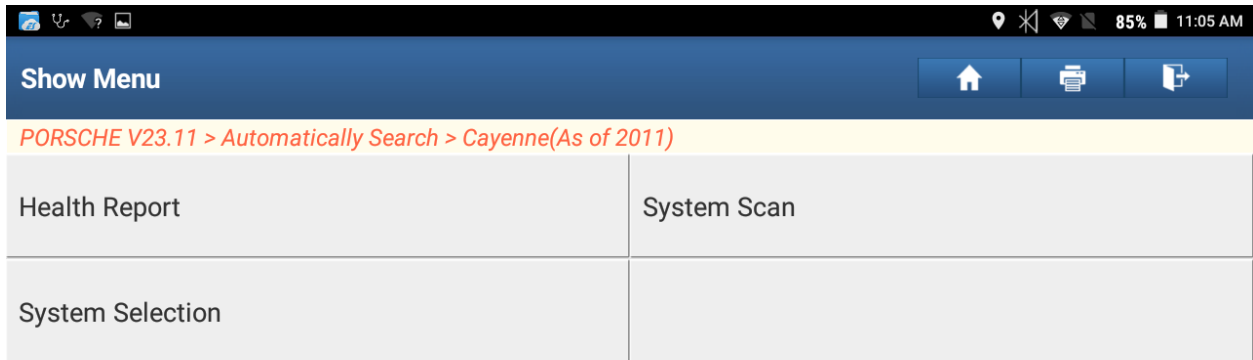


Picture 2

3. Select rear right door, see Picture 3.

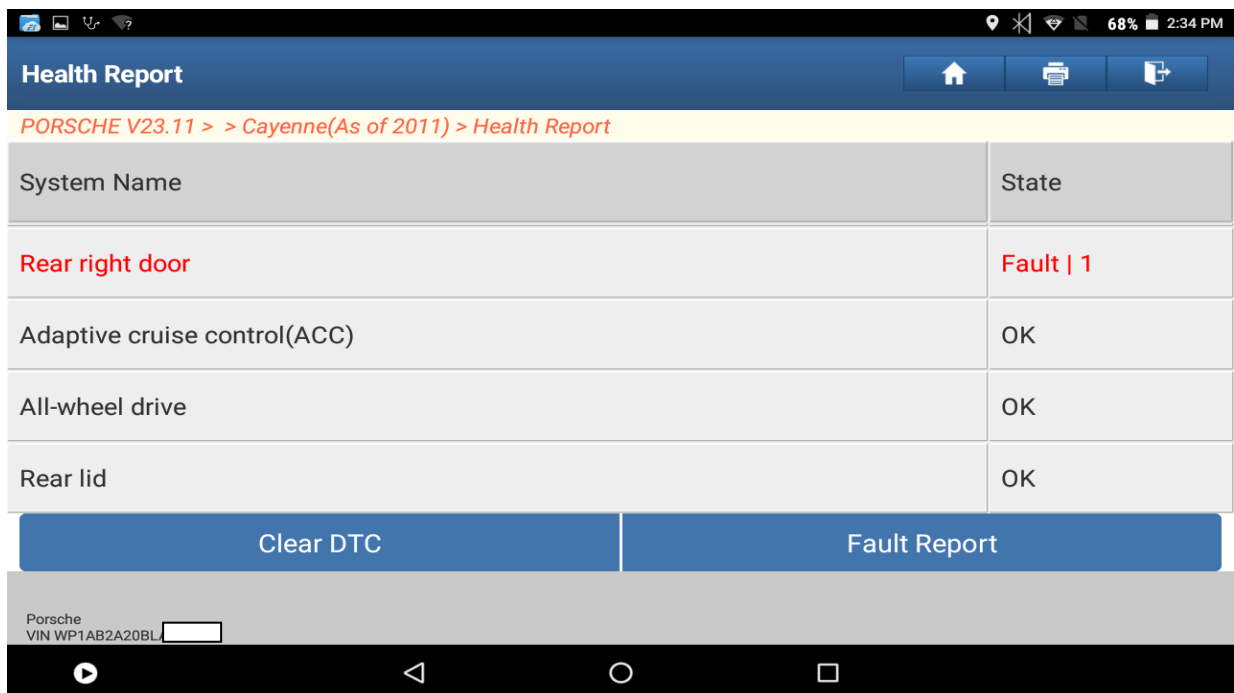


Picture 3

4. Select special function, see Picture 4.

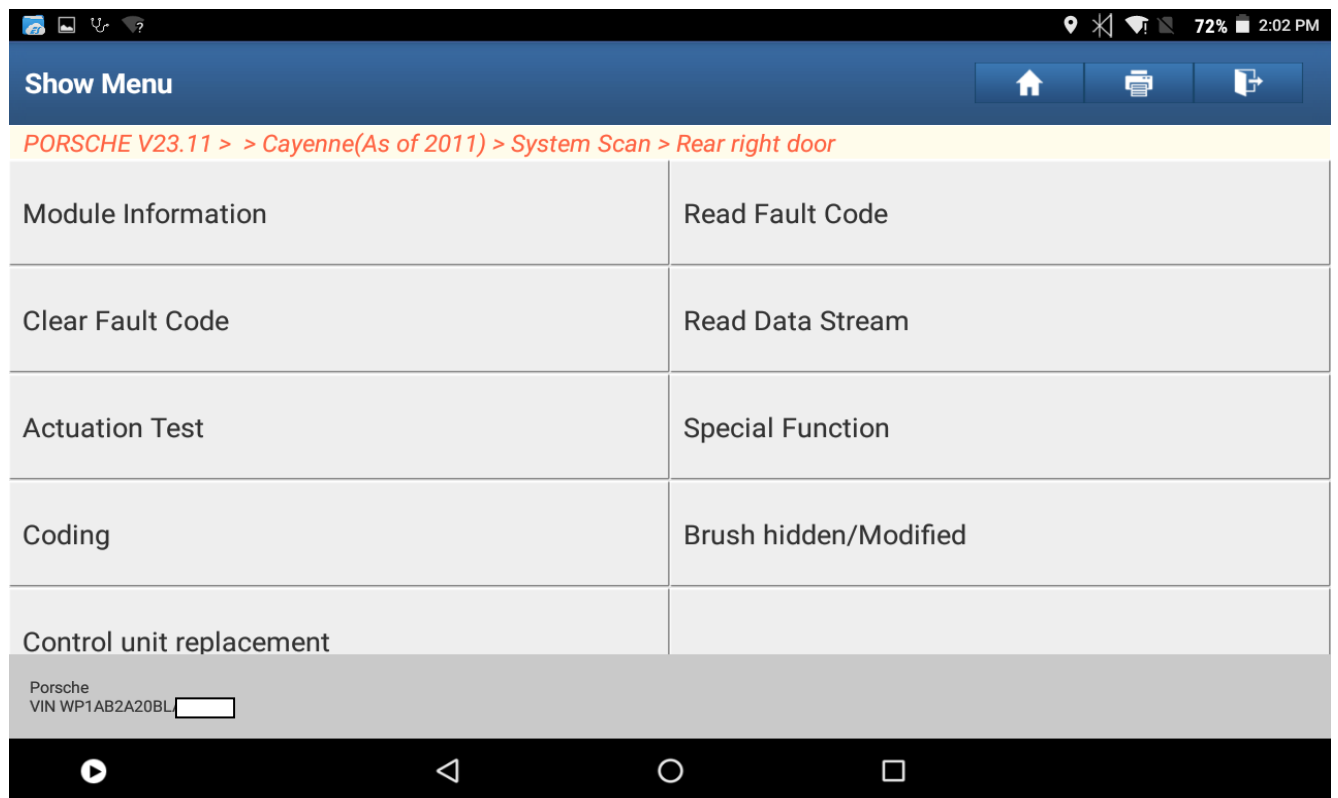


Picture 4

5. Click power window standardization, see Picture 5.

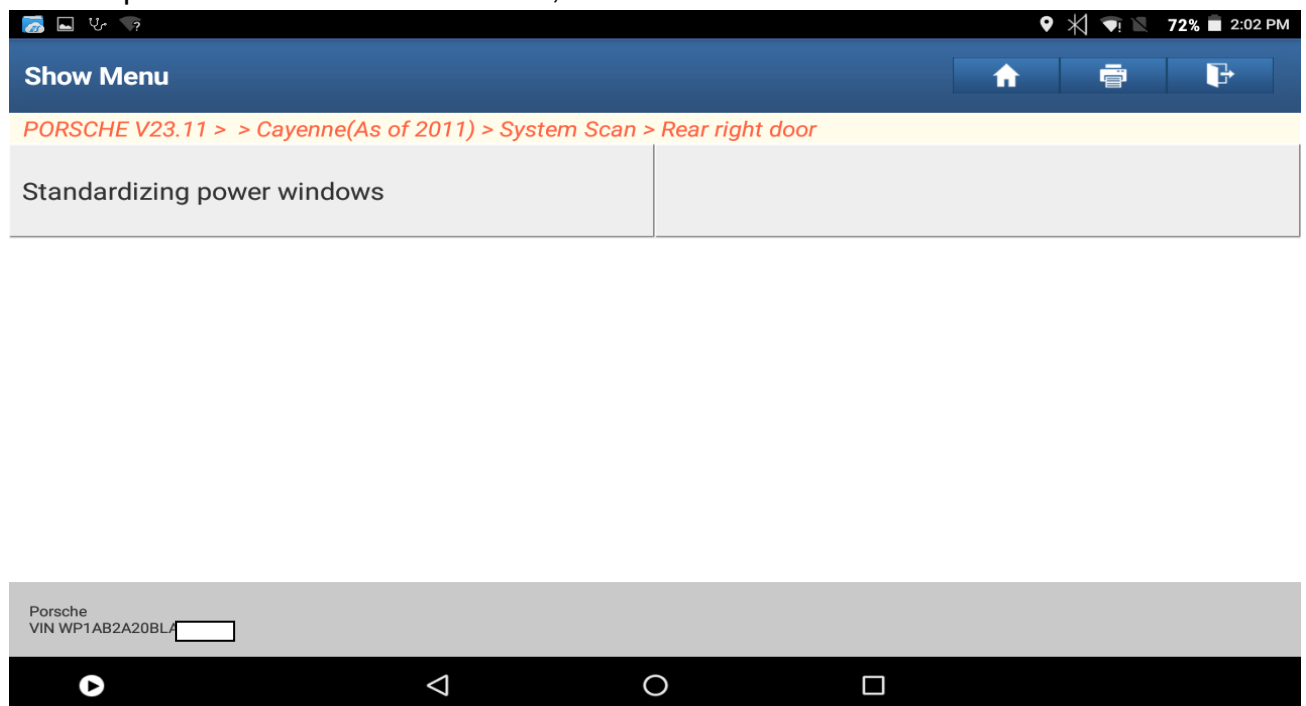


Picture 5

6. It prompts the conditions for standardizing power window: Terminal 15 on, vehicle speed=0km/h, engine not running, battery voltage above 9V, and power window system working normal. After confirmation, click OK, see Picture 6.

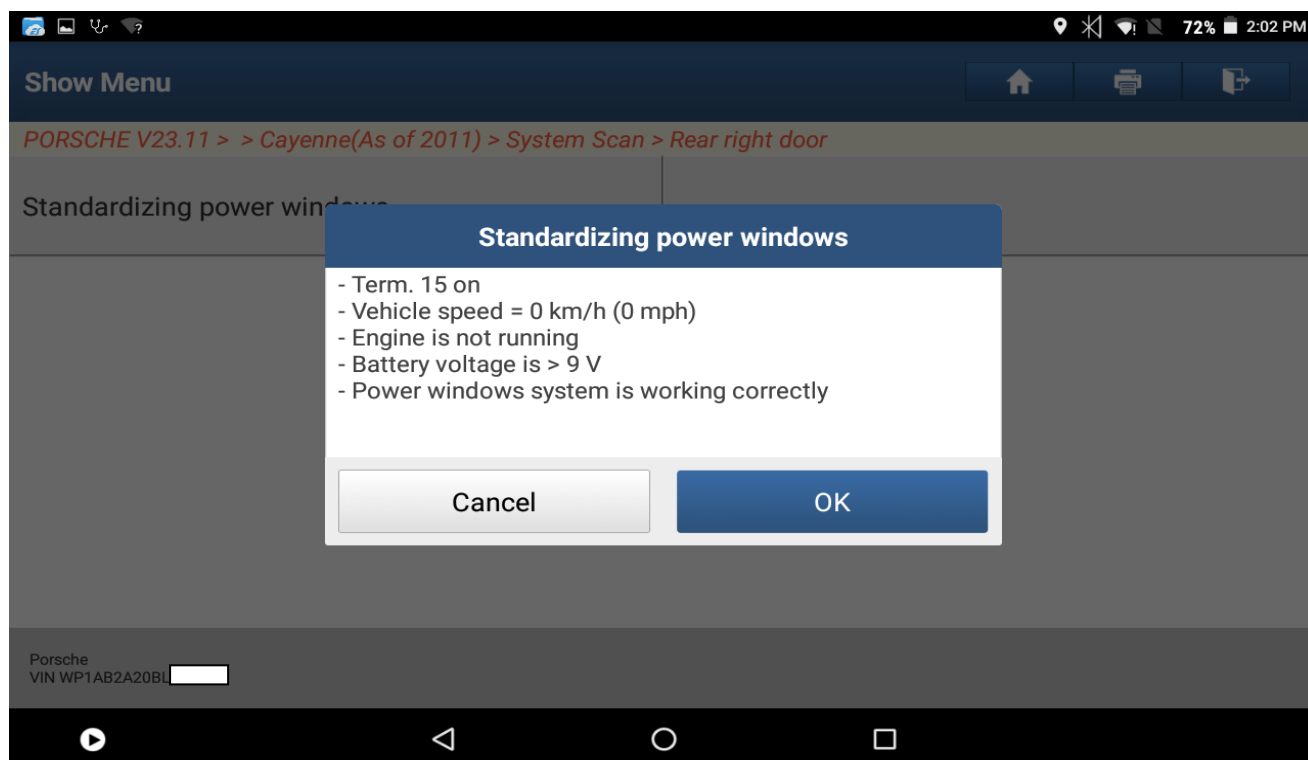


Picture 6

7. It prompts the safety tips for power window standardization. After closing the door and confirming the safety, click OK, see Picture 7.

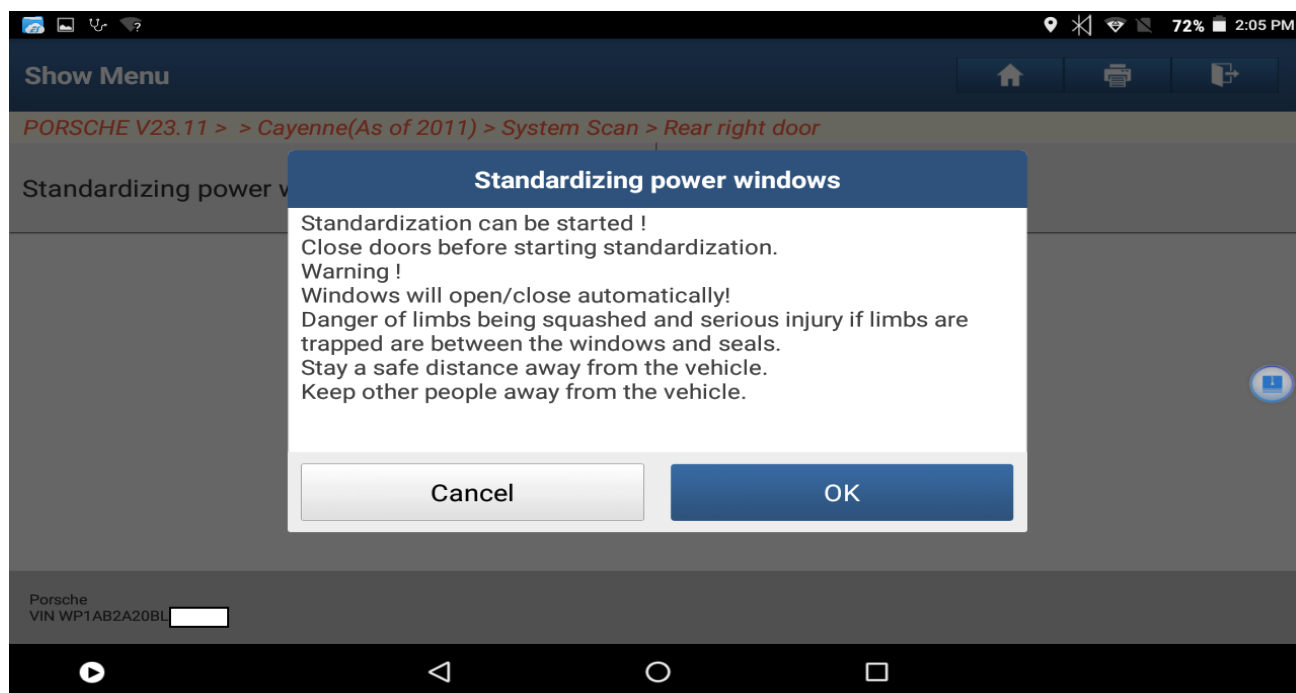


Picture 7

8. It shows standardization in process. Please wait. See Picture 8.

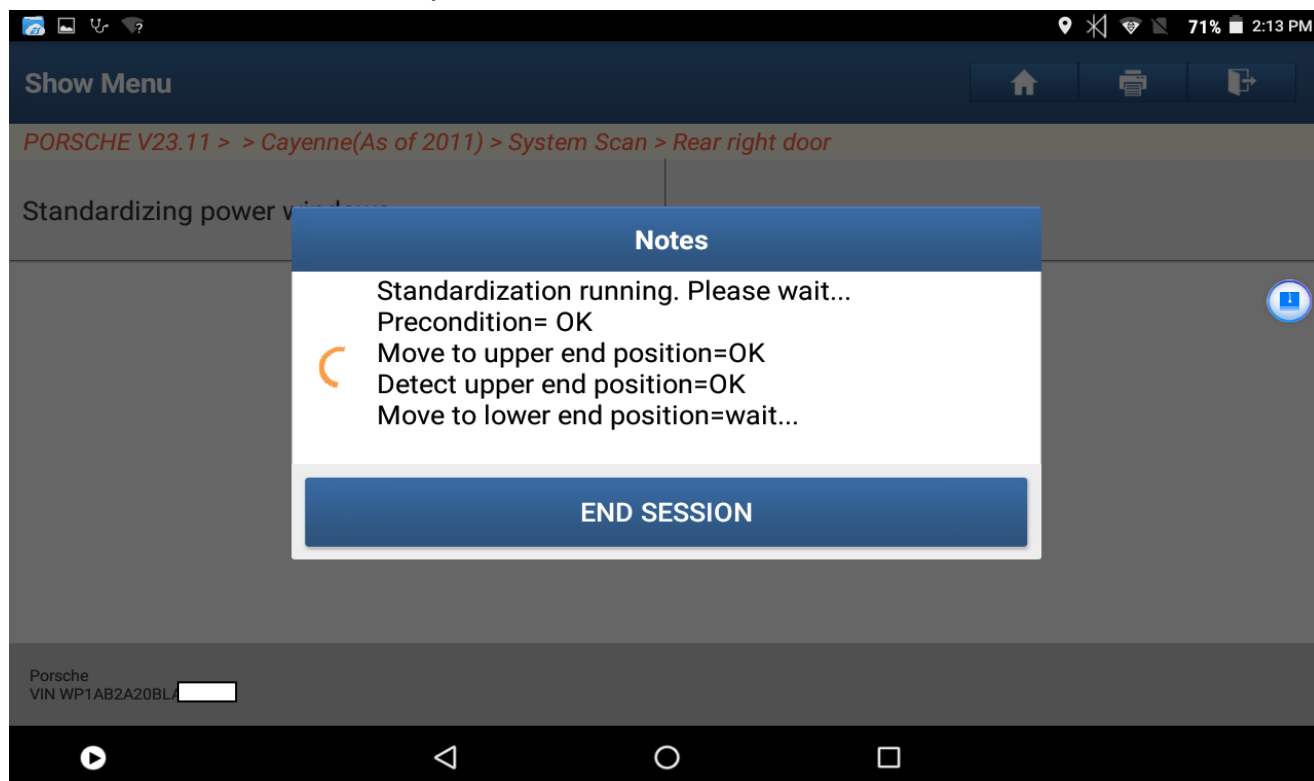

Picture 8

9. In about 1 minute, it shows the power window standardization completed and no DTC is returned, see Picture 9. Troubles are removed and the function is now normal.

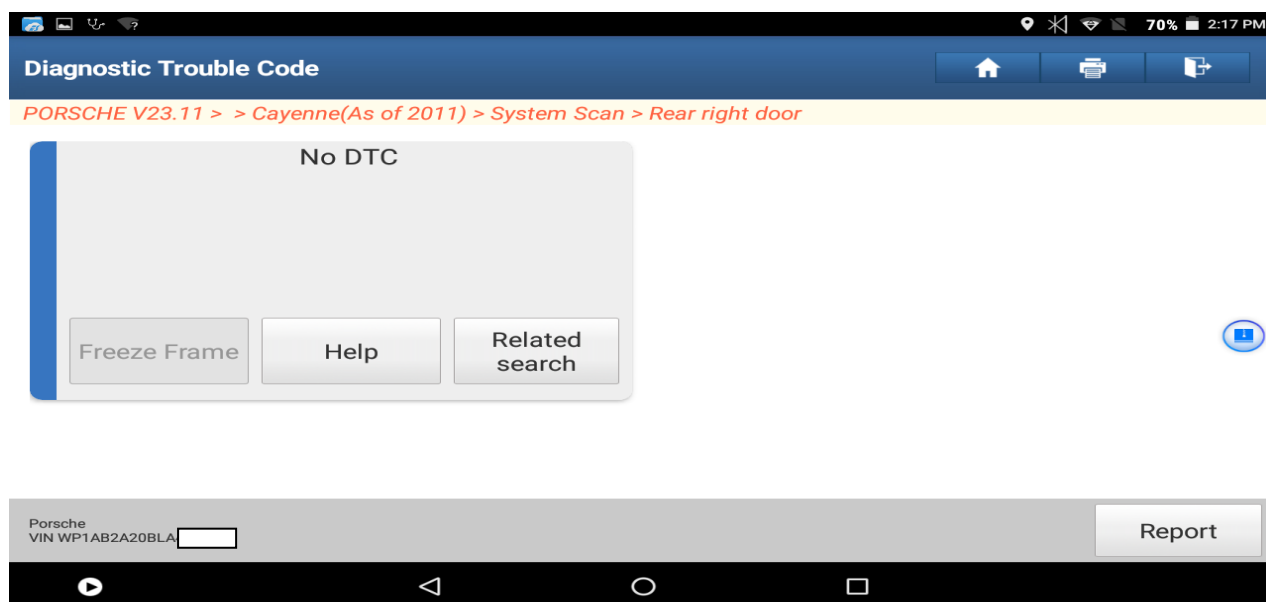

Picture 9

Declaration:

The copyright of this document belongs to Launch Technology Co., Ltd. Any company or individual shall not quote or reprint without permission.