GM GMC Sierra Throttle Matching Method

Supported equipment: Launch's full range of comprehensive diagnostic

equipment


Current equipment: PAD V

Function description: After replacing the ECU or throttle valve body, it is

necessary to perform the throttle matching function.


Tested model: 2020 GMC Sierra VIN: 3GTU2NEJ1JG2*****

1. On a PAD V, choose [Local Diagnose].

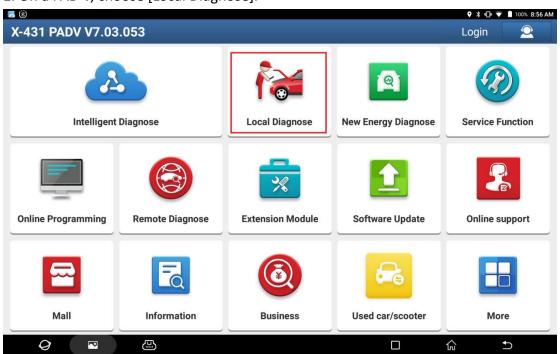

2. Then, choose [GM] to test.





INTRODUCTION

This diagnostic software can test the ECUs of GM Models,including:


Engine Control Module, Transmission Control Module, Antilock Braking System, Supplemental Inflatable Restraint, Body Control Module, Instrument Panel Cluster, Heating and Air Conditioning, Tire Pressure Monitor, Electronic Suspension Control, Radio, Driver Door Module, Driver Position Module, Passenger Door Module, Remote Control Door Lock Receiver, Vehicle Comm. Interface Module, Immobilizer, Amplifier and so on.

Reading ECU information Reading DTCs Clearing DTCs Reading vehicle running data Vehicle component operation test


Special Functions:




3. Choose [Automatically Search] to identify car models automatically.

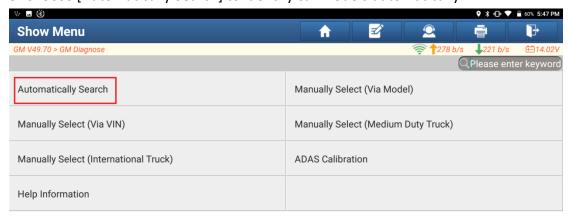



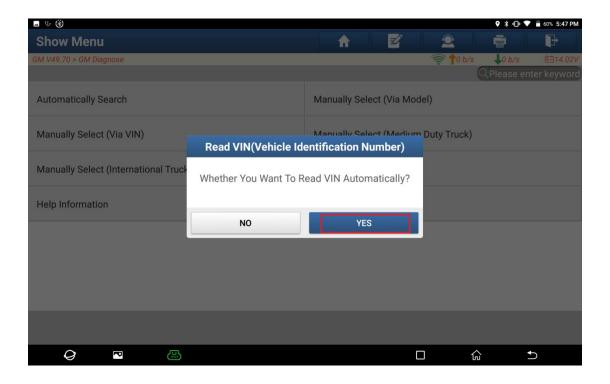


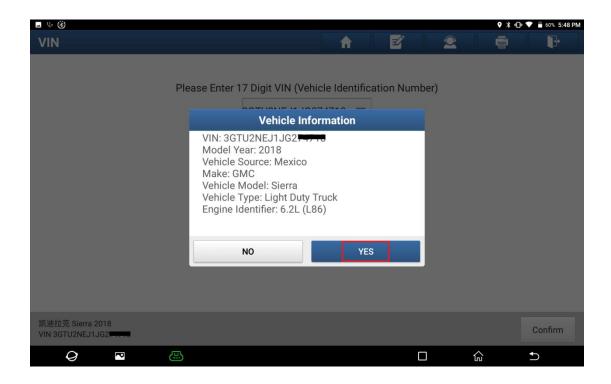


4. Click [Smart Detection] to scan the entire vehicle systems.





5. Click [ECM (Engine Control Module)] to access the system.

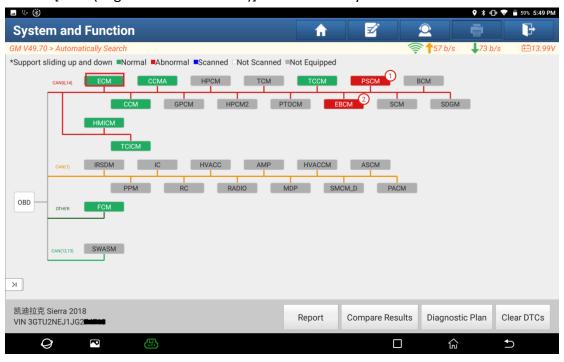

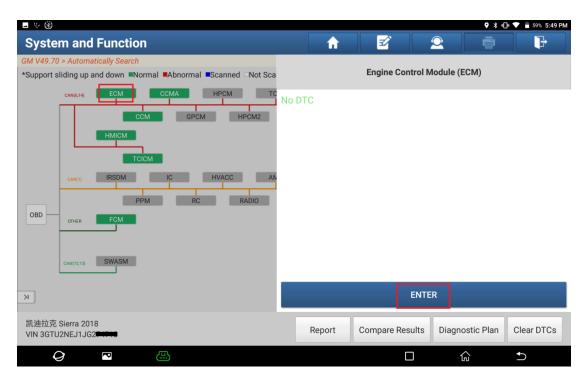

6. Click [Special Functions] and then click [Learn Functions].

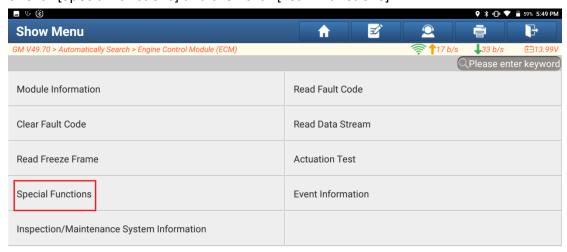

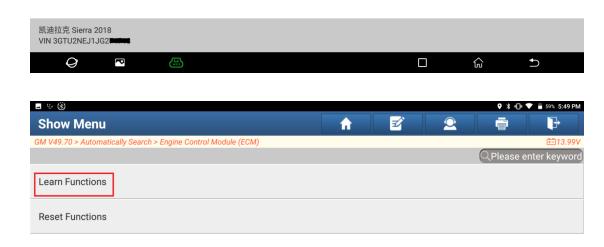




7. Click [Idle Learn].






8. Click [Learn] to perform the function.

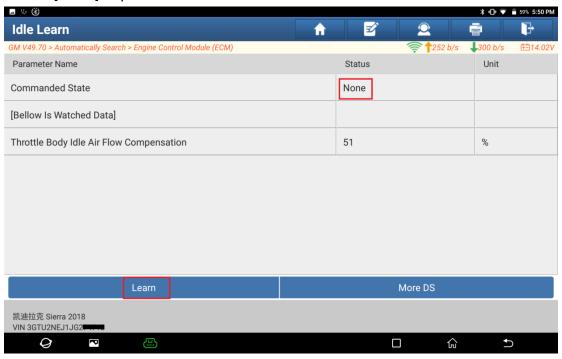

9. The status bar value changes from "None" to "Learn" and the function is completed. Exit the function.

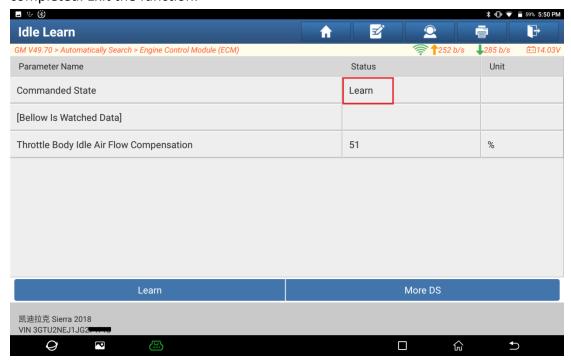

Statement:

The content of this document is copyrighted by Shenzhen Launch Tech Co., Ltd., and no individual or organization may quote or reprint it without consent.