

CHRYSLER Wrangler (Export) 2018 Diesel Particulate Filter (DPF)

Pressure Sensor Replacement


Supported equipment: Launch's full range of comprehensive diagnostic equipment



Current equipment: PAD 5

Function description: DPF (Diesel Particulate Filter) pressure sensor replacement performed in CHRYSLER Wrangler (Export)


Tested model: CHRYSLER/2018/Wrangler (Export),
VIN: 1C4HJXDGXJW1*****

1. On a PAD 5, choose [Local Diagnose] and then [CHRYSLER] to test.

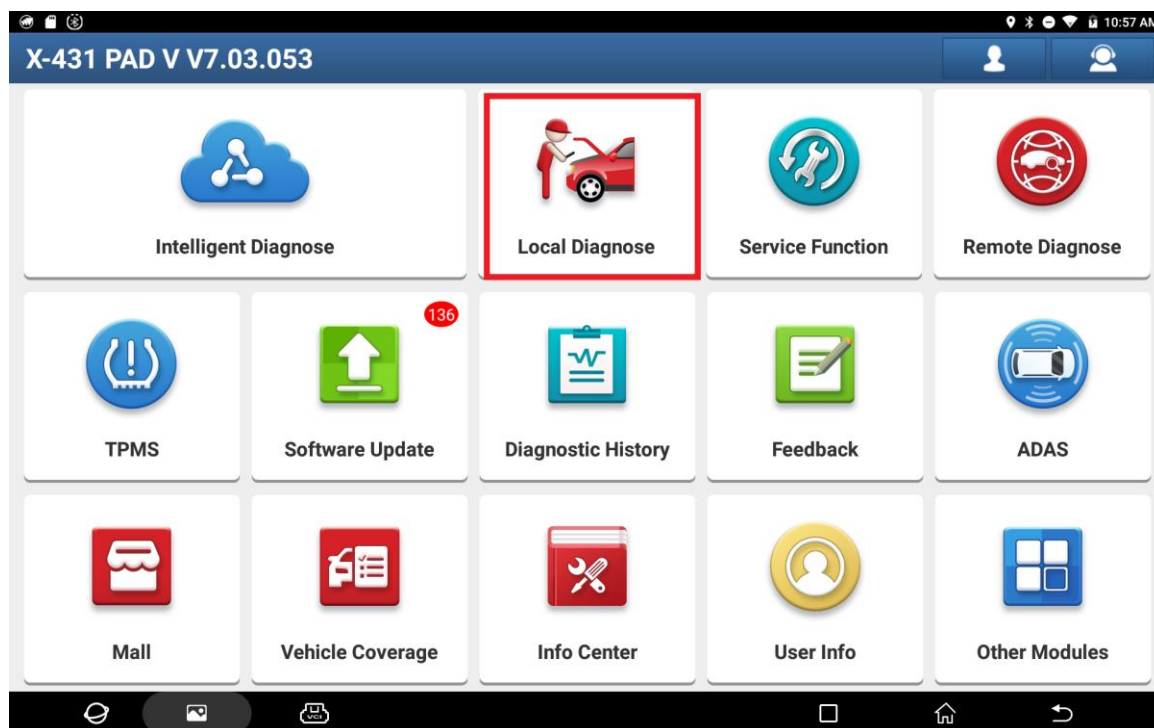


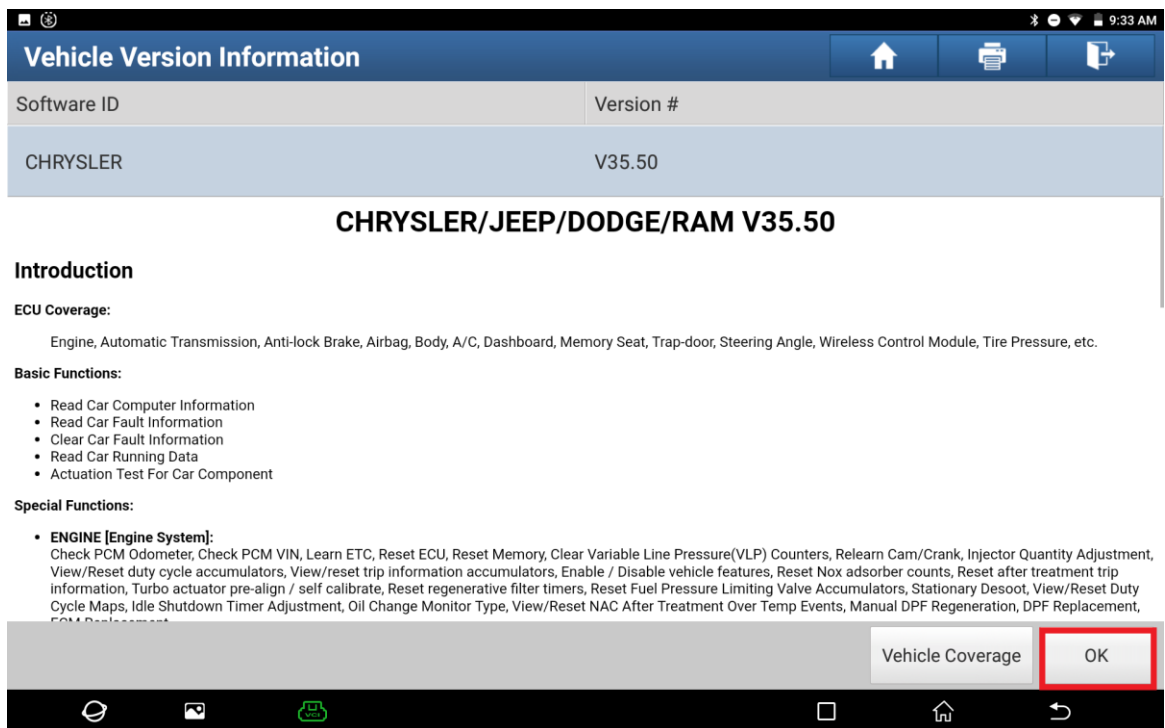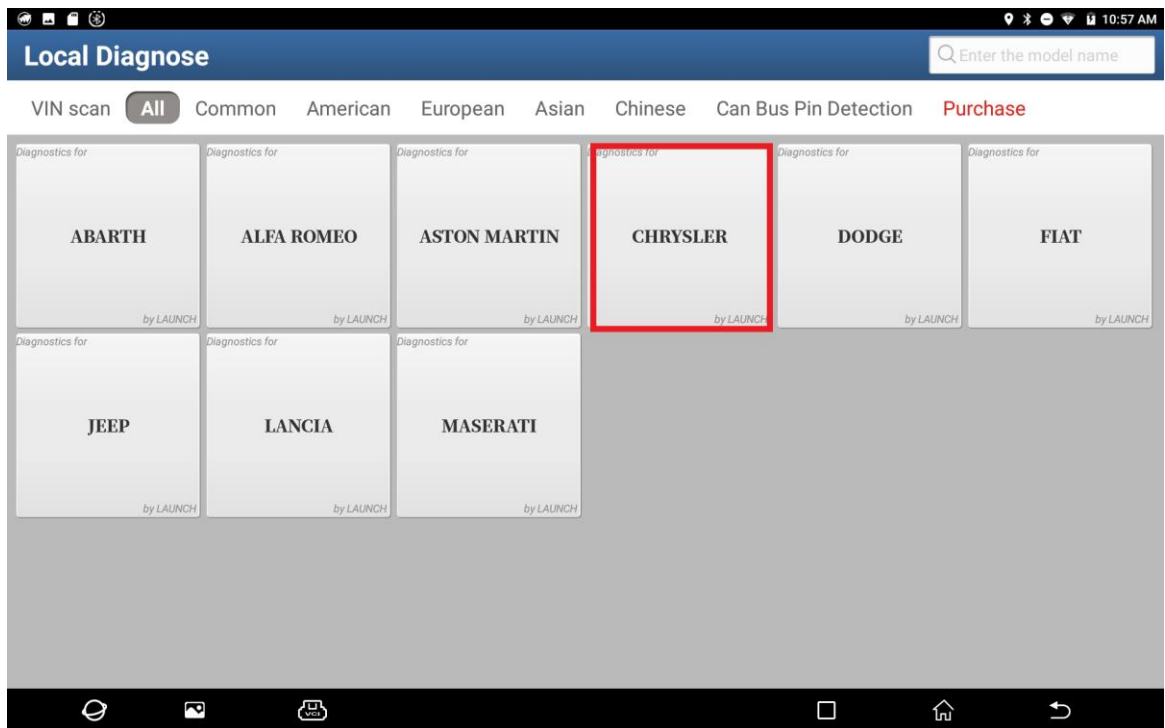


2. Choose [Automatically Search] to identify car models automatically.

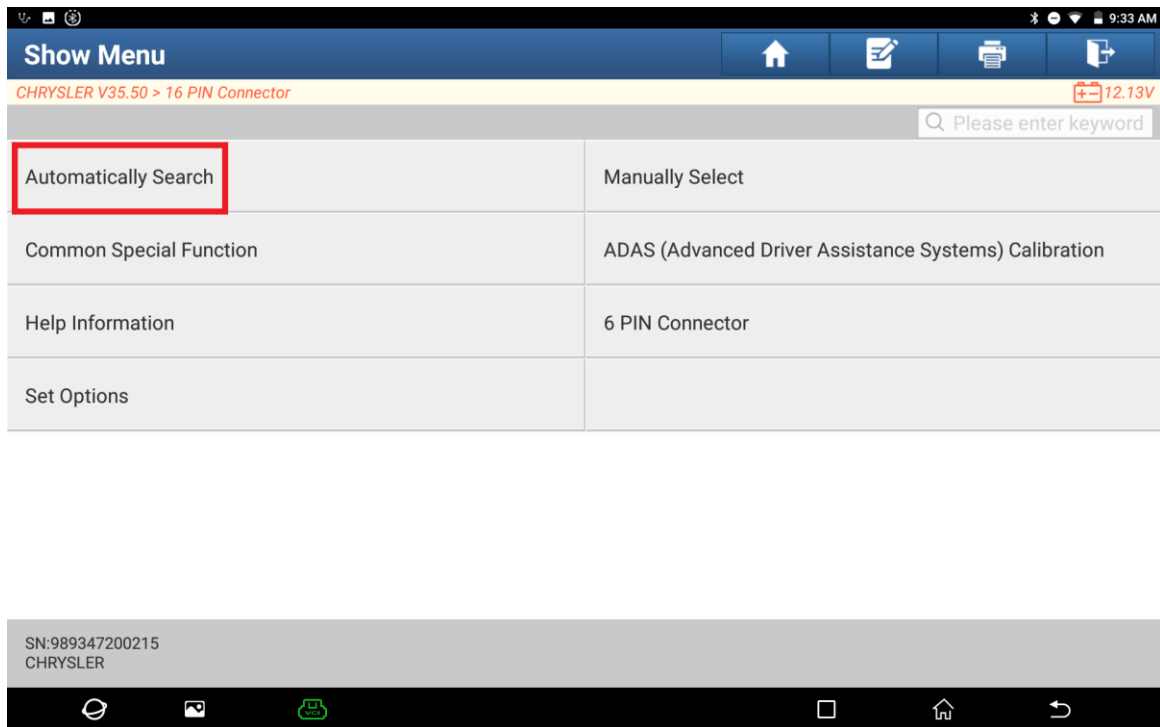



3. Click OK. It displays a prompt message indicating that the SGW needs to be unlocked.

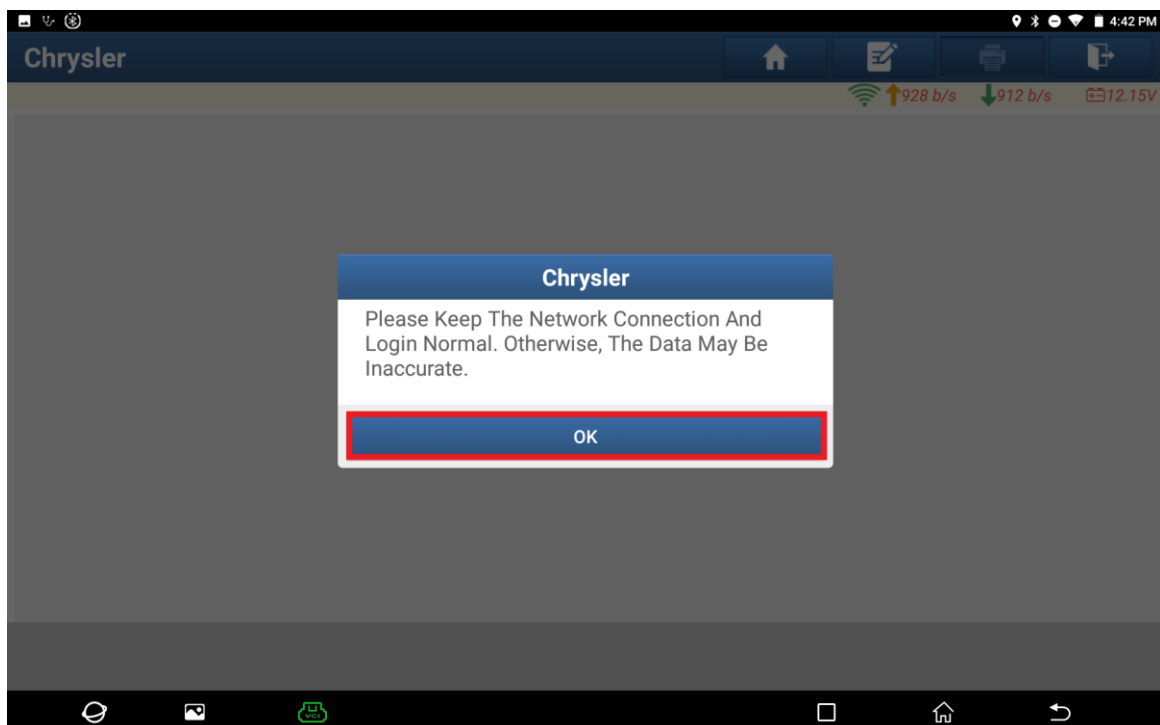

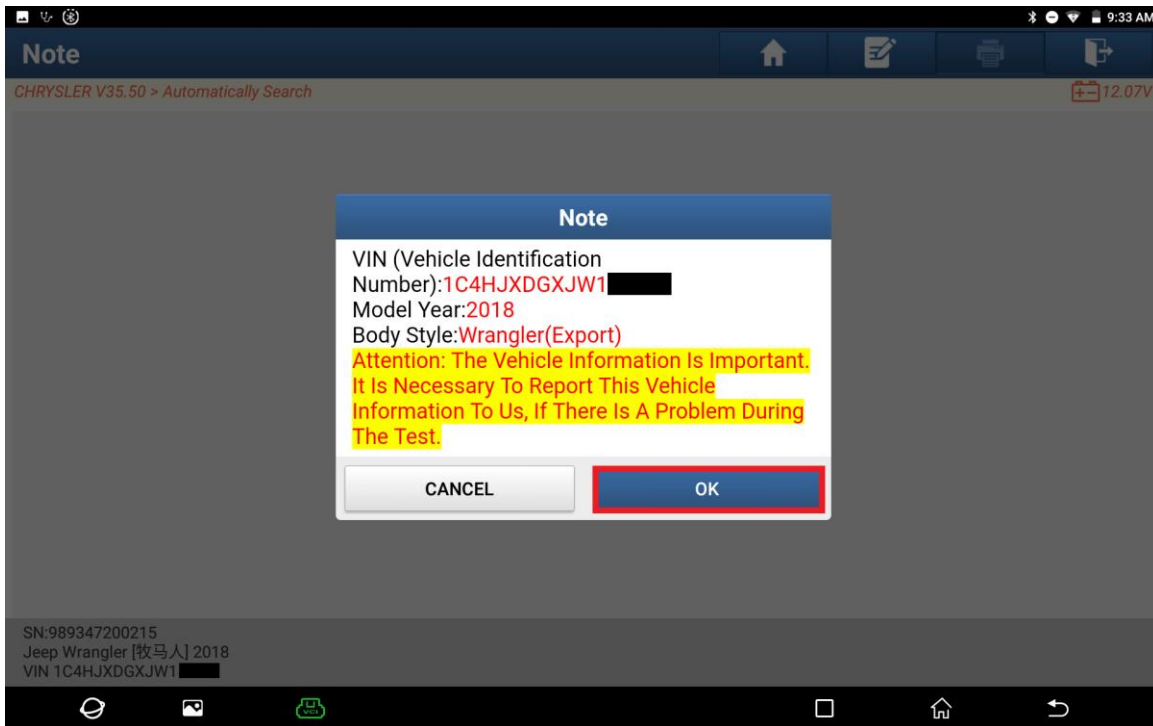



4. Click [Yes], choose [North America], and input the FCA account you purchased.

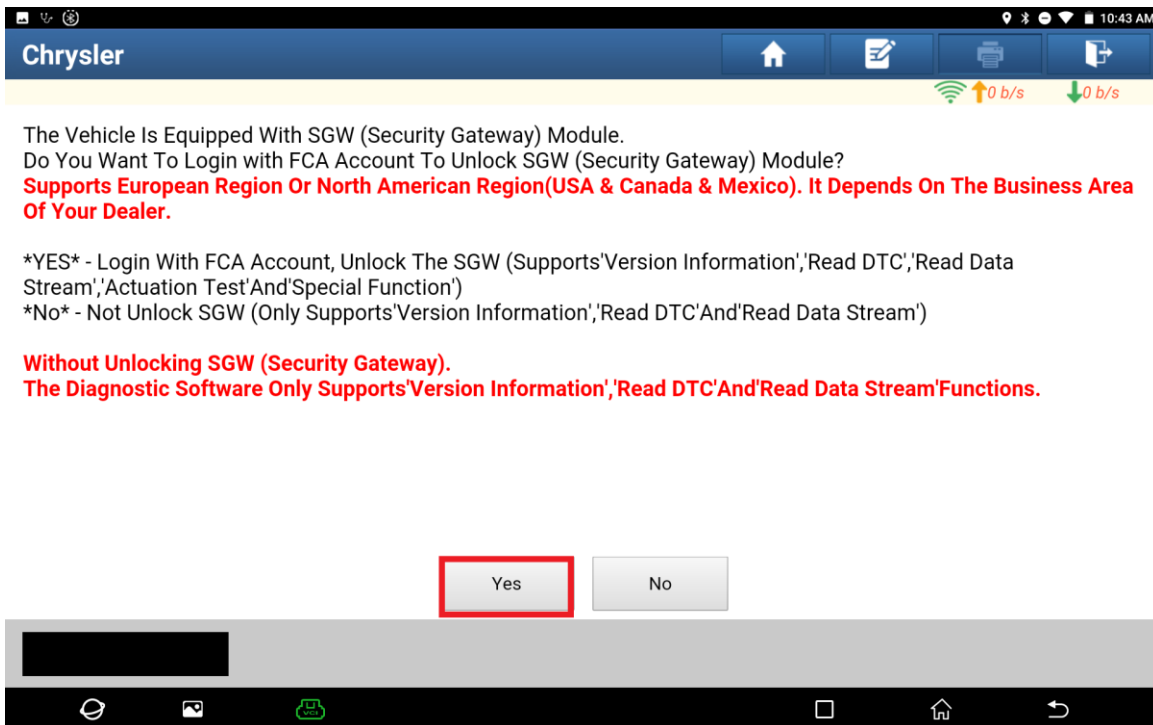

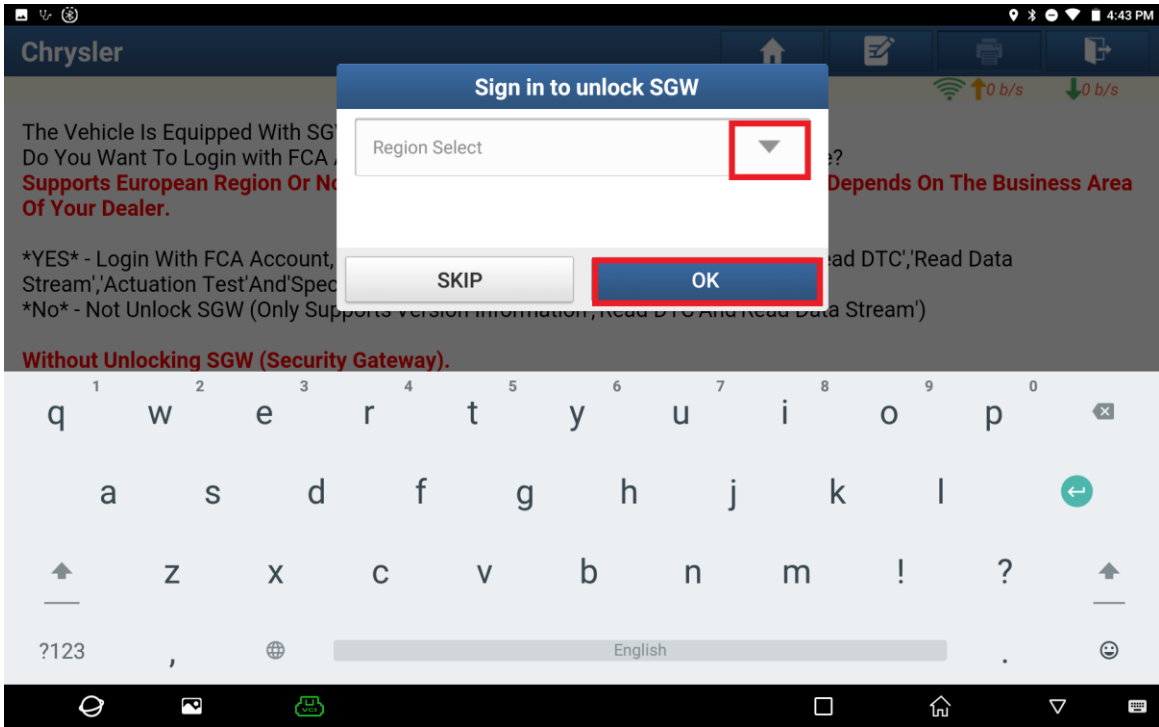


5. Click OK.


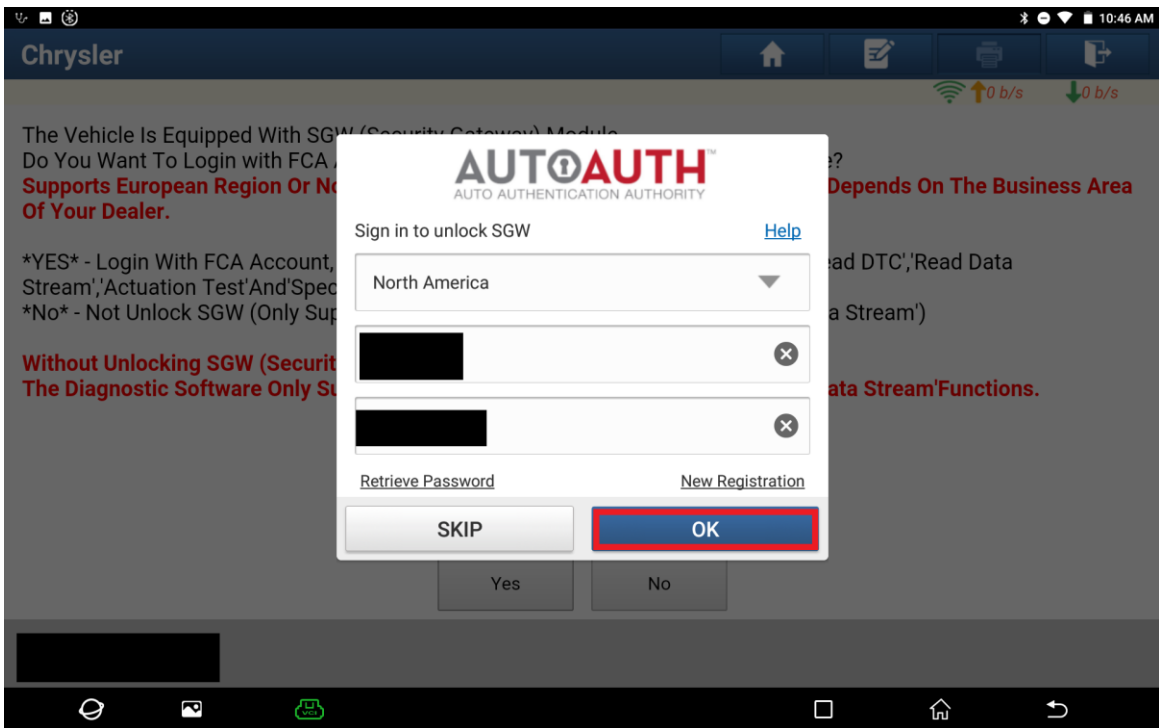


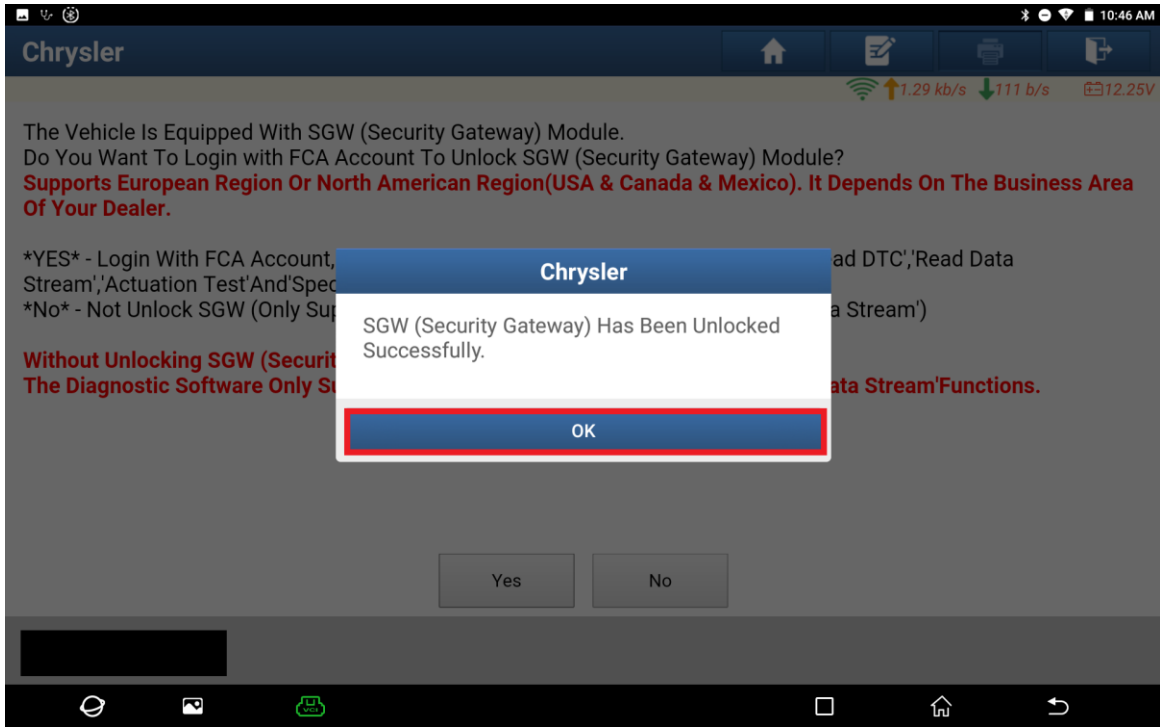


6. On the PAD 5, click [Smart Detection] to scan the entire vehicle systems.

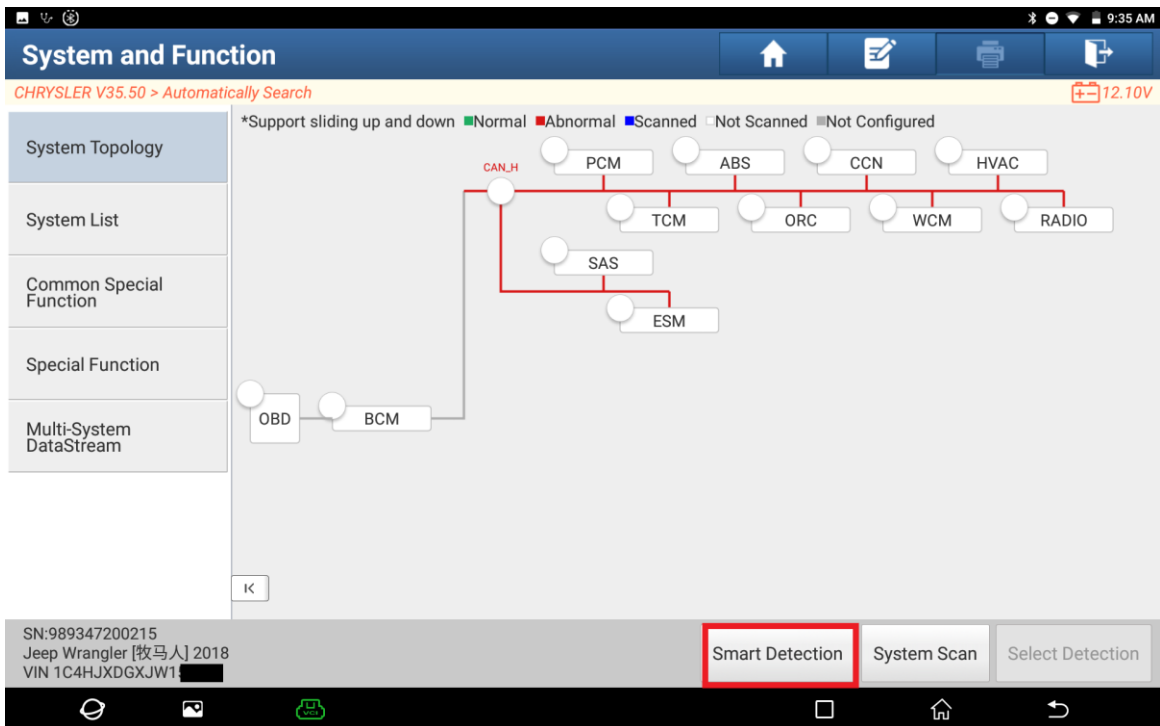


7. Click [PCM (Powertrain Control Module)] to access the system.

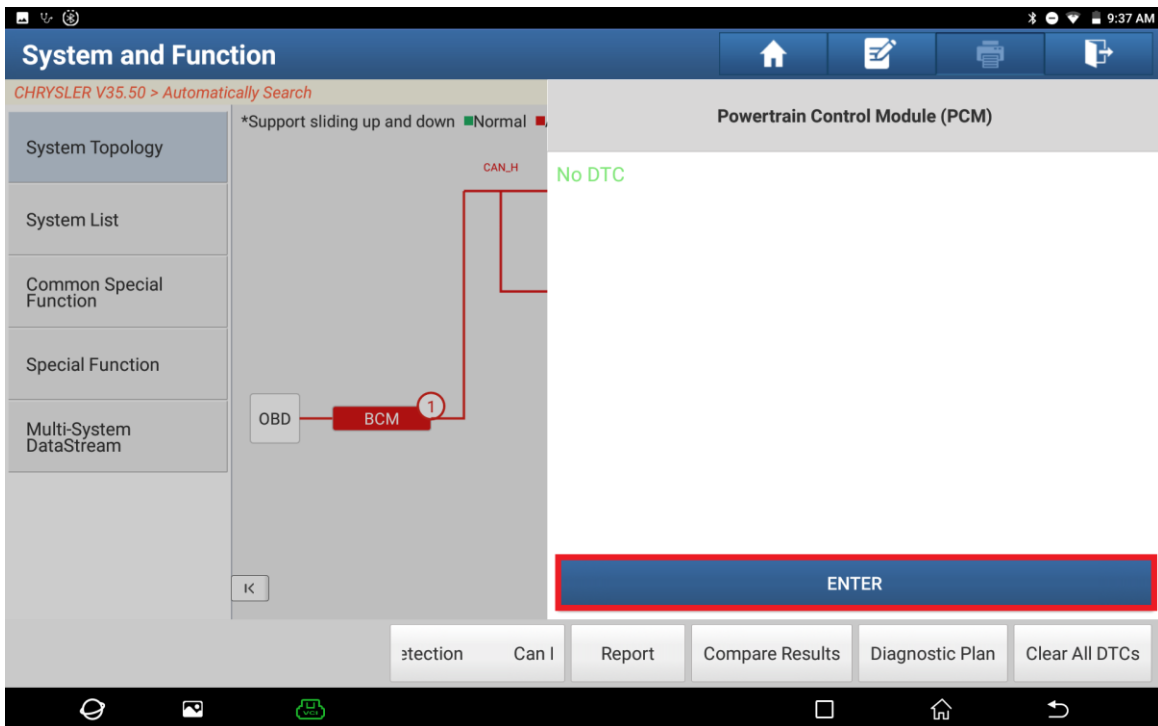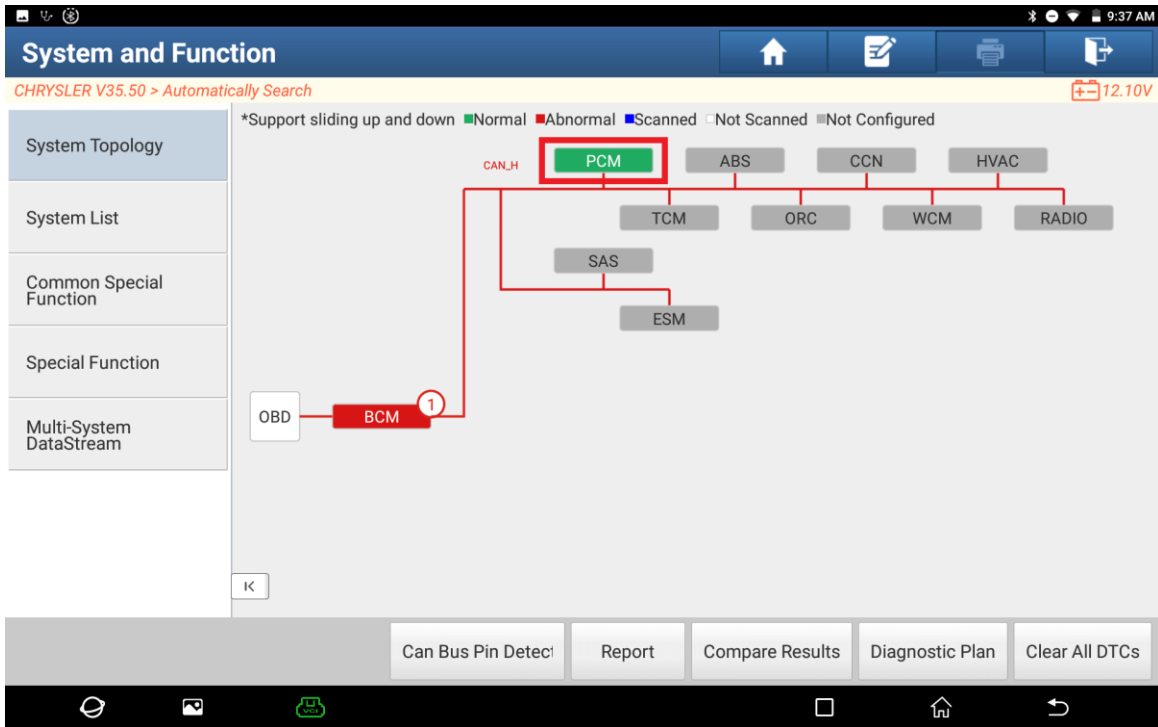


8. Click [Special Function].

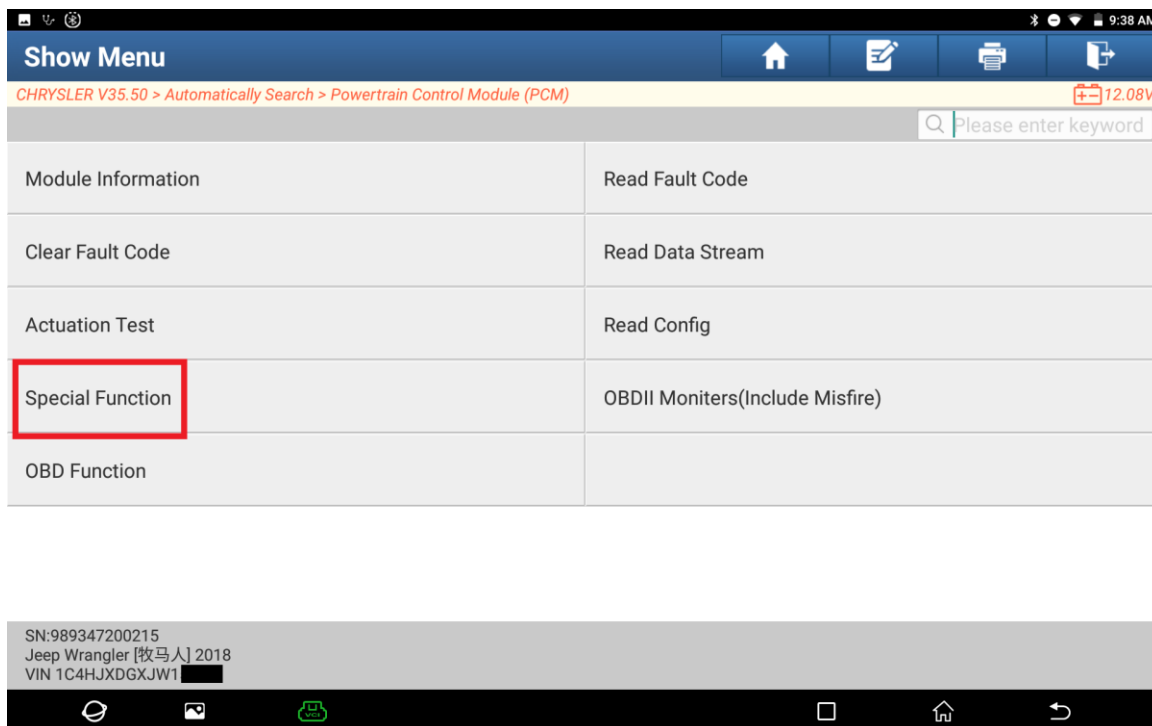


9. Click [DPF (Diesel Particulate Filter) Pressure Sensor Replacement].

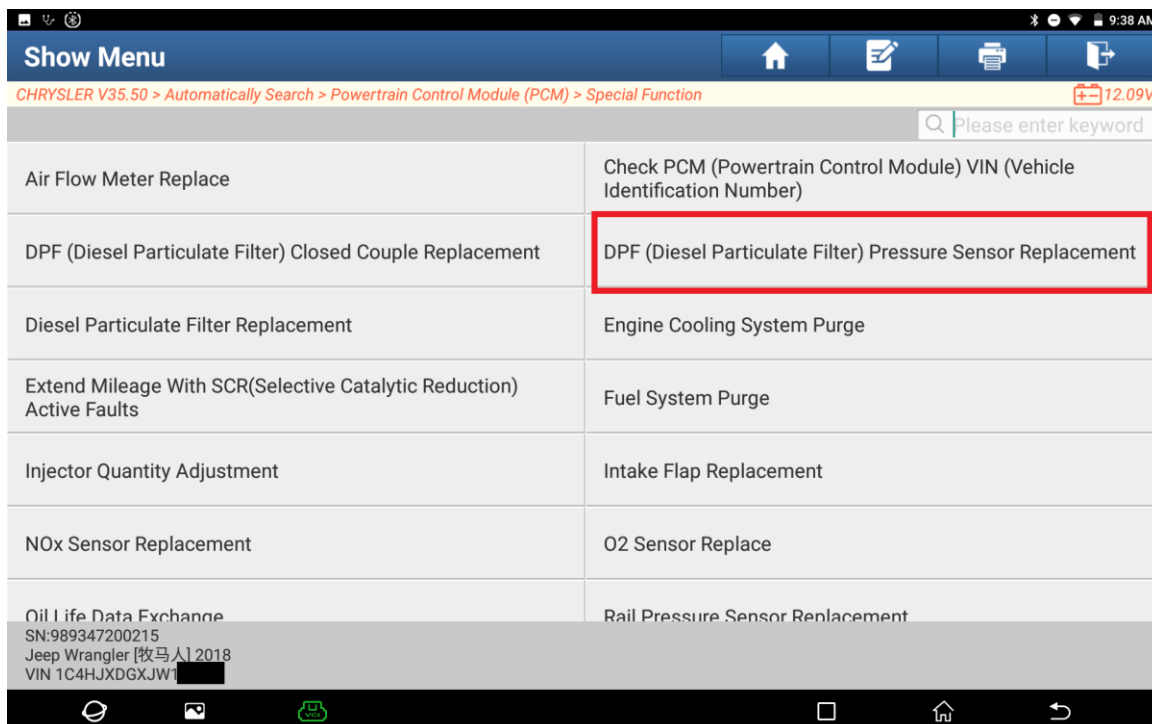


10. Click OK.

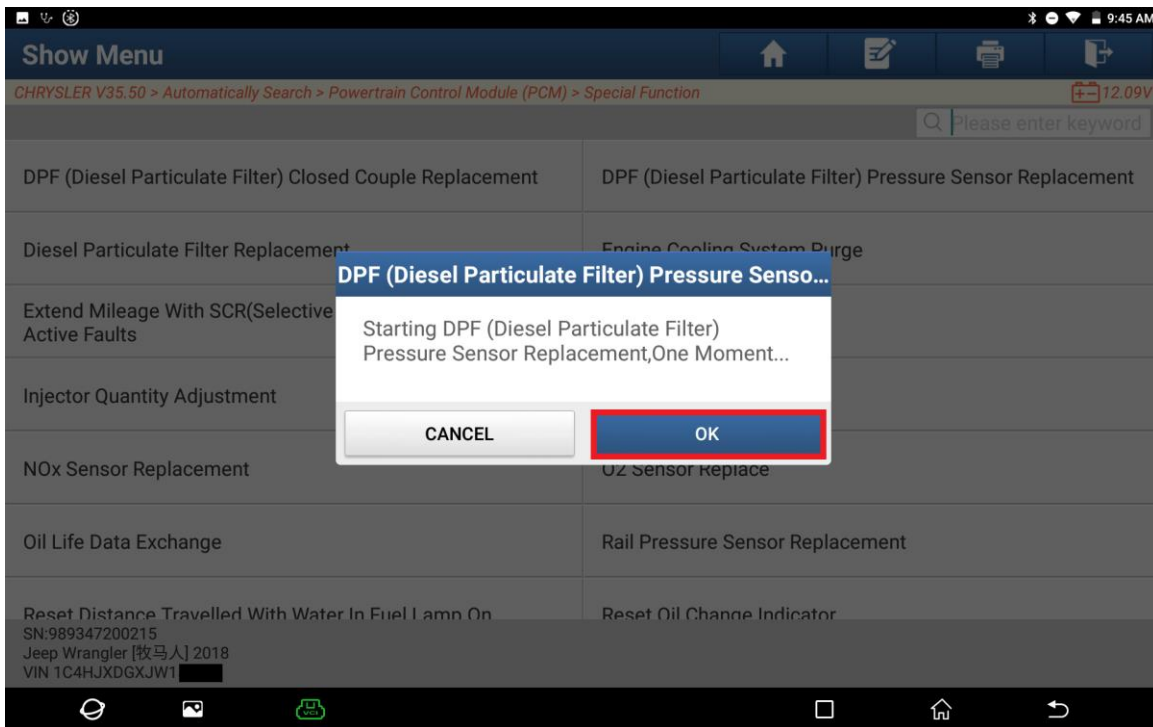


11. Click OK.

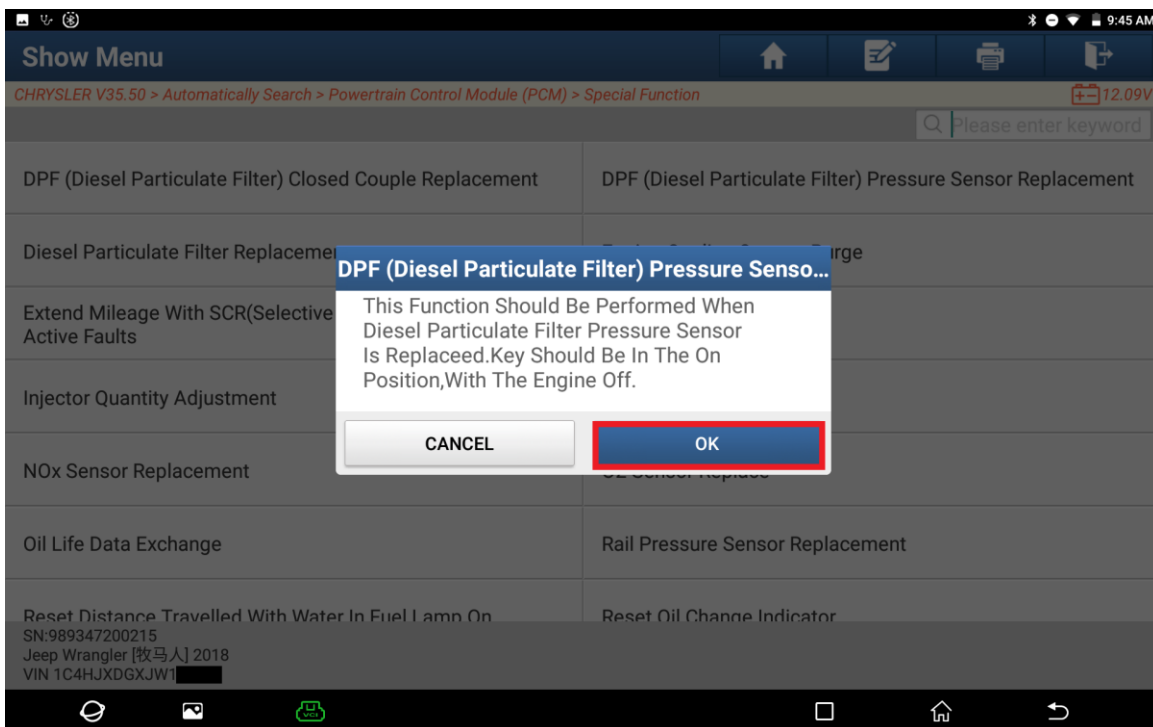

12. Click OK.

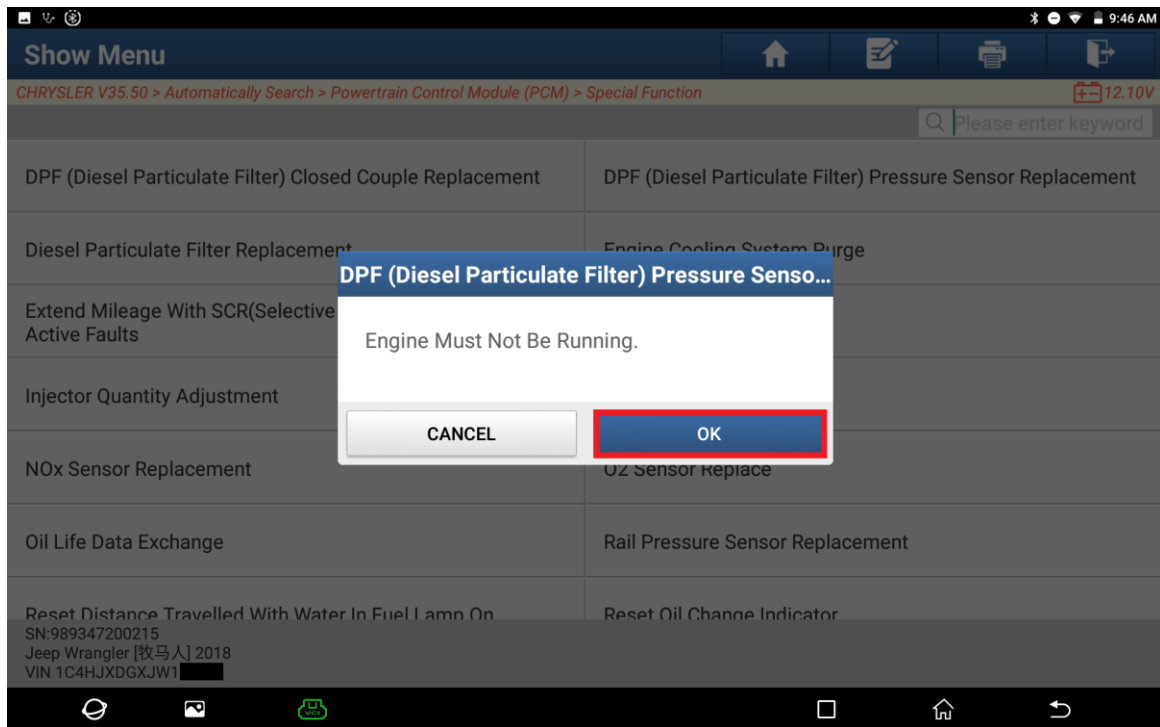

13. Click OK. The operations are completed.

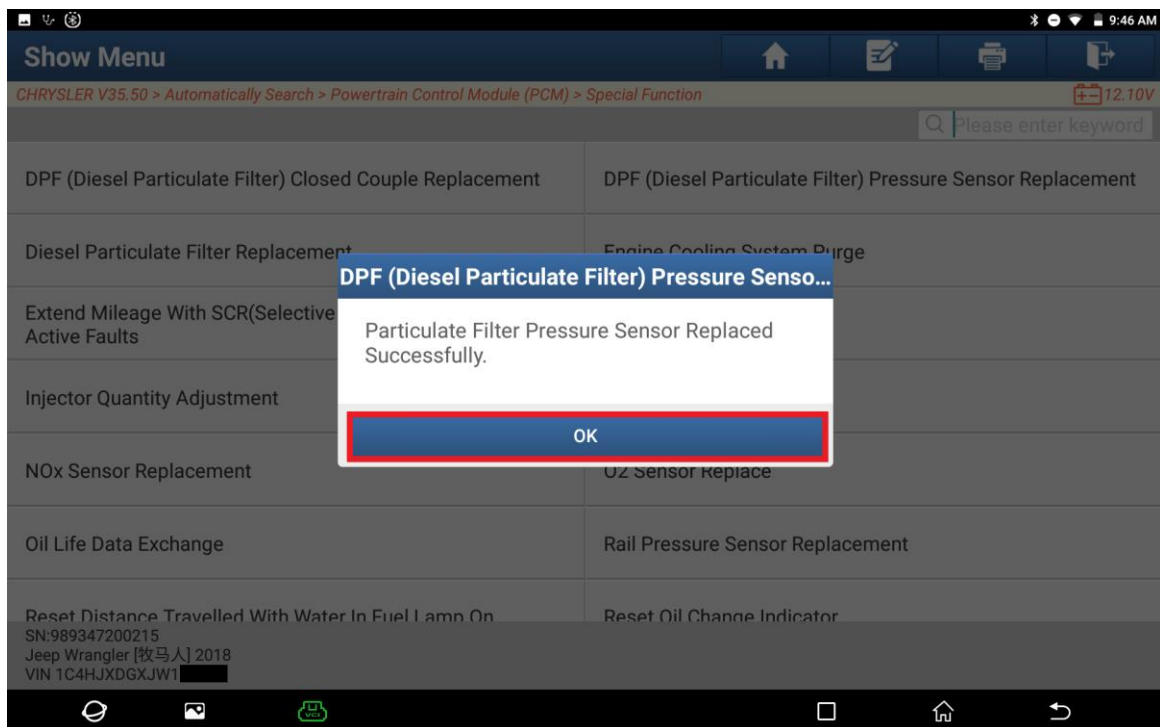

Statement:

The content of this document is copyrighted by LAUNCH TECH CO., LTD., and no individual or organization may quote or reprint it without consent.