

CVT (Continuously Variable Transmission) Oil Pressure Calibration

Tested Model: Lexus ES250 2024


Function Description: This function is used to recalibrate the oil pressure of the CVT (Continuously Variable Transmission) after replacing related components.



Supported Equipment: Launch PRO or PAD series comprehensive diagnostic equipment

Execution Conditions: None


Procedure:

1. On a PAD 5, choose [Local Diagnose], and then choose [LEXUS] for testing.

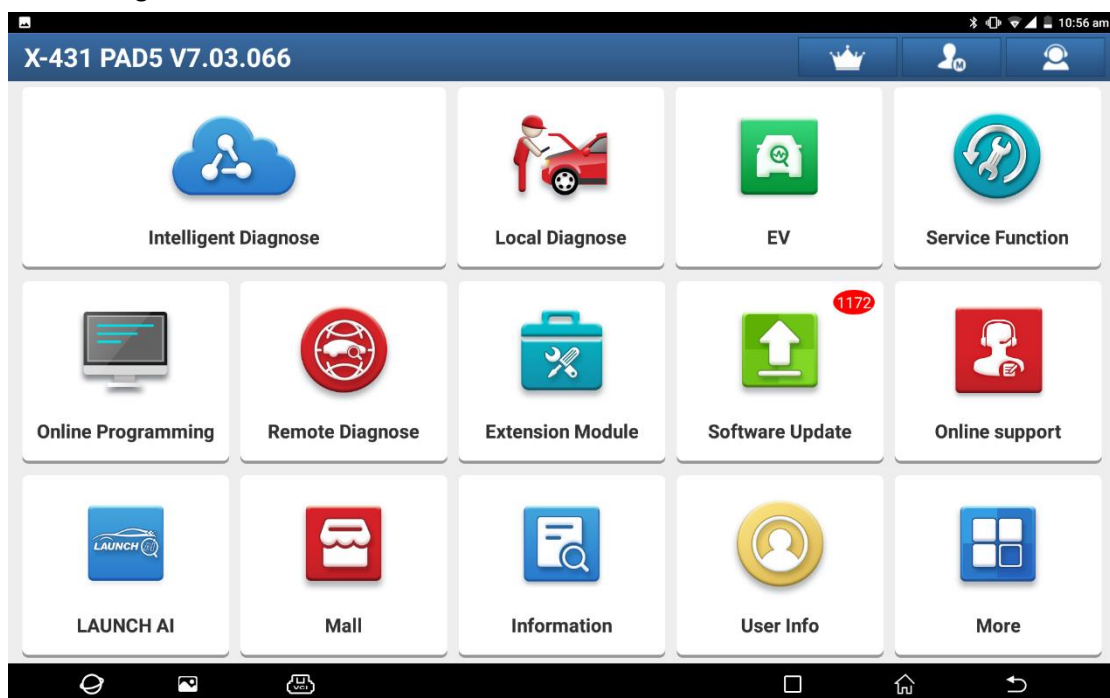

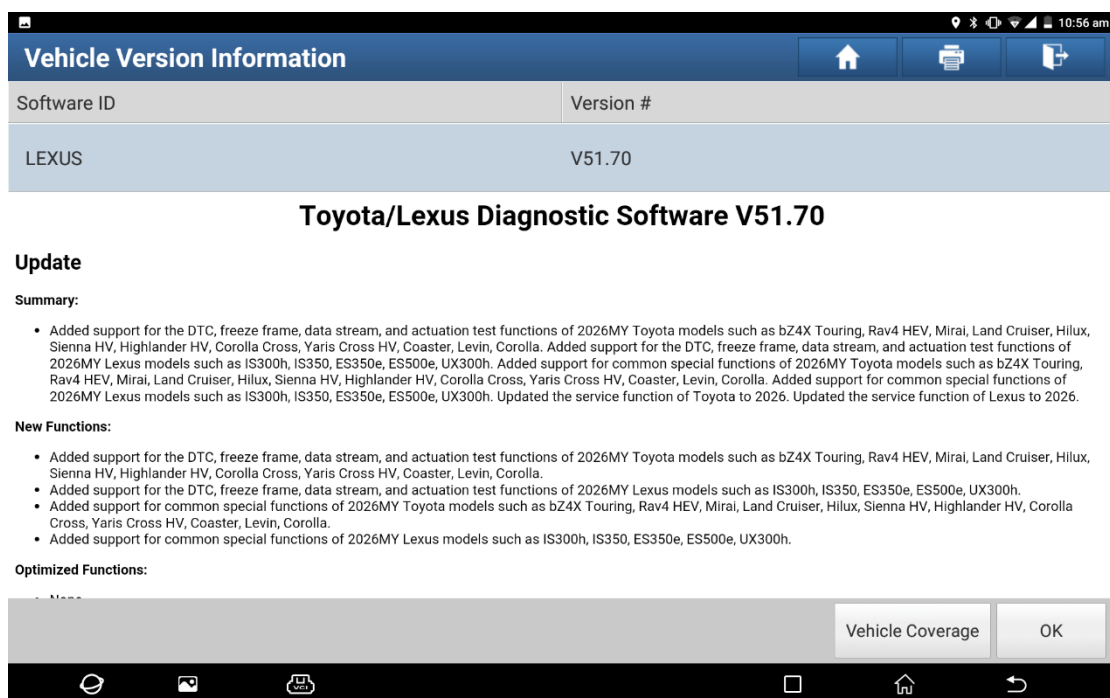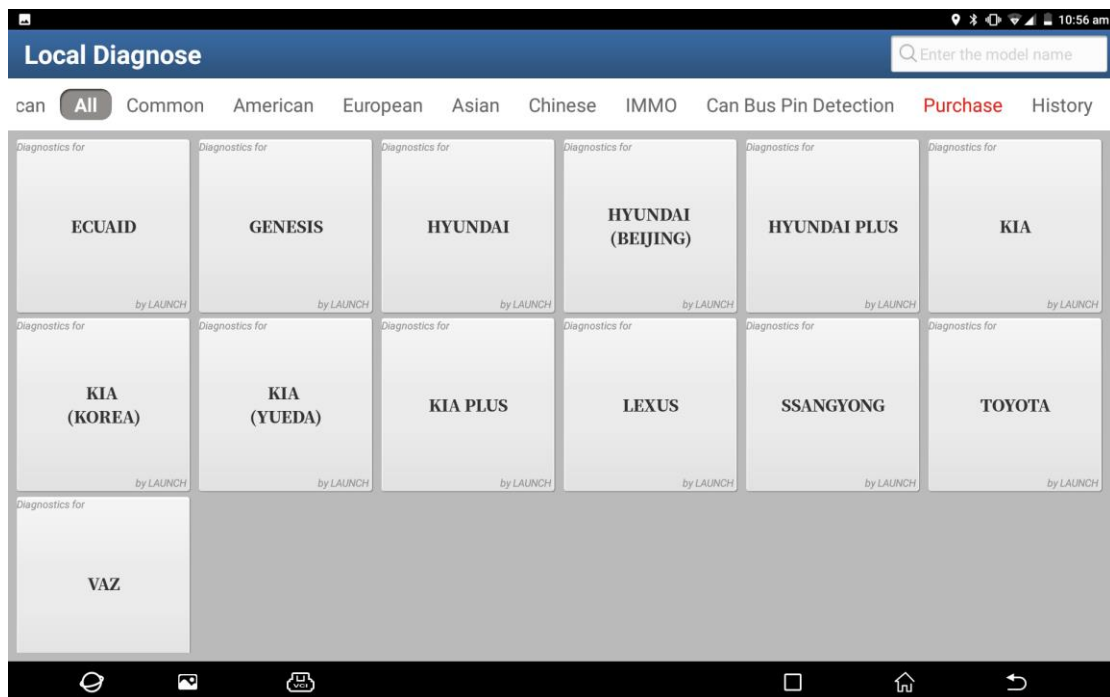

- Click [Automatic Search (Europe and Other)] to automatically identify the vehicle model. You can choose your region in [Set Area]; for this test, choose [Europe and Other].

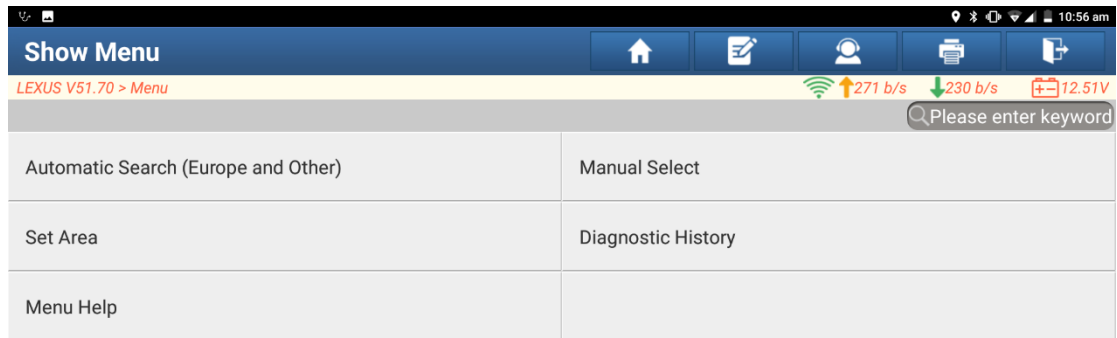

3. Confirm the vehicle information, and then click "OK".

Items	Description
Area	Europe and Other
VIN (Vehicle Identification Number)	JTHB11B1
Vehicle Name	ES250/ES260
Model	AXZA1#
Engine Type	A25A-FKS
Year	2023.11-2024.11
Travel Mileage	46371 km
Cruise Type	Others

Manual Select OK

SN:989:
LEXUS

4. Click TCM (Transmission Control Module) to enter the system.

System and Function

LEXUS V51.70 > Automatic Search > Europe and Other > ES250/ES260 > AXZA1# > A25A-FKS > 2023.11-2024.11...

Transmission Control Module (TCM)

*Support sliding up and down ■Normal ■

System Topology

System List

Multi-System Data Stream

ADAS Calibration

Common Special Function

Special Function

Customize Setting

K

ENTER


SN:989:
LEXUS ES250/ES260 2023.11-2024.11
VIN JTHB11B

Smart Detection System Scan Select Detection


5. Choose [Special function].




6. Choose [CVT Oil Pressure Calibration].

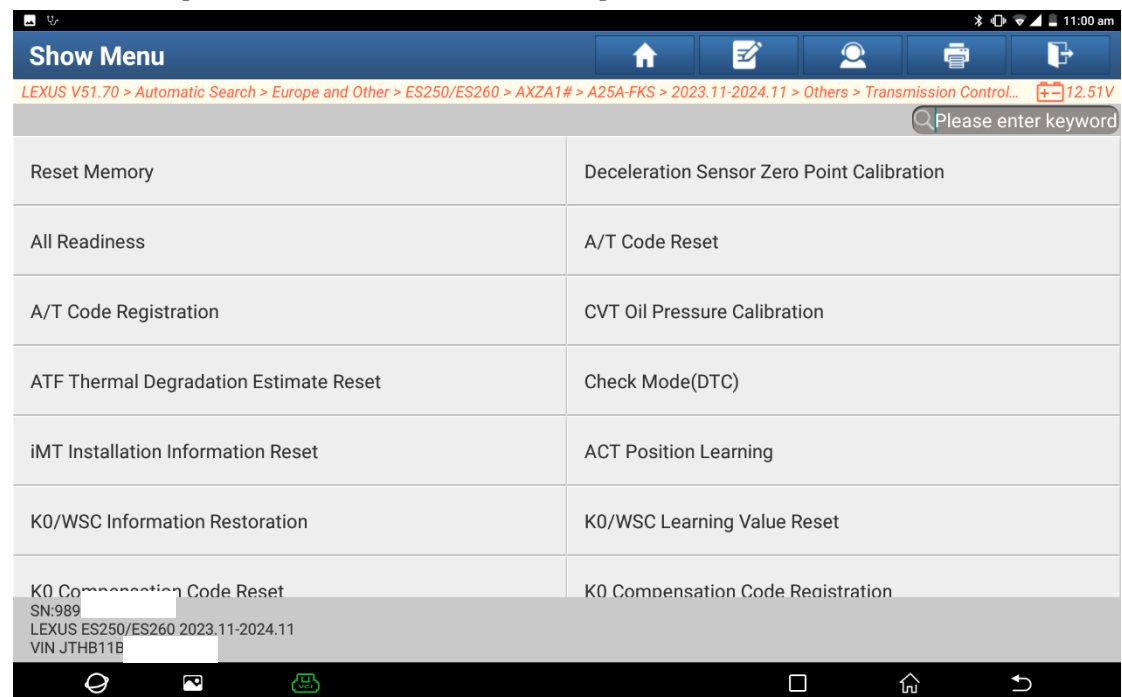


7. Click "OK".

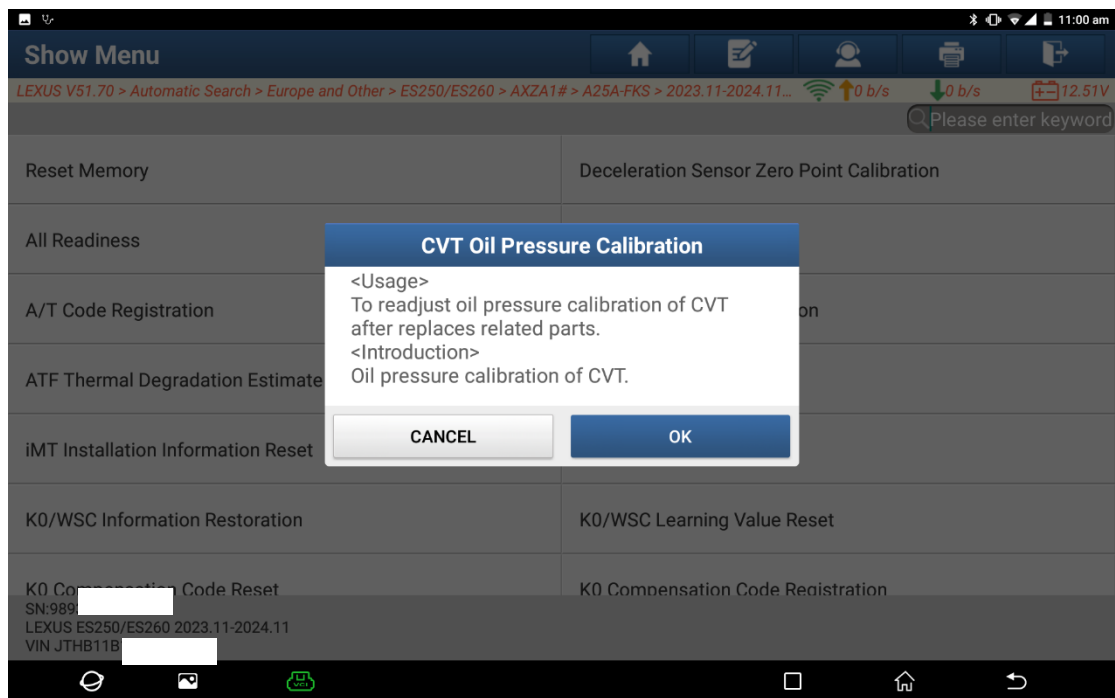


8. Click "OK".

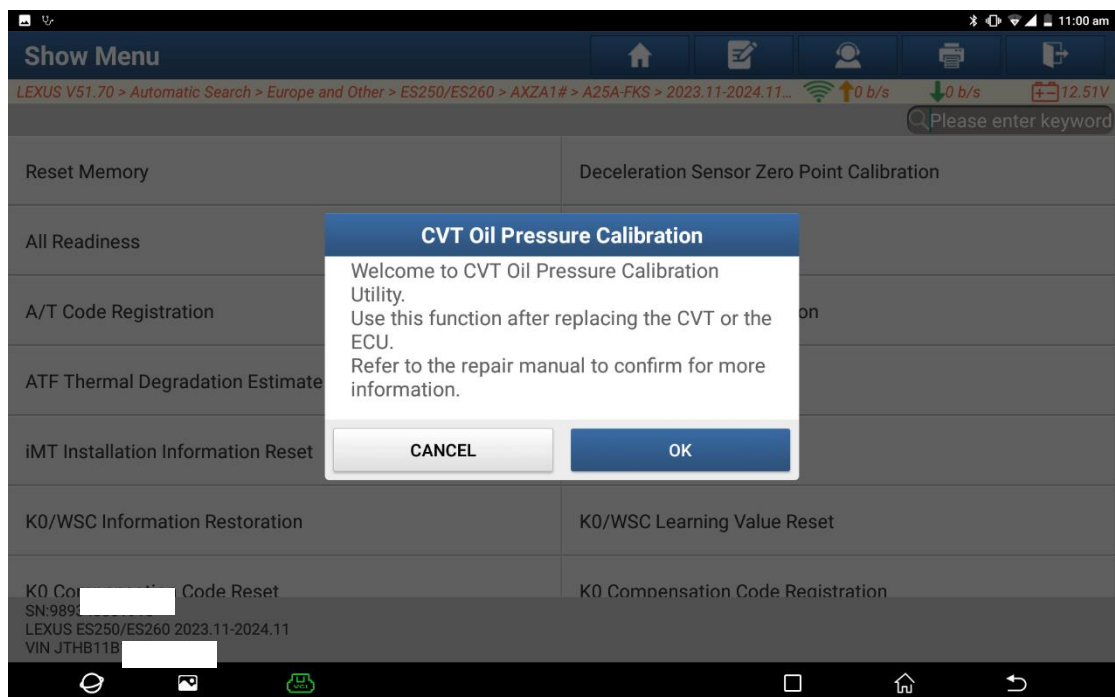

9. Follow the on-screen prompts and then click "OK".

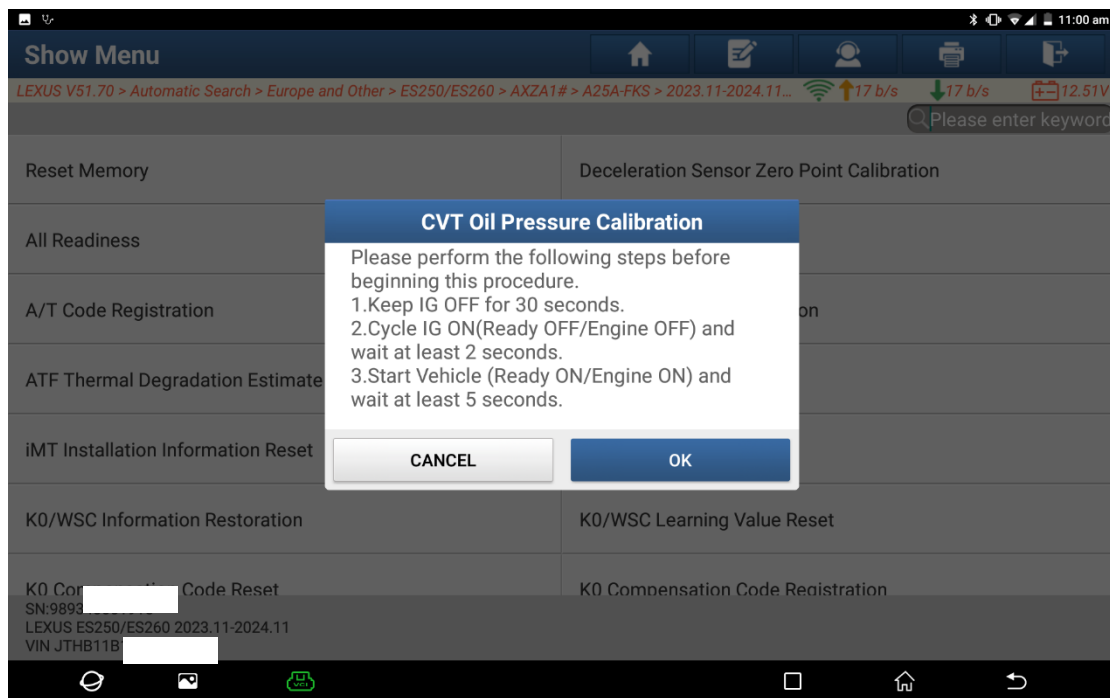

10. CVT oil pressure calibration is completed. Click "OK" to exit the function.

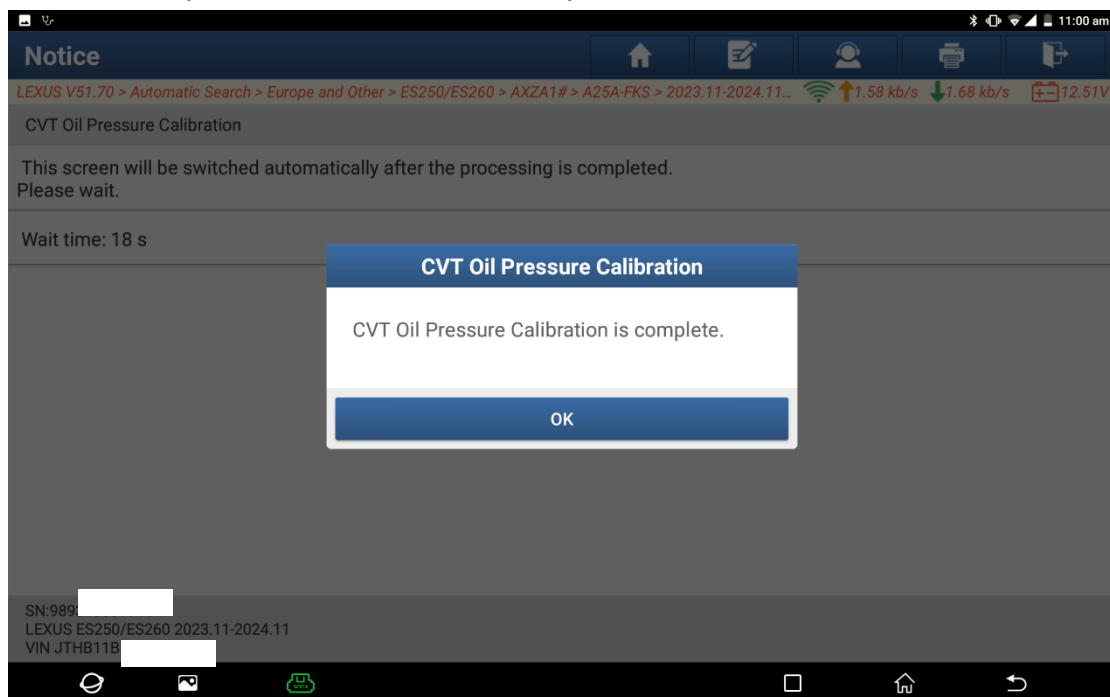

Statement:

The content of this document is copyrighted by LAUNCH TECH CO., LTD., and no individual or organization may quote or reprint it without consent.