

Oil Service Reset

Tested Model: Citroen JUMPER 3 EURO6

Function Description:

This function is typically used in the following scenario:


1. After an oil change



Execution Conditions:

- Battery level normal
- Vehicle stationary
- Engine OFF
- Ignition switch in the ON position

Procedure:

1. On a PAD 5, choose [Local Diagnose], and then choose [CITROEN] for testing.

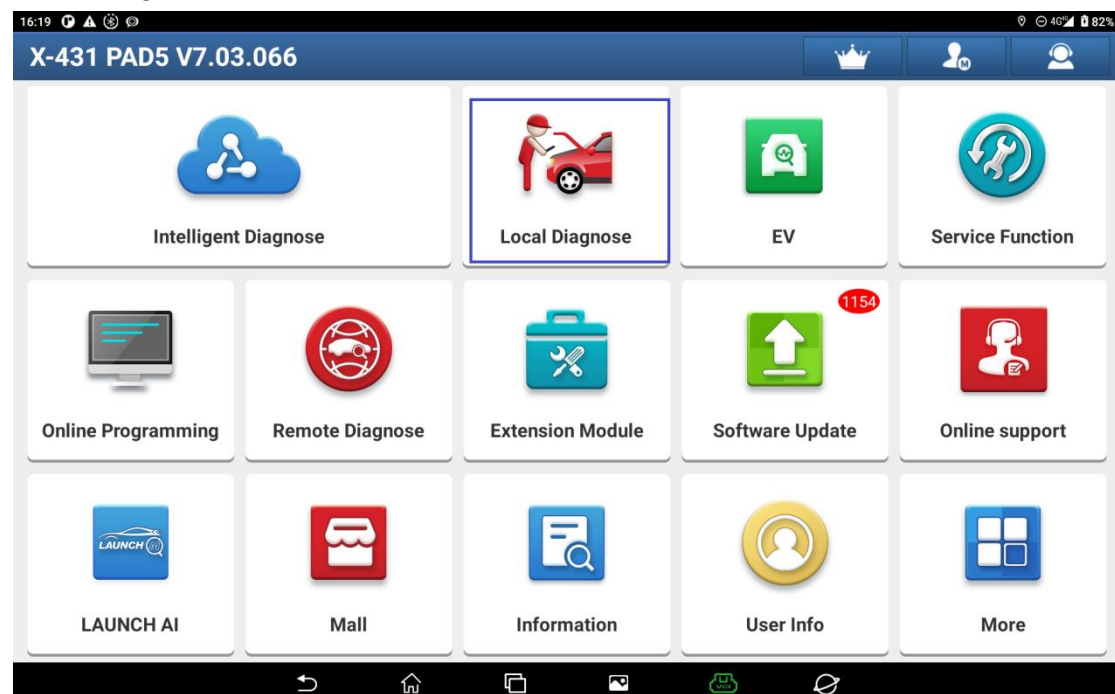

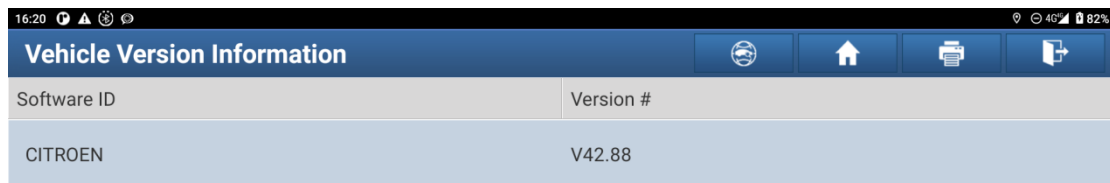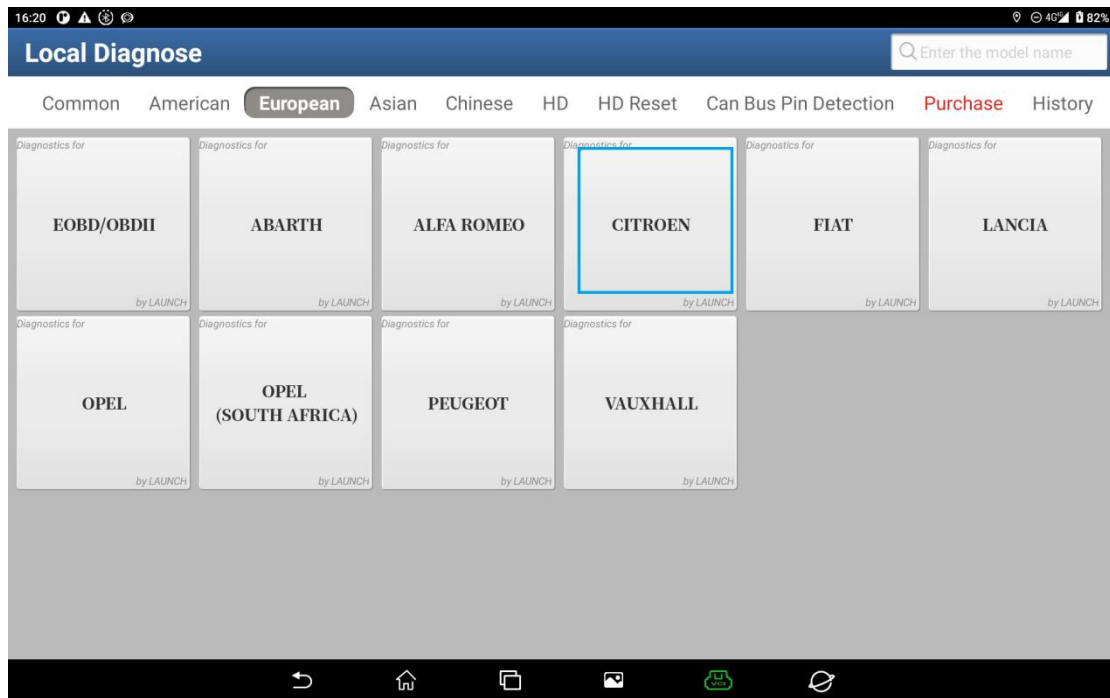

Citroen diagnostic software V42.10

Software introduction

Perform basic function:


- Read vehicle version information
- Read vehicle failure information
- Clear vehicle failure information
- Read data stream
- Actuation test

Perform special function:


- **Matching keys**
- **Maintenance reset**
- **Throttle learning**
- **Replace spare parts**
 - Replace one or more injectors
 - Replace electronic throttle chamber
 - Replace intake camshaft phase regulator
 - Operate timing belt
 - Replace cylinder head
 - Replace crankshaft sensor/field




2. Choose [Automatically Search] to automatically identify the vehicle model.

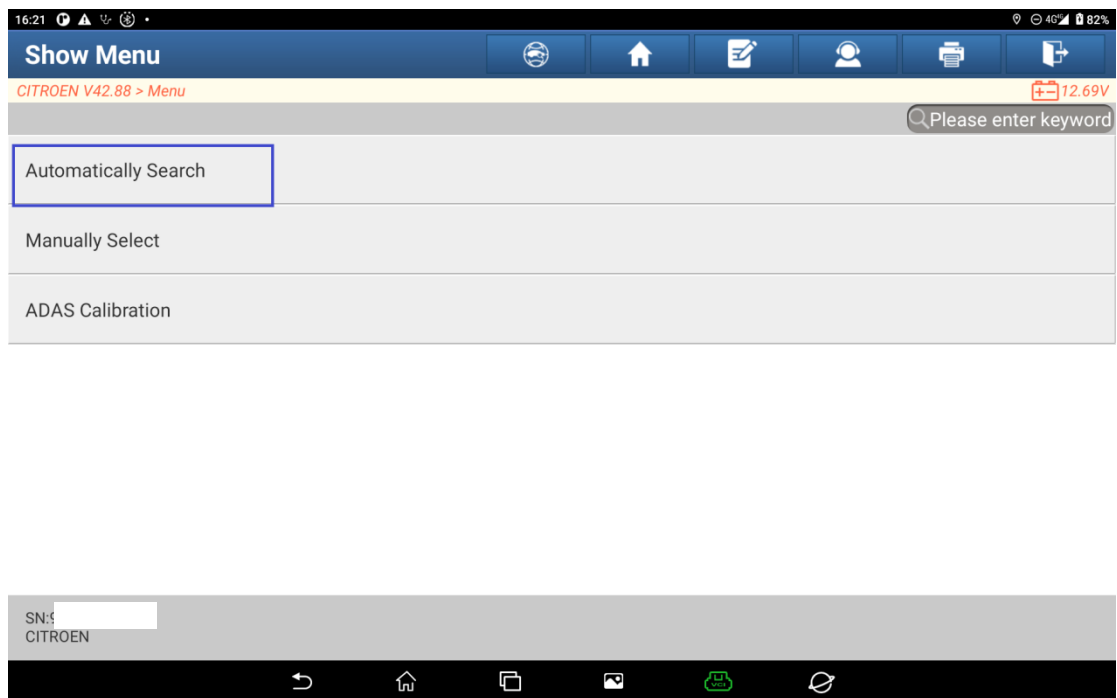


3. Confirm the vehicle information, and then click "YES".

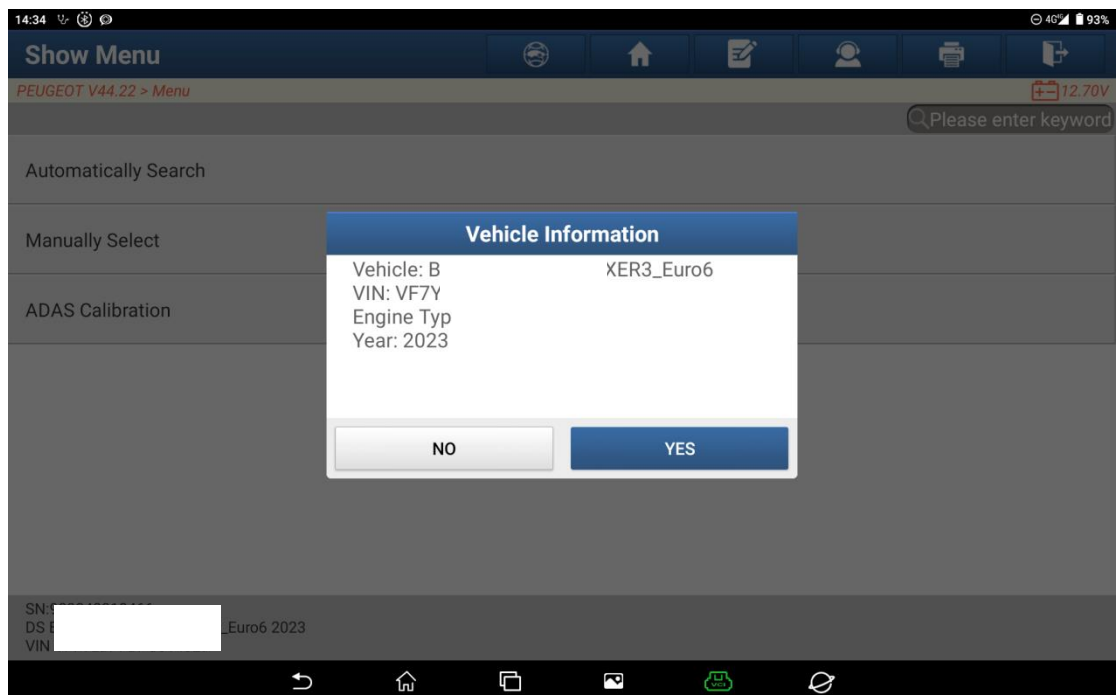

4. Choose [Engine ECU].

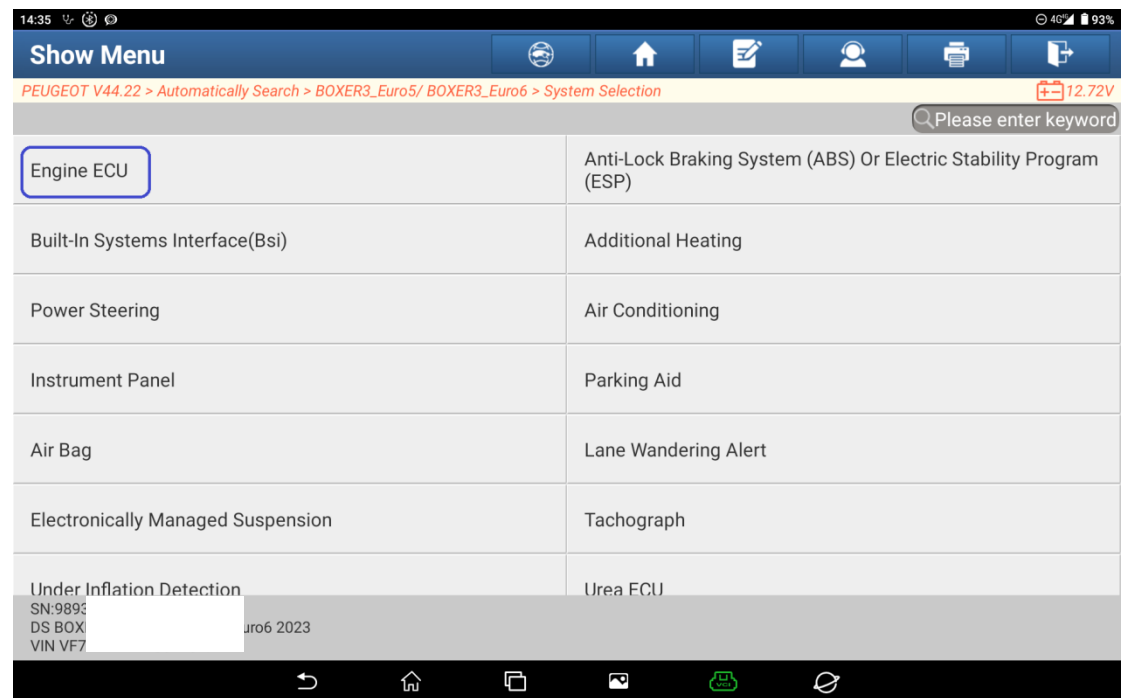


5. Choose [Special Function].

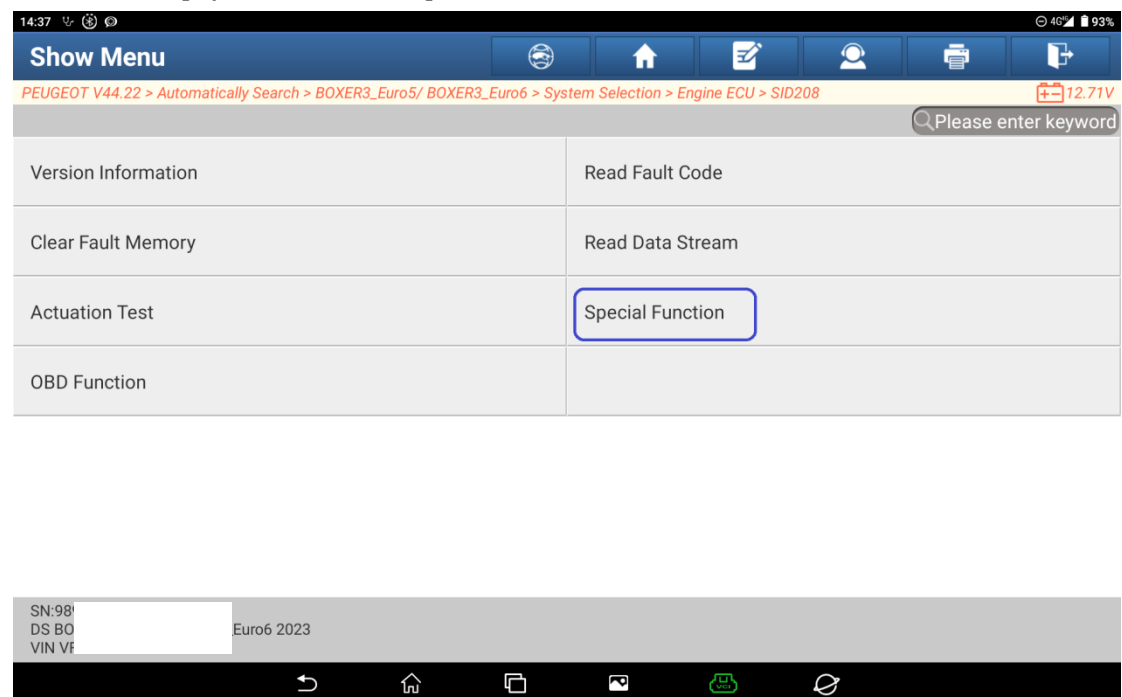


6. Choose [Overhaul].



7. Confirm that the conditions shown below are met, and then click "OK".

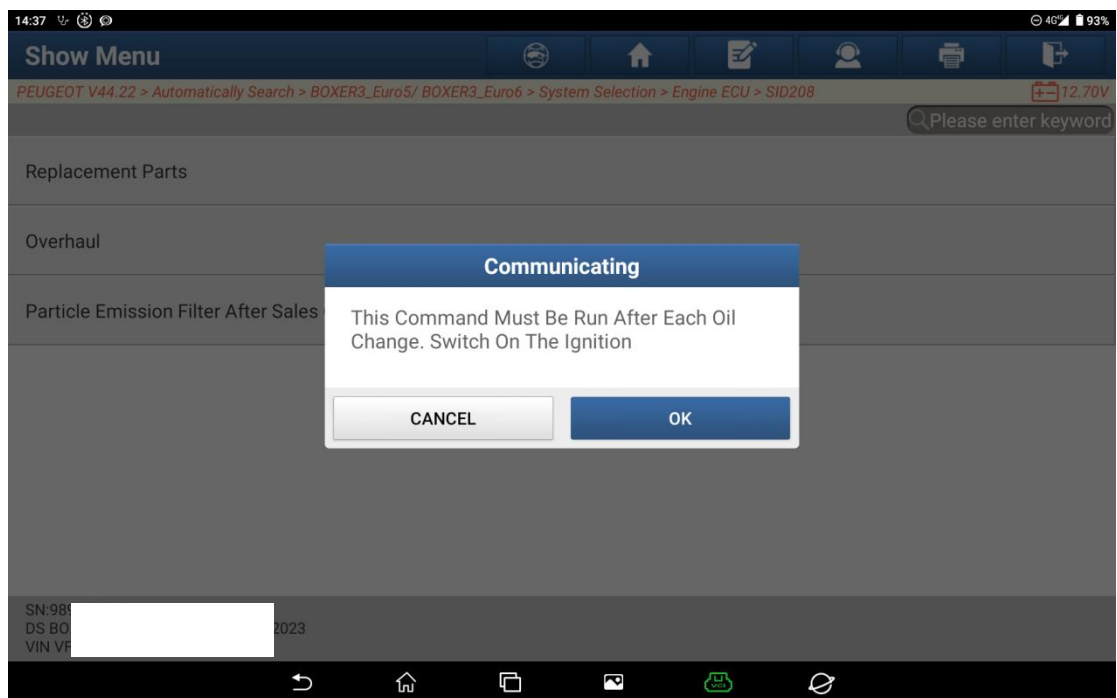

8. Function completed. Click "OK" to exit the program.

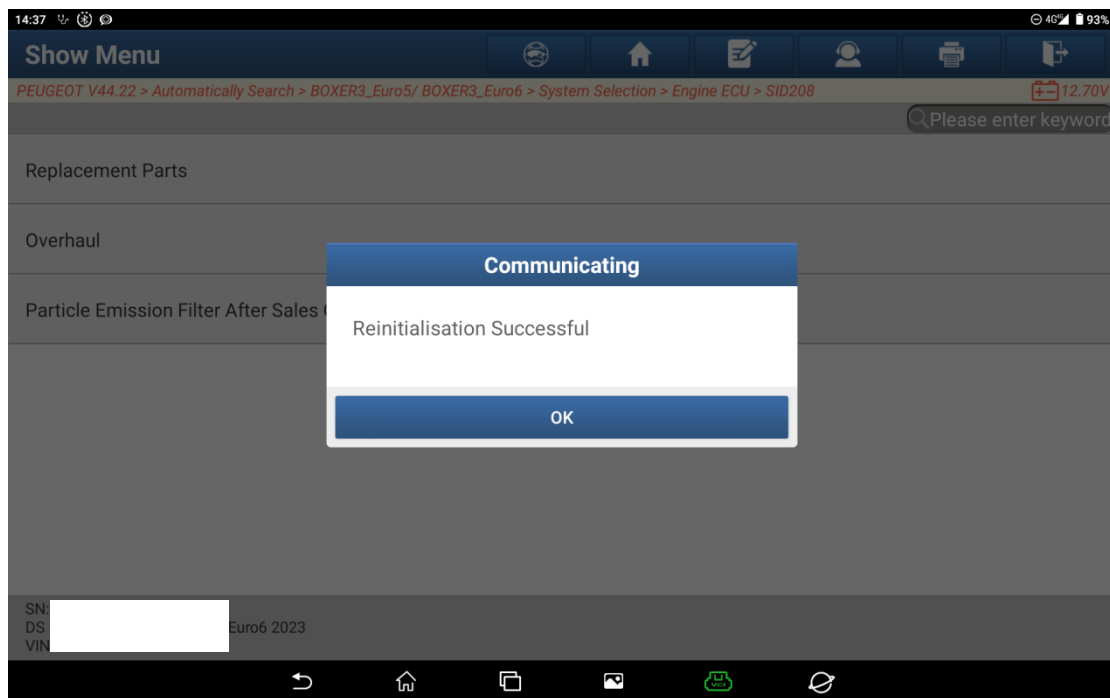

Statement:

The content of this document is copyrighted by LAUNCH TECH CO., LTD., and no individual or organization may quote or reprint it without consent.