

Operation method of resetting CHRYSLER ProMasterCity enhanced automatic oil change indicator


Supported equipment: Full range of comprehensive diagnostic equipment of
Launch



Current equipment: PAD V

Function description: CHRYSLER ProMasterCity would need to reset the
automatic oil change indicator after the maintenance is finished

Tested vehicle model: CHRYSLER/2021/ProMasterCity, VIN:
3C6MRVJG9ME5*****

1. Use PAD V to select CHRYSLER software in [Local Diagnose] to test;

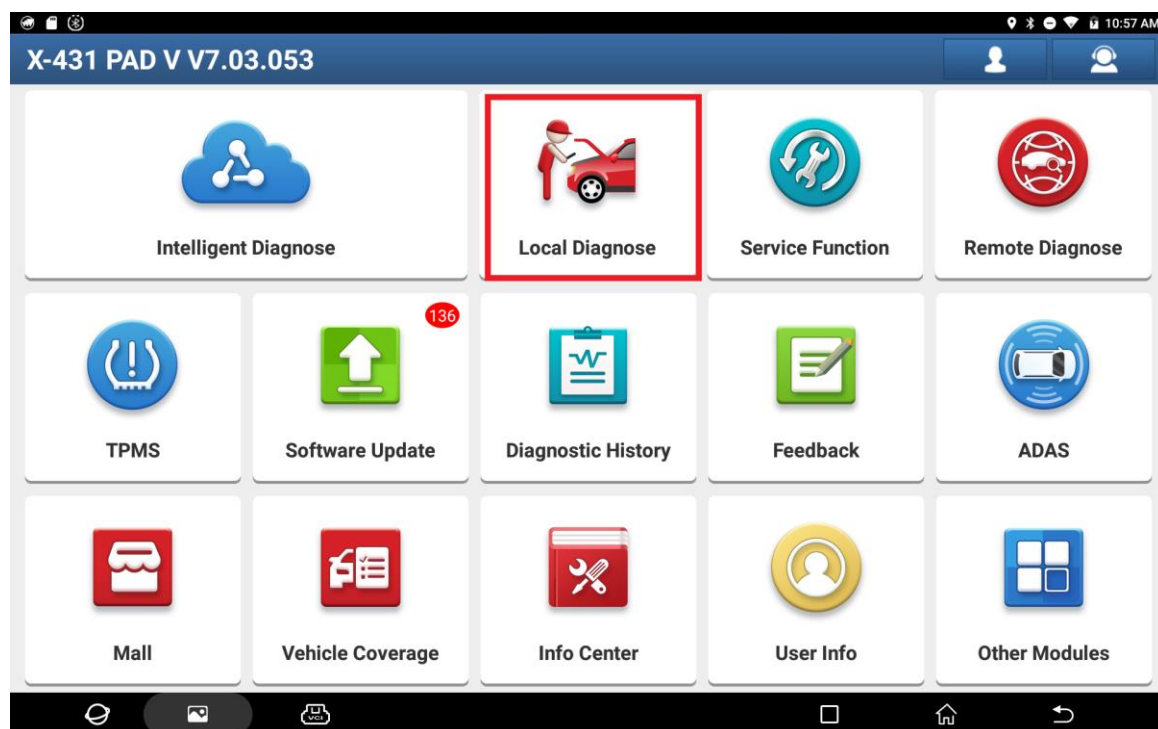

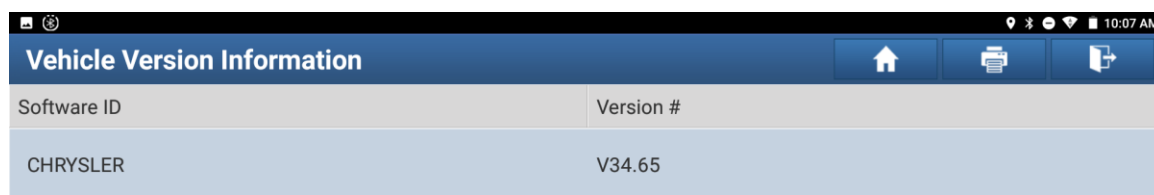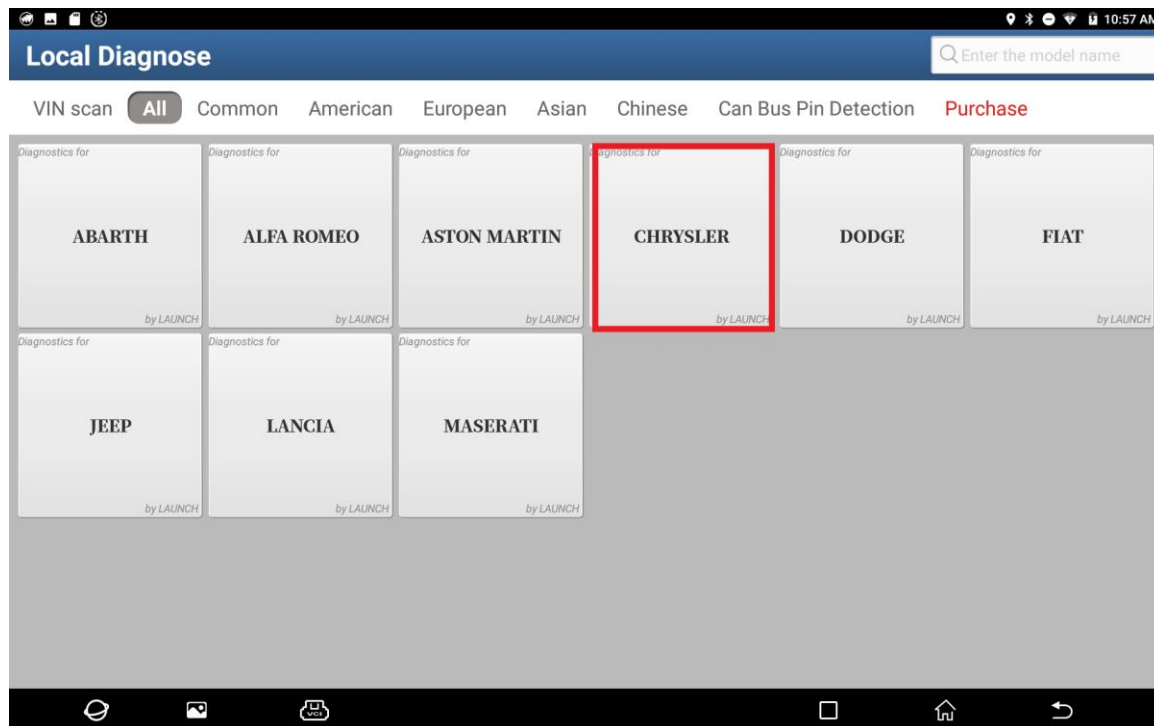

CHRYSLER/JEEP/DODGE V34.65

Introduction

ECU Coverage:

Engine, Automatic Transmission, Anti-lock Brake, Airbag, Body, A/C, Dashboard, Memory Seat, Trap-door, Steering Angle, Wireless Control Module, Tire Pressure, etc.

Basic Functions:



- Read Car Computer Information
- Read Car Fault Information
- Clear Car Fault Information
- Read Car Running Data
- Actuation Test For Car Component

Special Functions:


- **ENGINE [Engine System]:**
Check PCM Odometer, Check PCM VIN, Learn ETC, Reset ECU, Reset Memory, Clear Variable Line Pressure(VLP) Counters, Relearn Cam/Crank, Injector Quantity Adjustment, View/Reset duty cycle accumulators, View/reset trip information accumulators, Enable / Disable vehicle features, Reset Nox adsorber counts, Reset after treatment trip information, Turbo actuator pre-align / self calibrate, Reset regenerative filter timers, Reset Fuel Pressure Limiting Valve Accumulators, Stationary Desoot, View/Reset Duty Cycle Maps, Idle Shutdown Timer Adjustment, Oil Change Monitor Type, View/Reset NAC After Treatment Over Temp Events, Manual DPF Regeneration, DPF Replacement, ECM Replacement




2. Click [16 PIN Connector] and select [Automatically Search] menu to automatically identify the vehicle model;

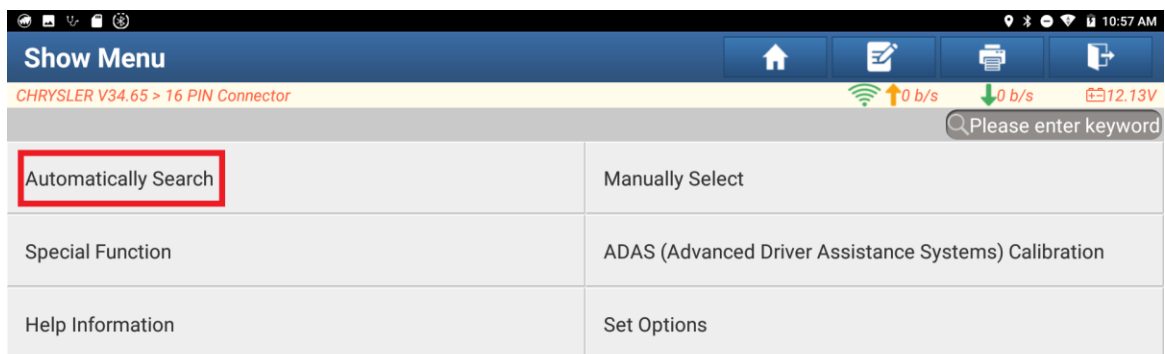
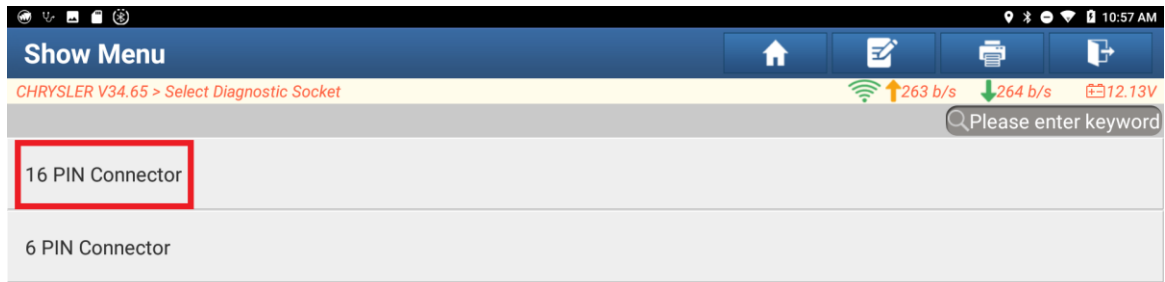




3. Click “OK” and prompt says that [SGW] needs to be unlocked;

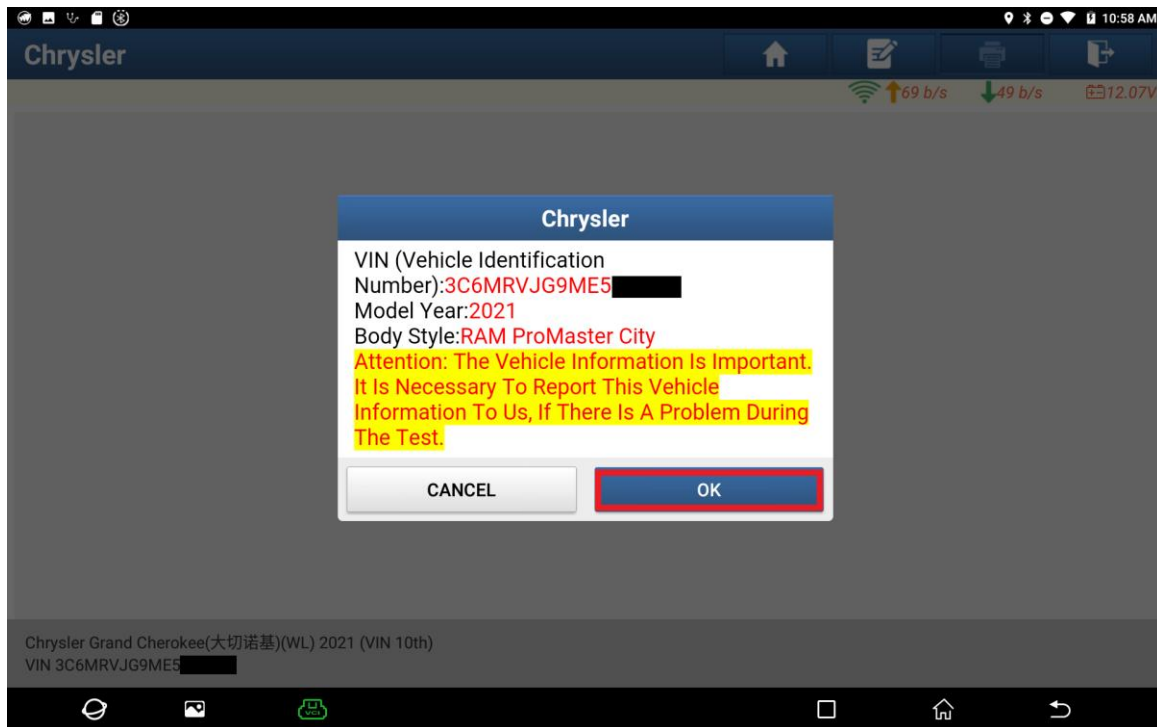


4. Click “Yes”, select [North America], and then enter the FCA account that you have purchased:

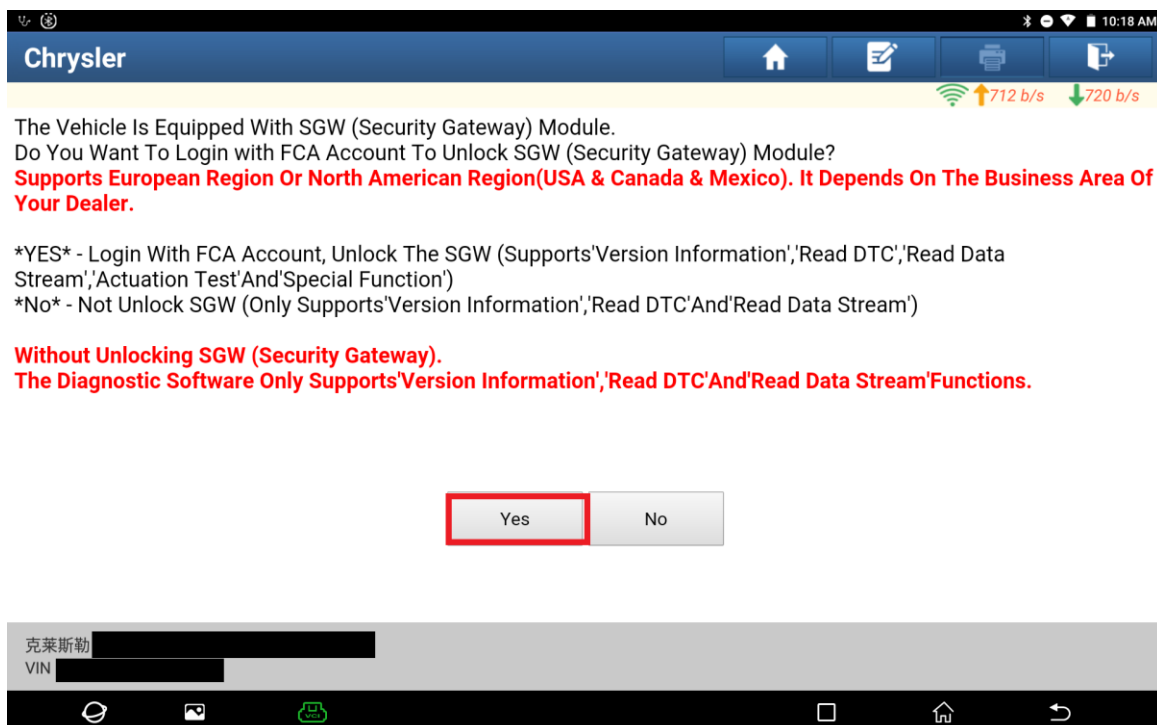

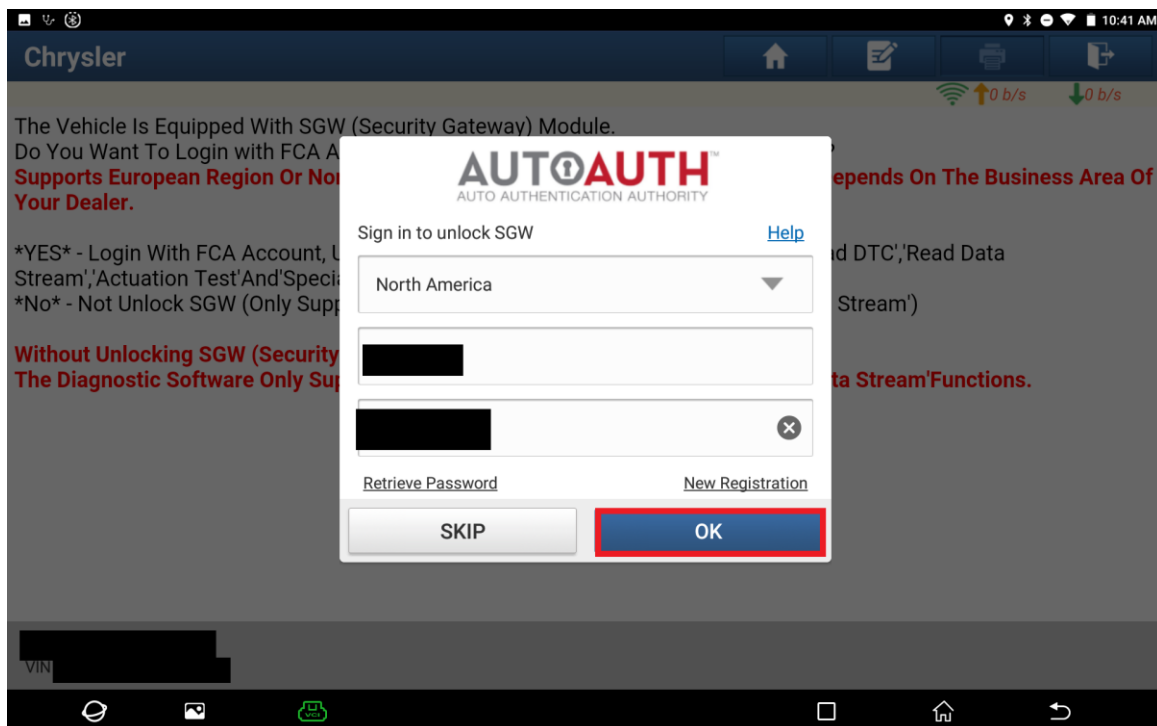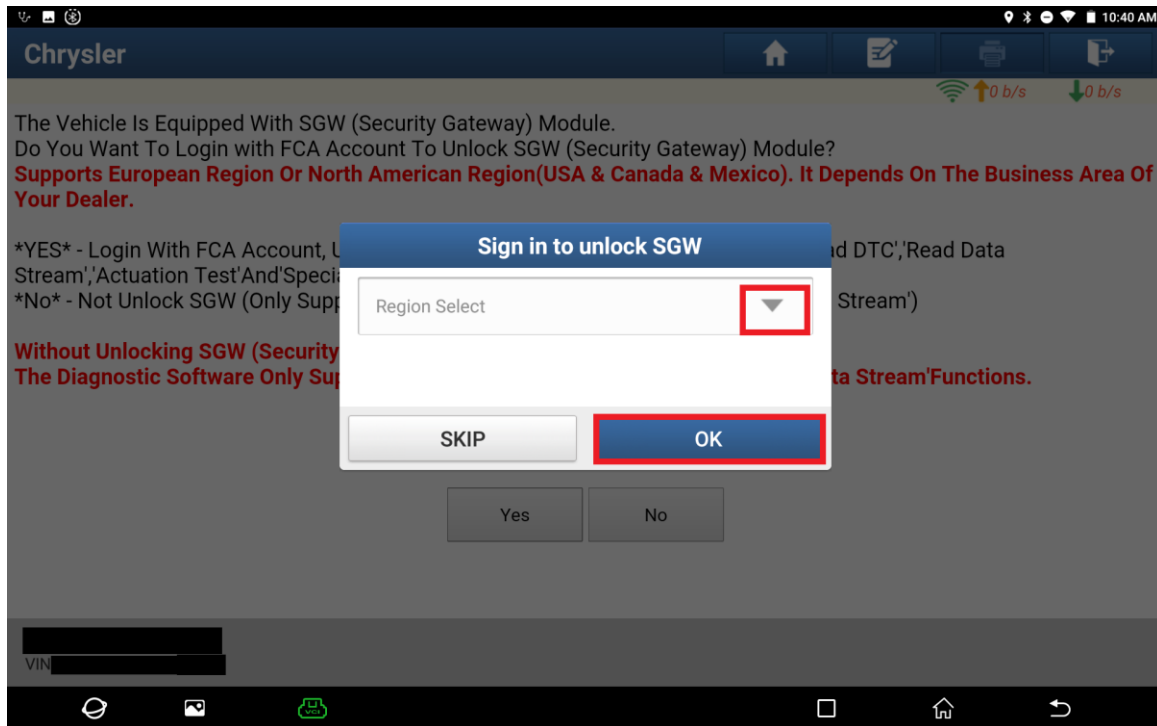


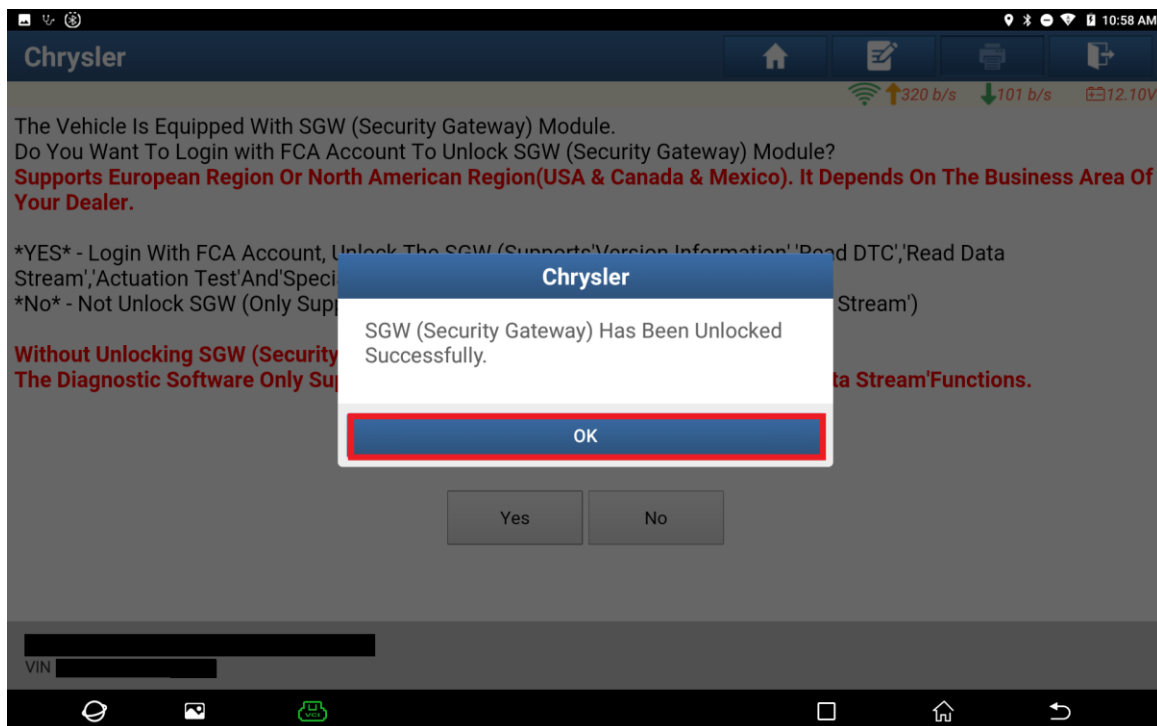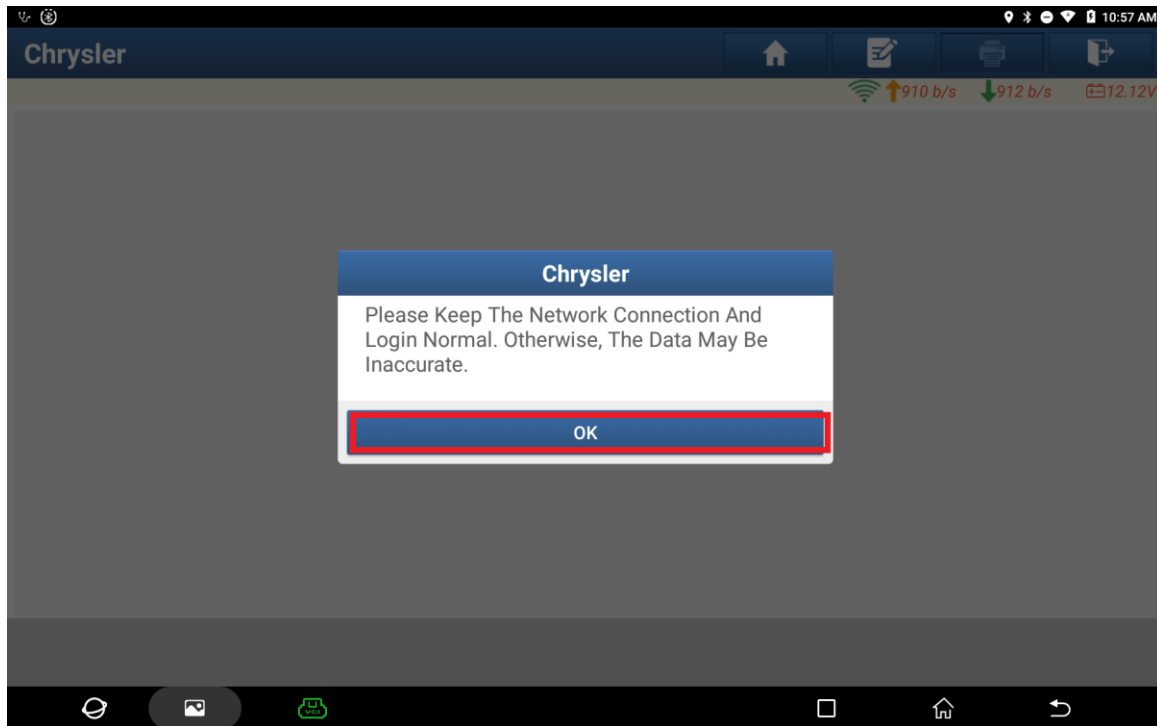


5. Click “OK”, and click [Smart Detection] with PAD V to scan all systems of the whole vehicle;

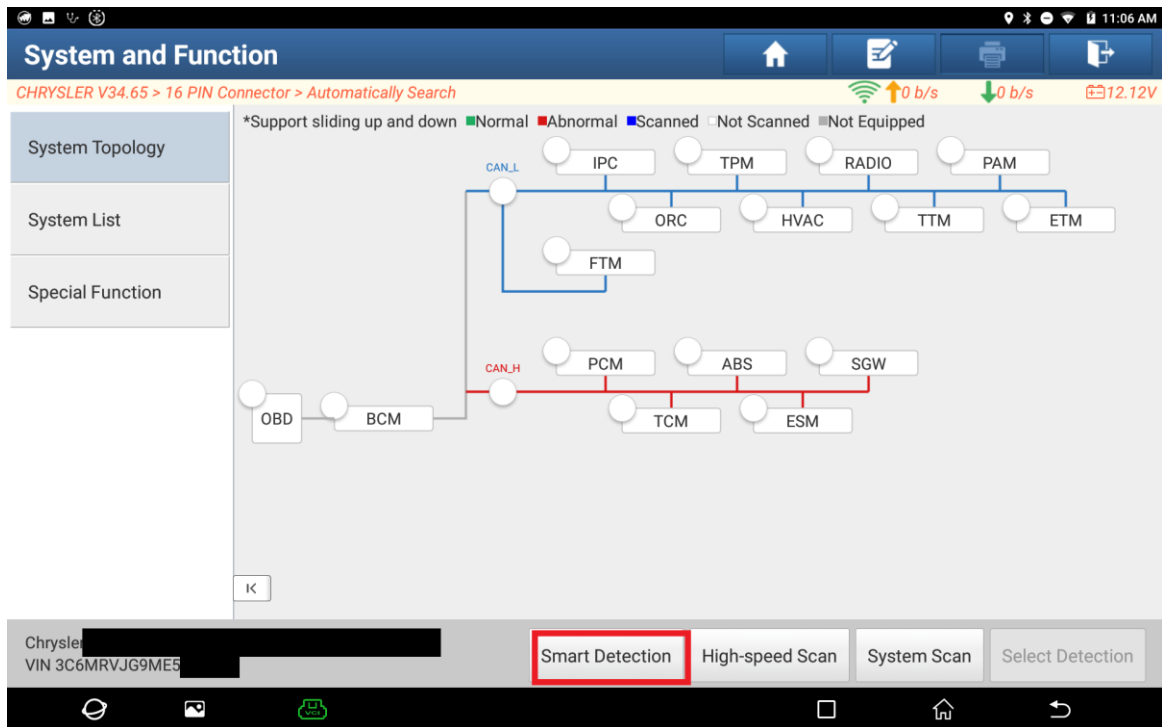


6. Click [PCM (Powertrain Control Module)] to enter the system;

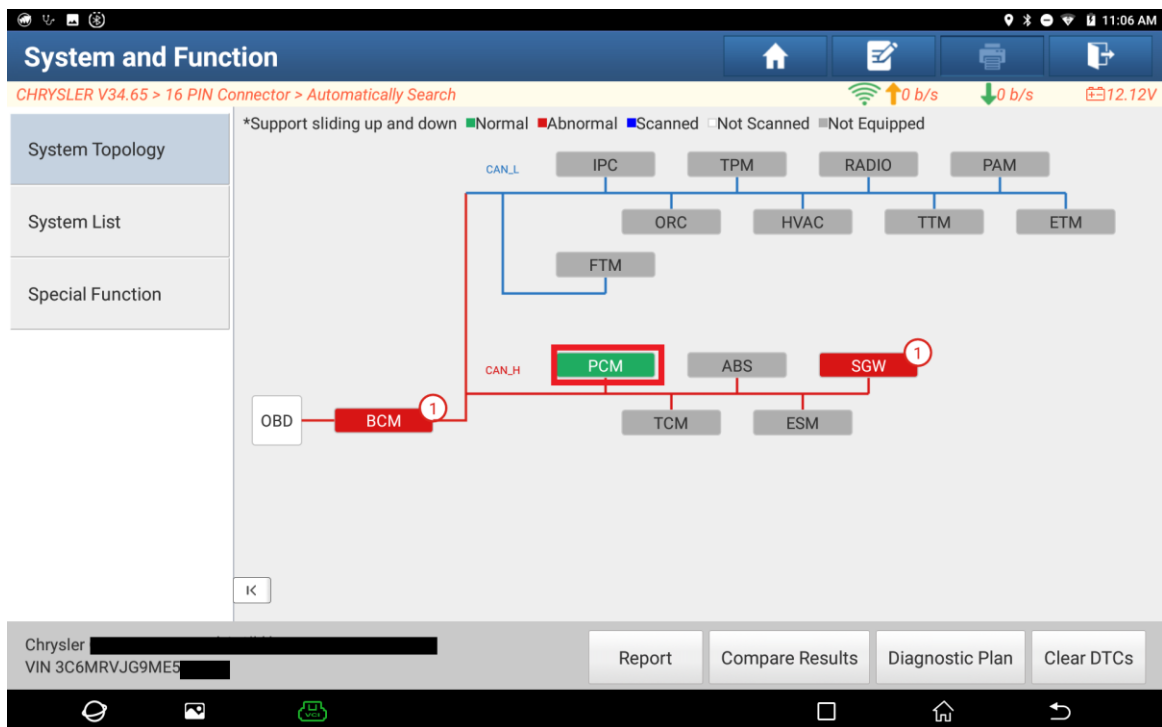


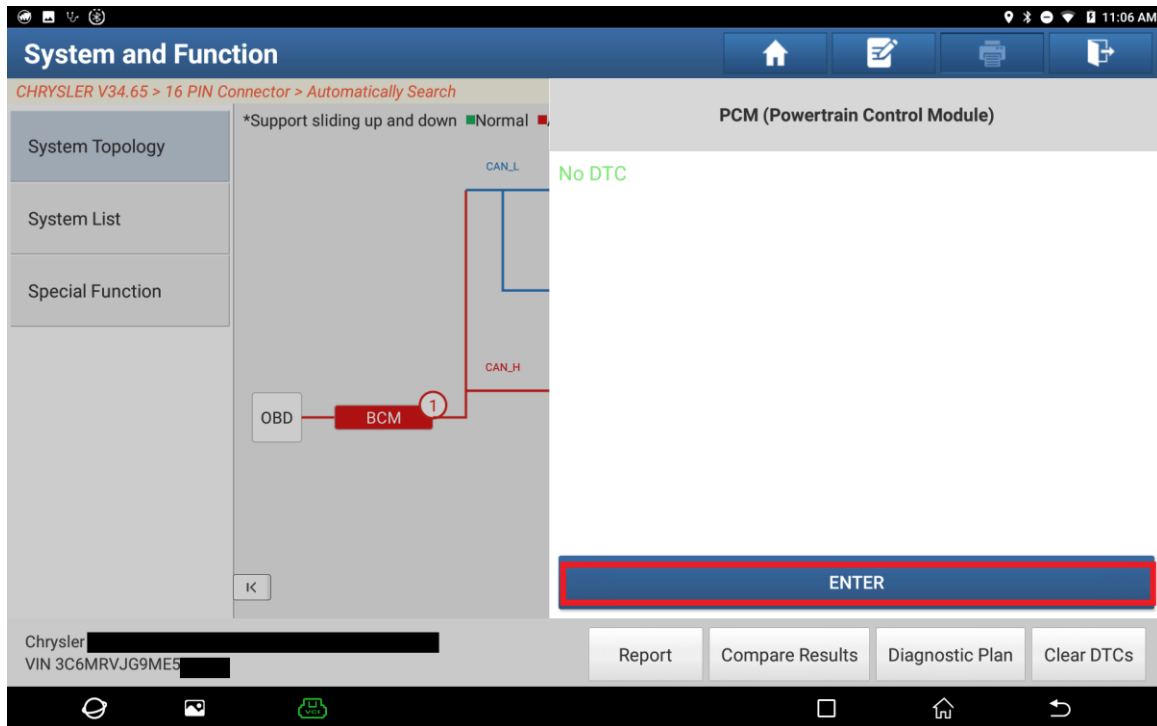


7. Click [Special Function];

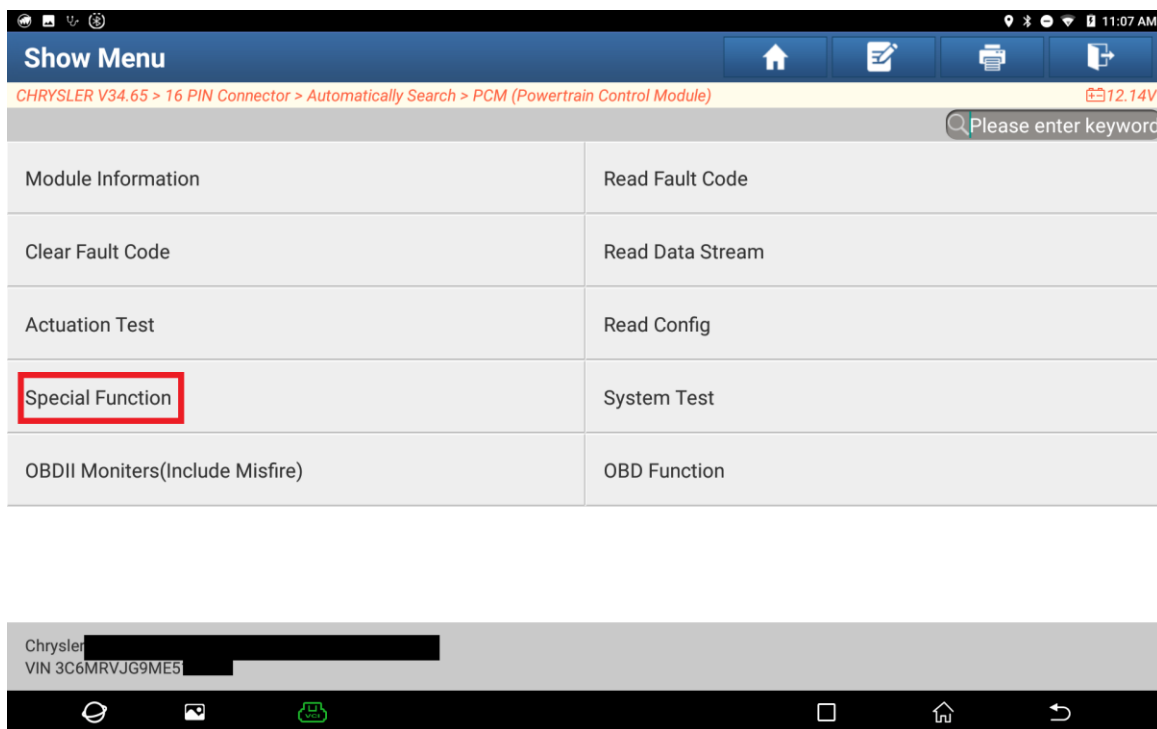


8. Click the function [Reset Enhanced Automatic Oil Change Indicator];

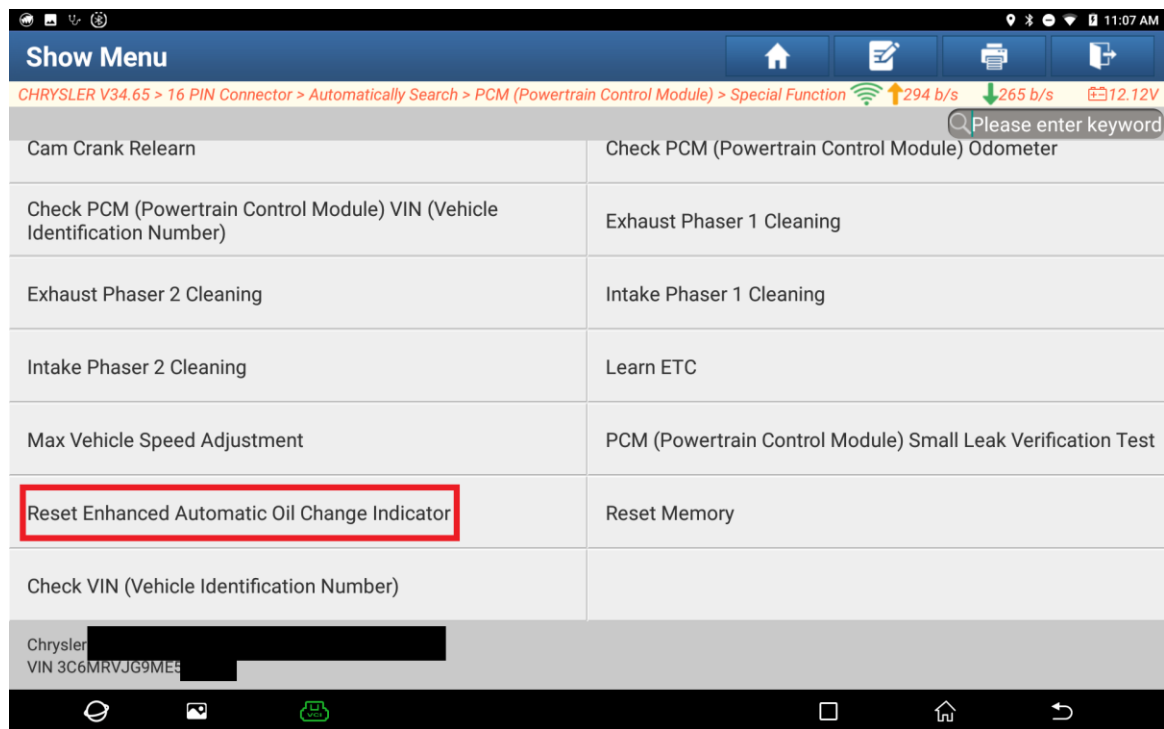


9. Click “OK”;

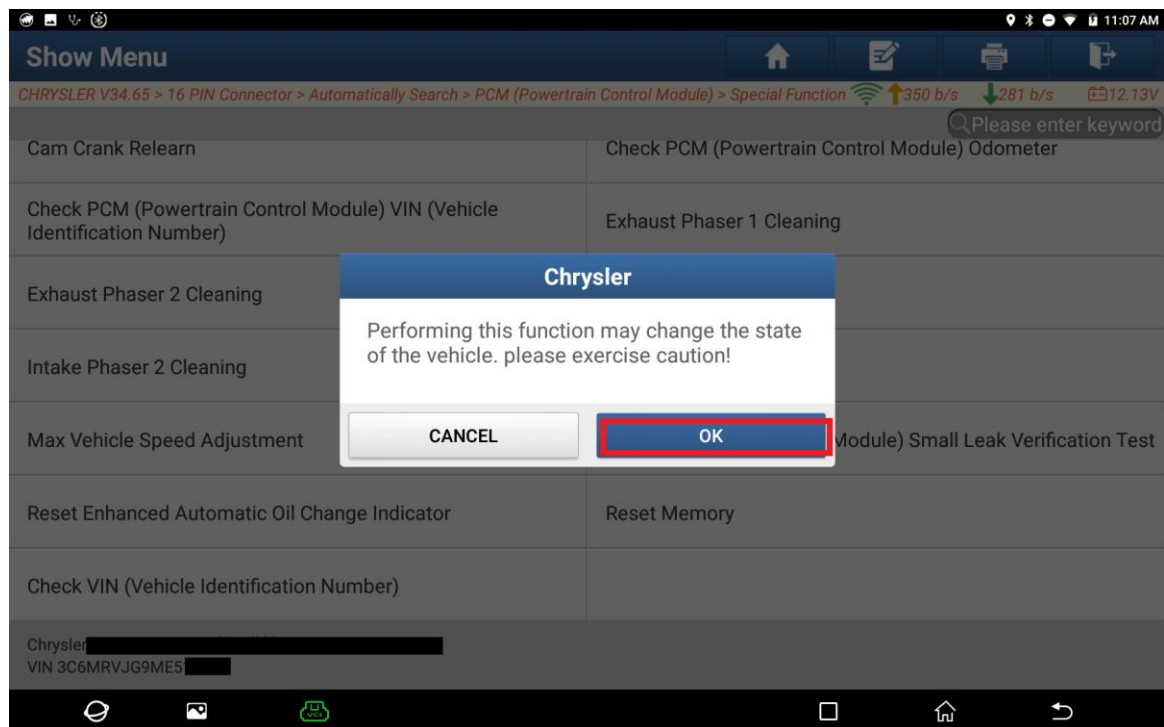


10. Click “OK”;

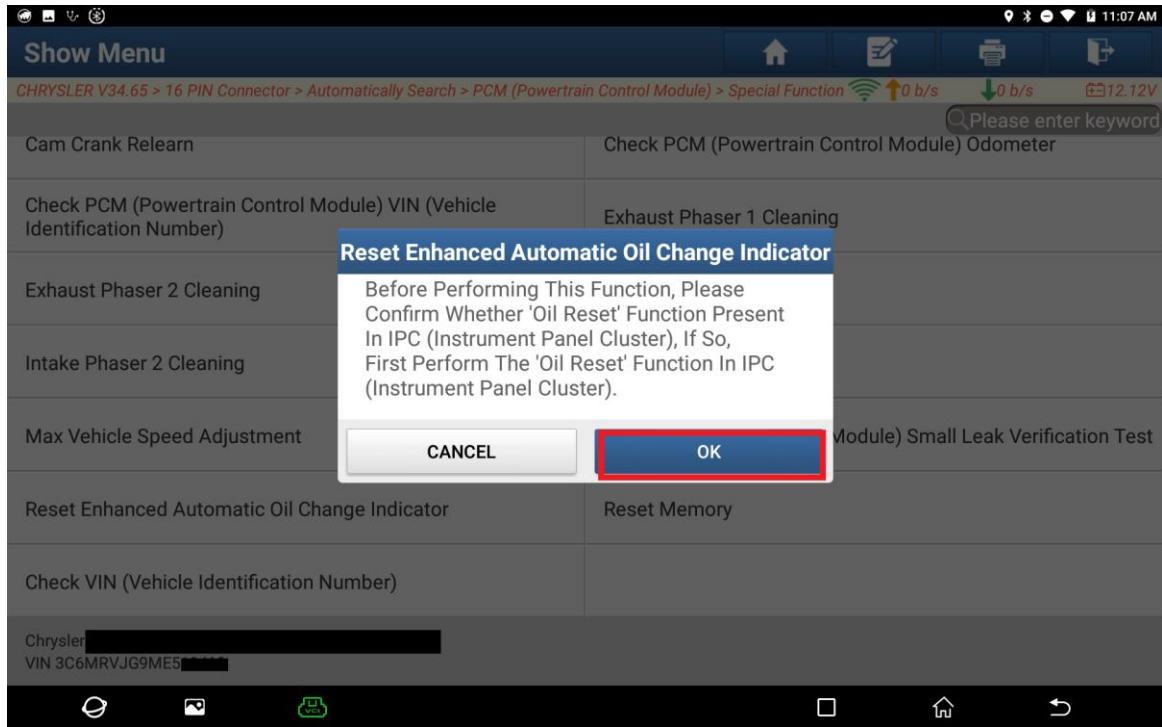


11. Click “OK”;

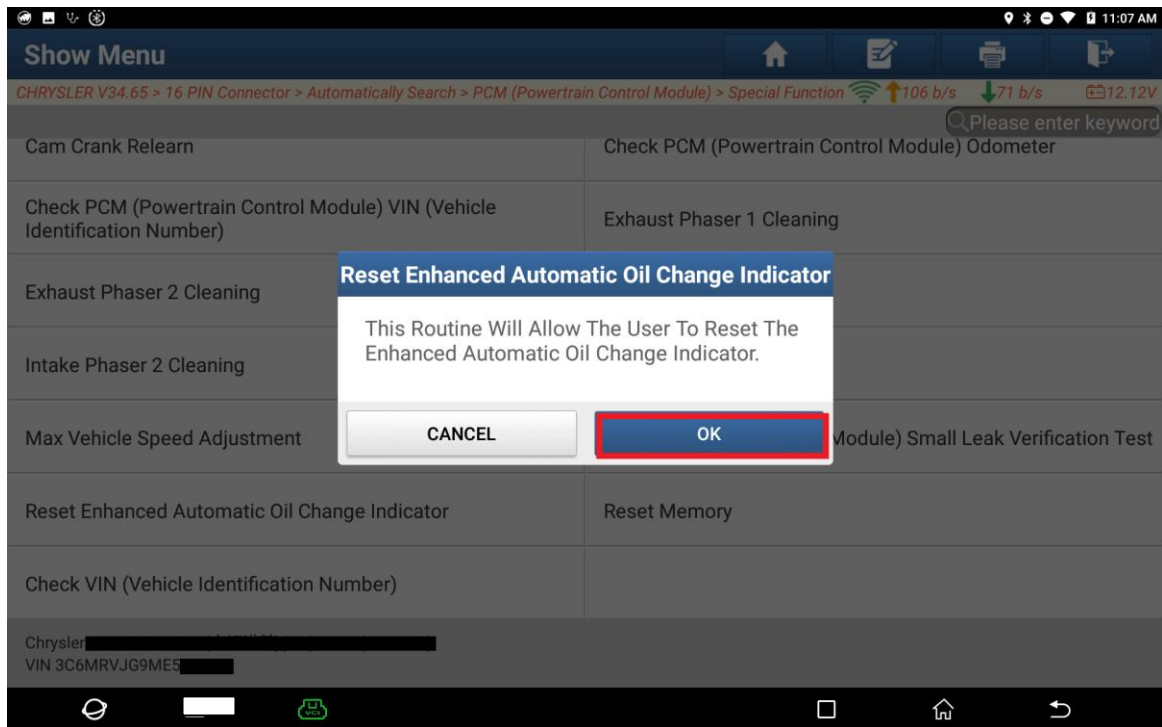

12. Click “OK”;

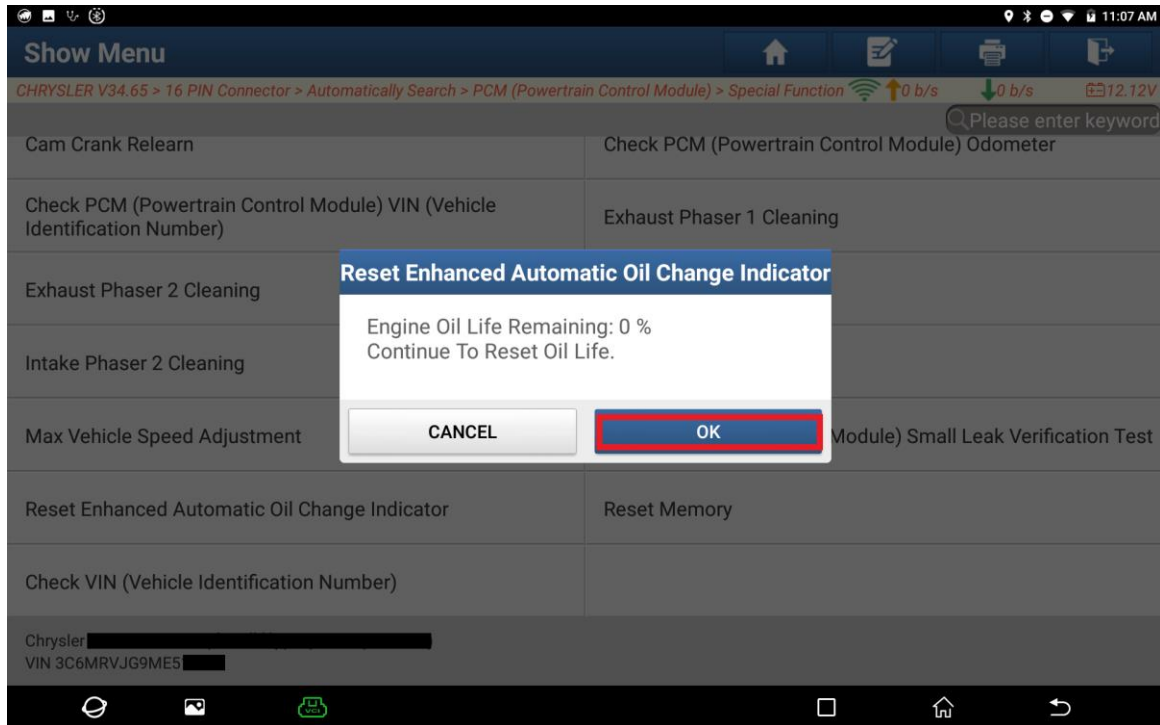

13. Click “OK” to complete the operation;

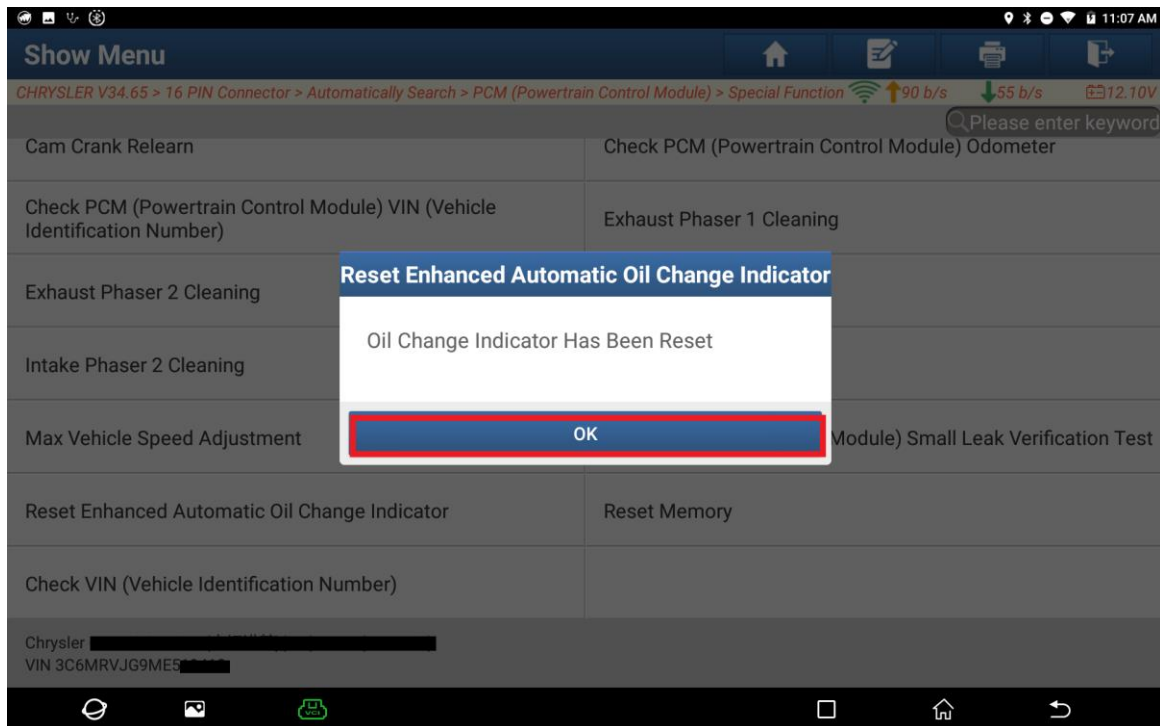

Statement:

The content of this document belongs to the copyright of Shenzhen Launch Co., Ltd., and no individual or unit may quote or reprint it without permission.