

Hyundai Kia Remote Control Matching


Function Description: This function needs to be executed when the remote control becomes invalid, is lost, or a new remote control needs to be added.

Attention:


1. To ensure the successful execution of the function, insert the ignition key and light up the instrument panel before execution.
2. Strictly follow the operation prompts to execute the function, and after completing the remote control matching, let the x431 diagnostic tool exit the system to disconnect the communication with the ECU, otherwise the x431 diagnostic tool will not be able to verify the unlocking and locking functions of the remote control while maintaining communication with the ECU.

Procedure:

1. Choose [CODE (Transmitter Code Saving)] on the x431 diagnostic tool, which may be directly called "CODE". These are all one system used for remote control matching.

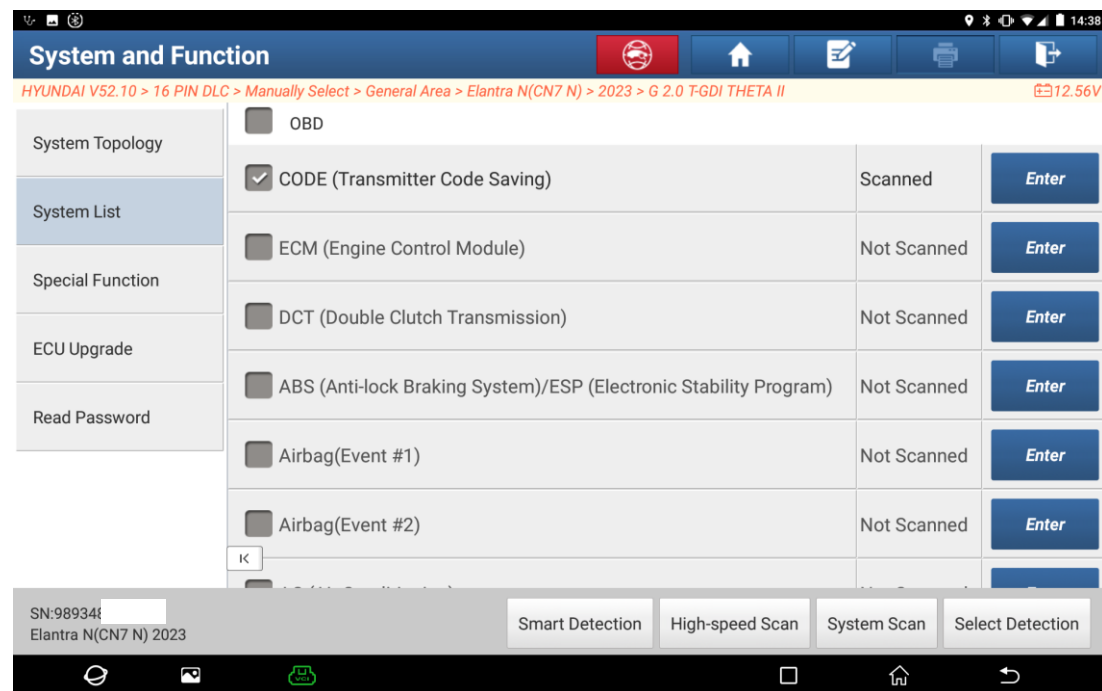

- Choose [Remote Control Matching] in the special function. A prompt message will pop up. Follow the prompt to start remote control matching. See the following figure.

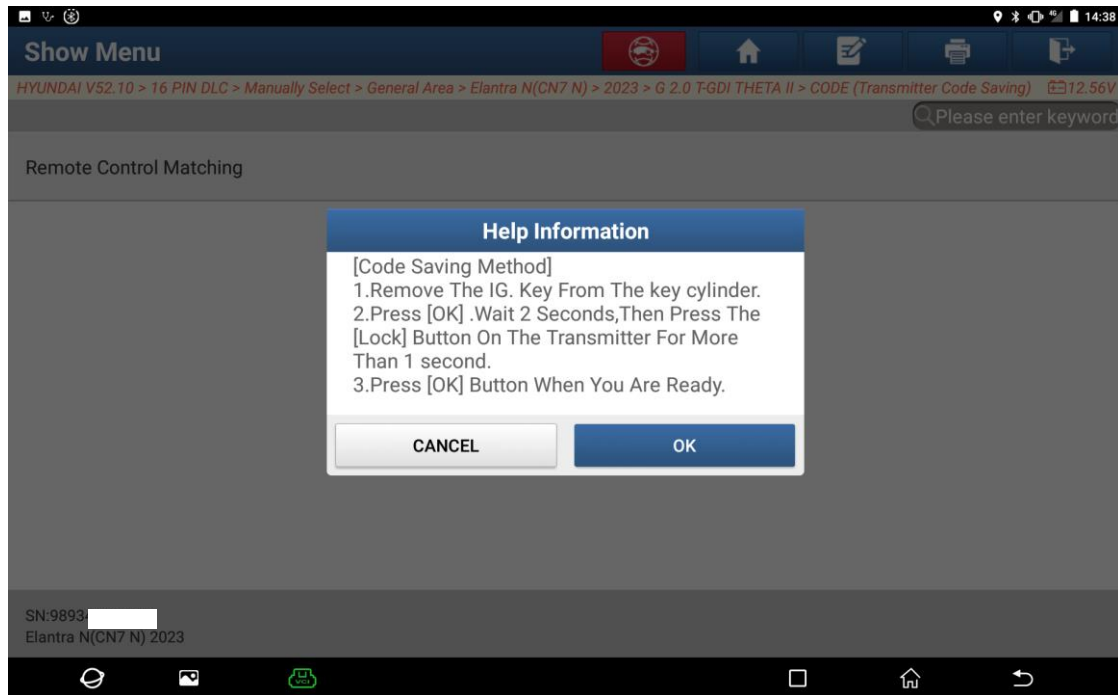


- Pull out the ignition key first according to the prompt, and then press OK. Next, the diagnostic tool will display the interface shown in the figure below. At this time, press and hold the OK button on the first remote control for 1s to view the registered remote control number.


Name	Value	Unit
Press [OK] Button On The Transmitter For 1 sec. No. Of Registered Transmitter:	2	EA




- When the value of the registered remote control number on the software interface changes to 1, and the following interface pops up, it means that the first remote control is matched successfully. Click OK to match the next one, or [Cancel] to exit the system. At the same time, check whether the remote control can communicate with the vehicle normally according to the help information.

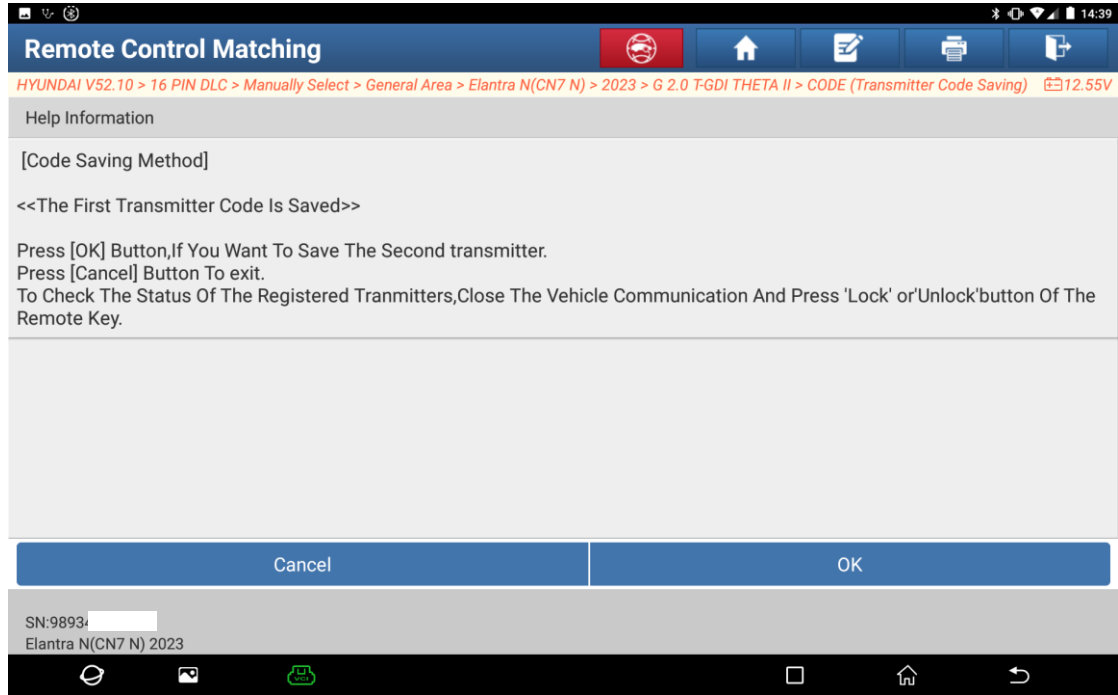

- Click OK to match the second remote control, return to the previous step interface, press and hold the OK button on the second remote control for 1s, and observe the changes in the registered remote control number.

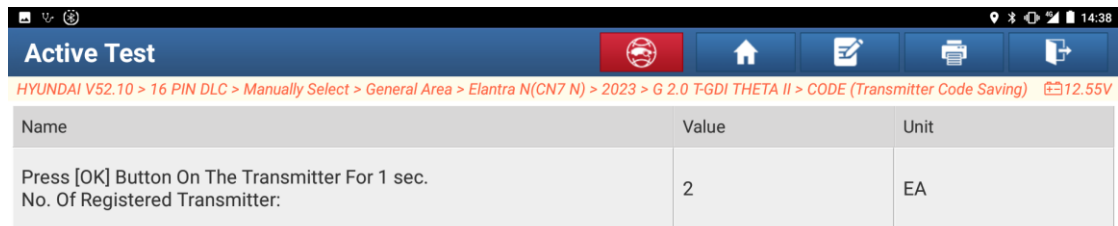

6. When the value of the registered remote control number on the software interface changes to 2, and the following interface pops up, it means that the second remote control is matched successfully. Click OK to match the next one, or [Cancel] to exit the system. Repeat the above operations to match multiple remote controls. Note that when confirming whether the remote control is working, do not use the key to insert the keyhole.

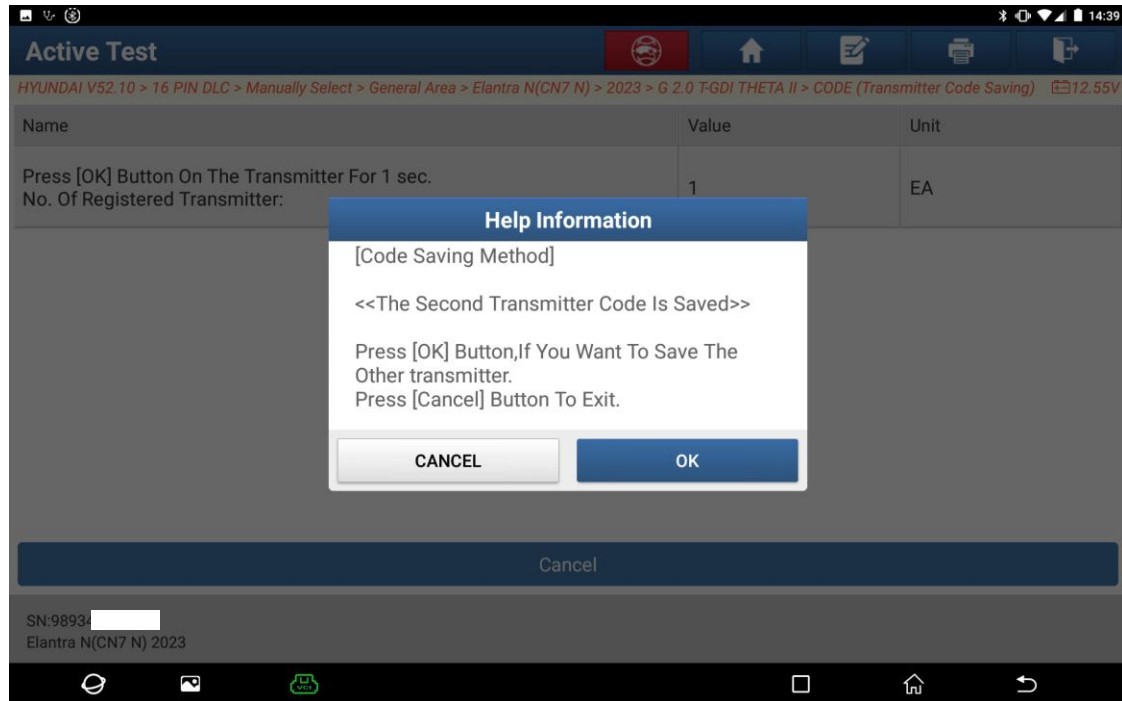

Statement:

The content of this document is copyrighted by Shenzhen Launch Tech Co., Ltd., and no individual or organization may quote or reprint it without consent.