

Ford Explorer Headlamp Control Module Calibration


Supported equipment: Launch's full range of comprehensive diagnostic equipment

Current equipment: PAD 5



Function description: This program is used to adjust the adaptive LED headlamps and calibrate their level sensors.

Tested model: Ford/2024/ Explorer, VIN: 1FM5K8ABXRG*****



1. On a PAD 5, choose [Local Diagnose].

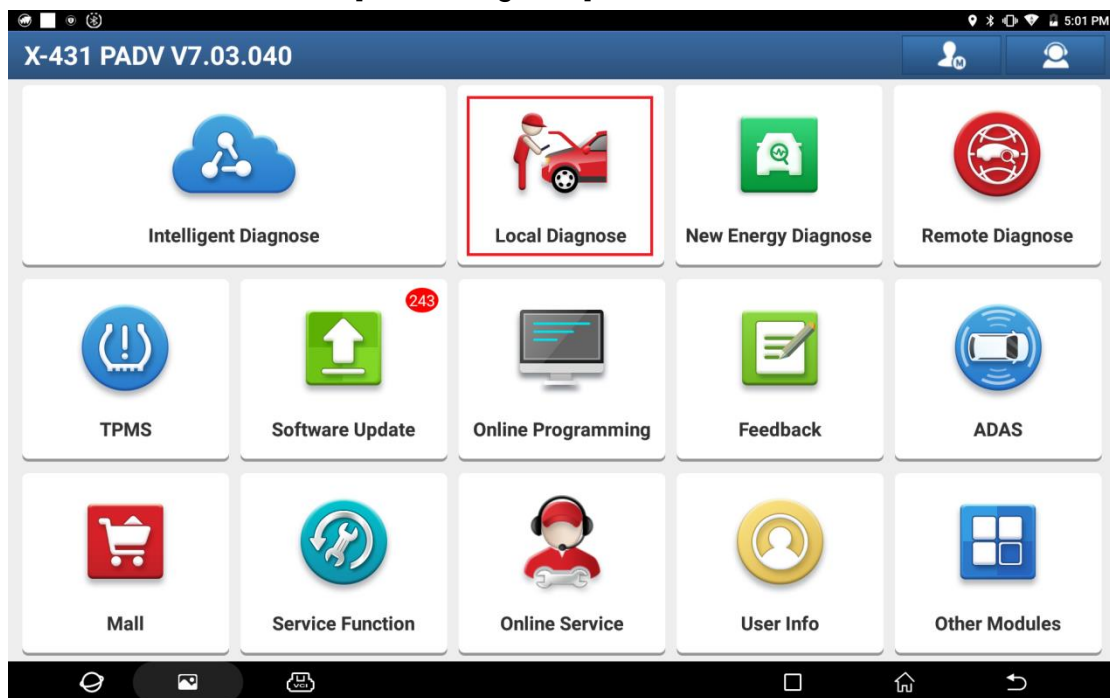


2. Choose [Ford] to test.

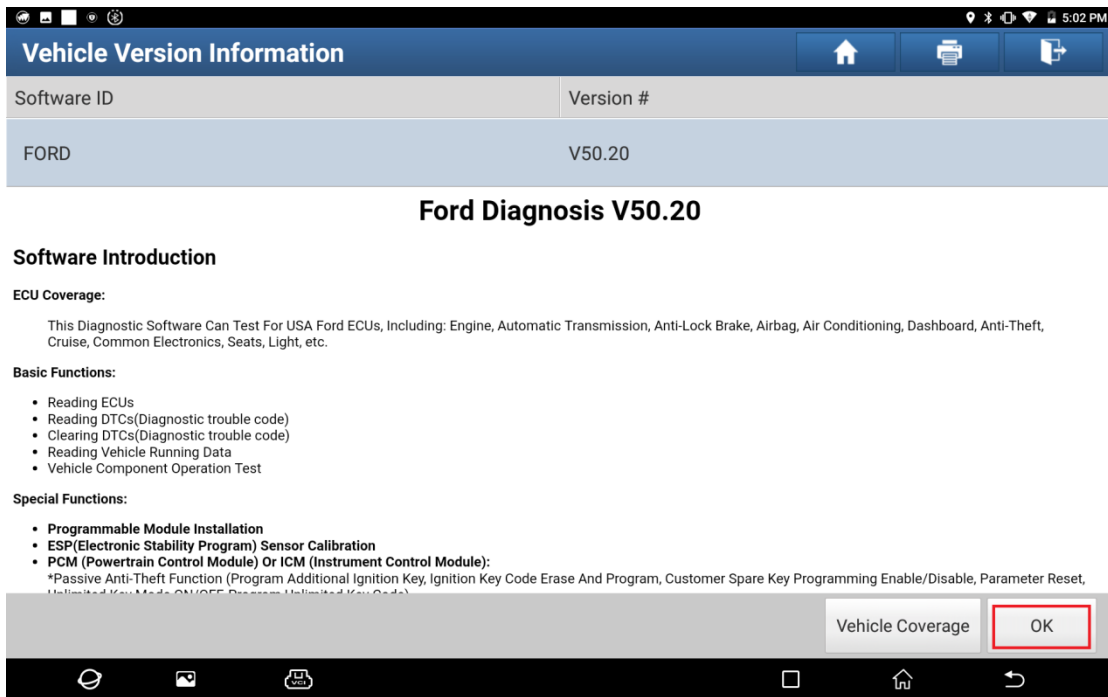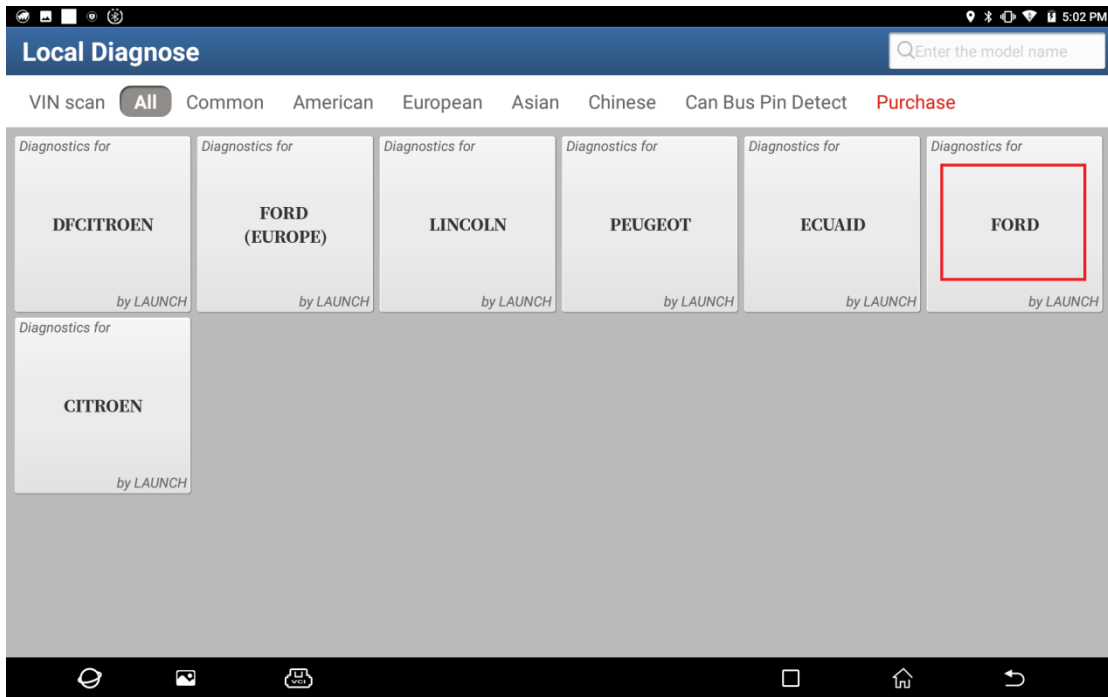


3. Choose [Automatically Search] to identify car models automatically.

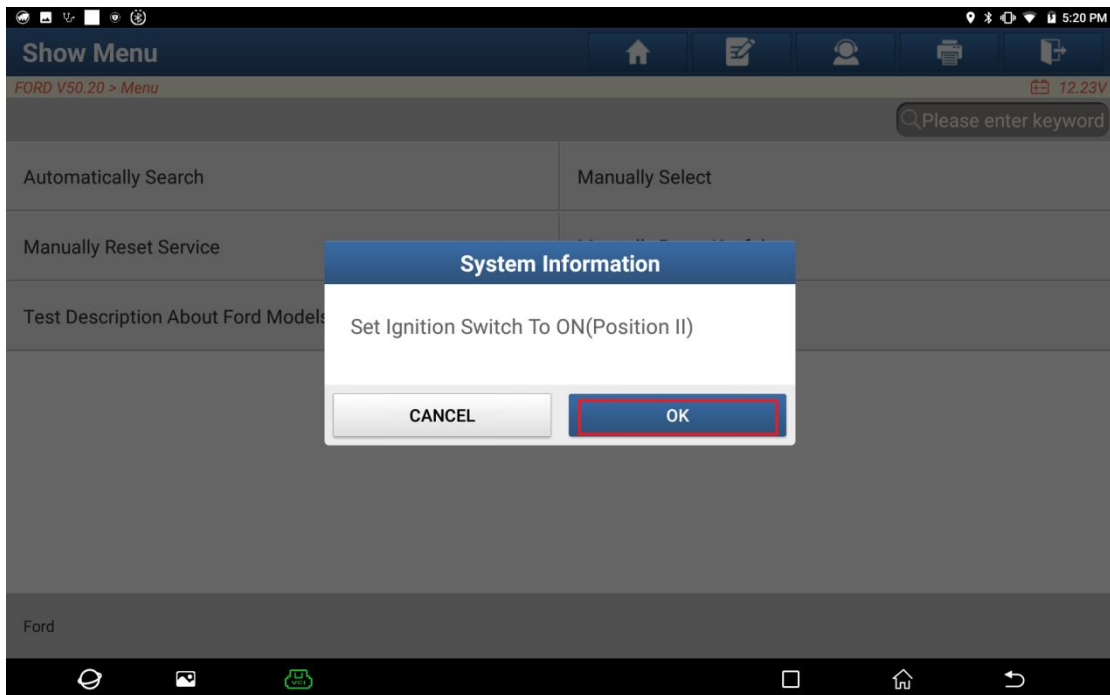
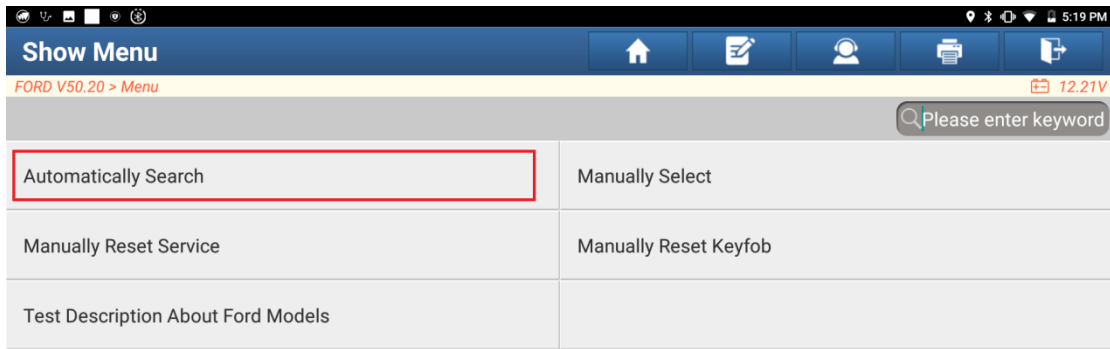


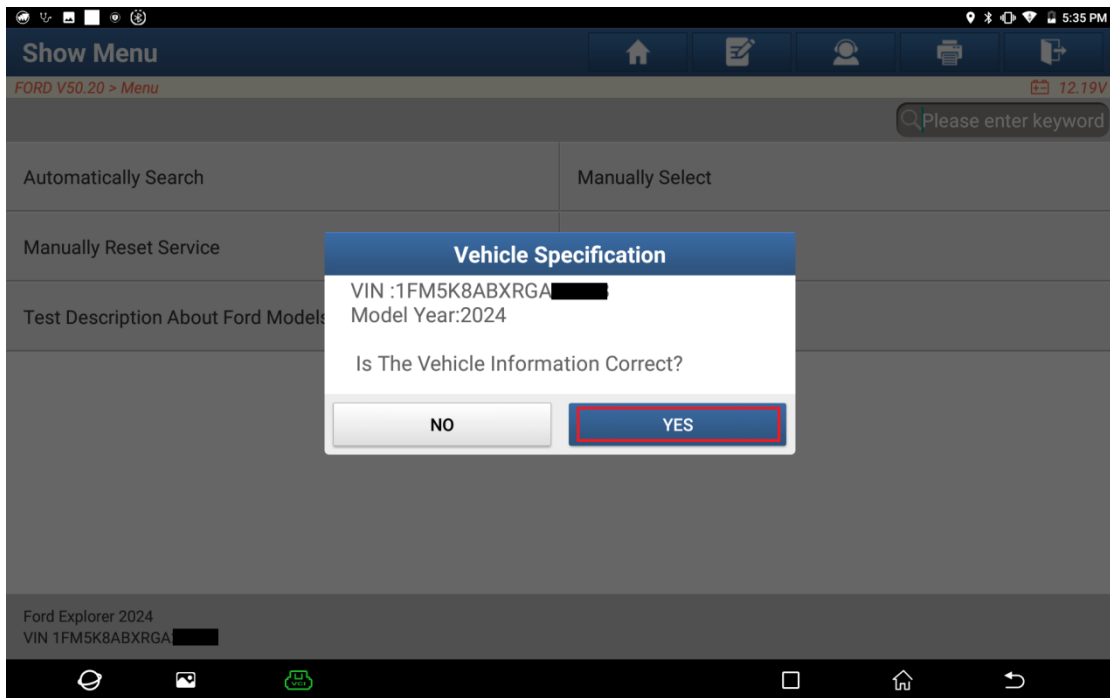


4. Click [Smart Detection] to scan the entire vehicle systems.

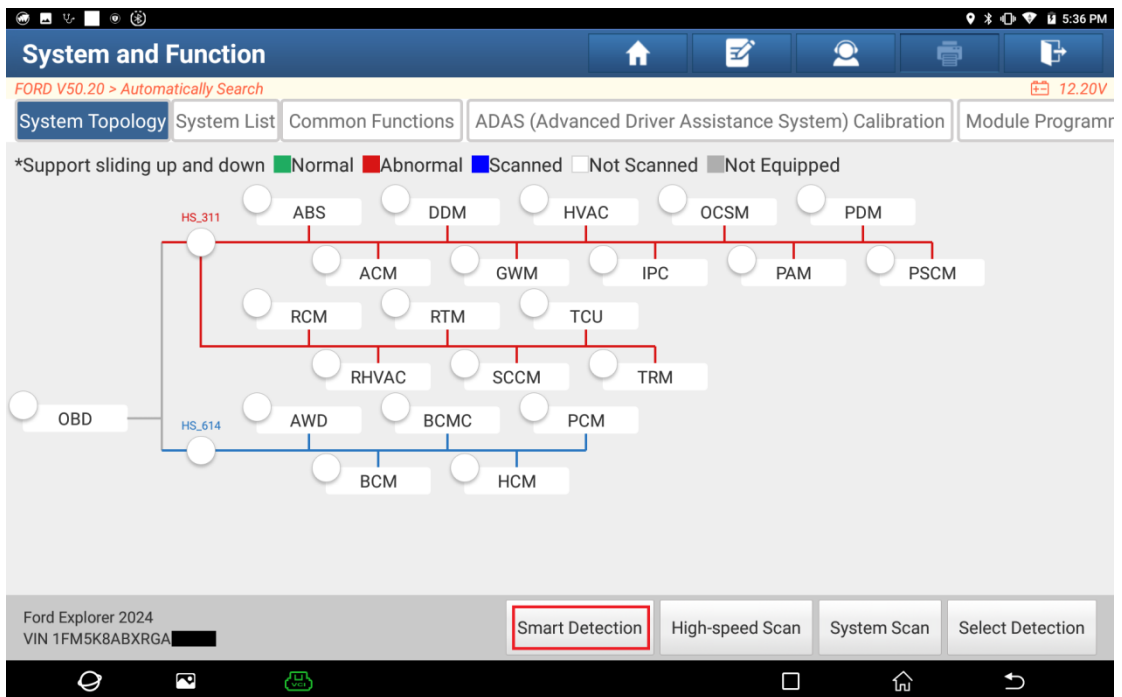


5. Click [HCM (Headlamp Control Module)] to access the system.

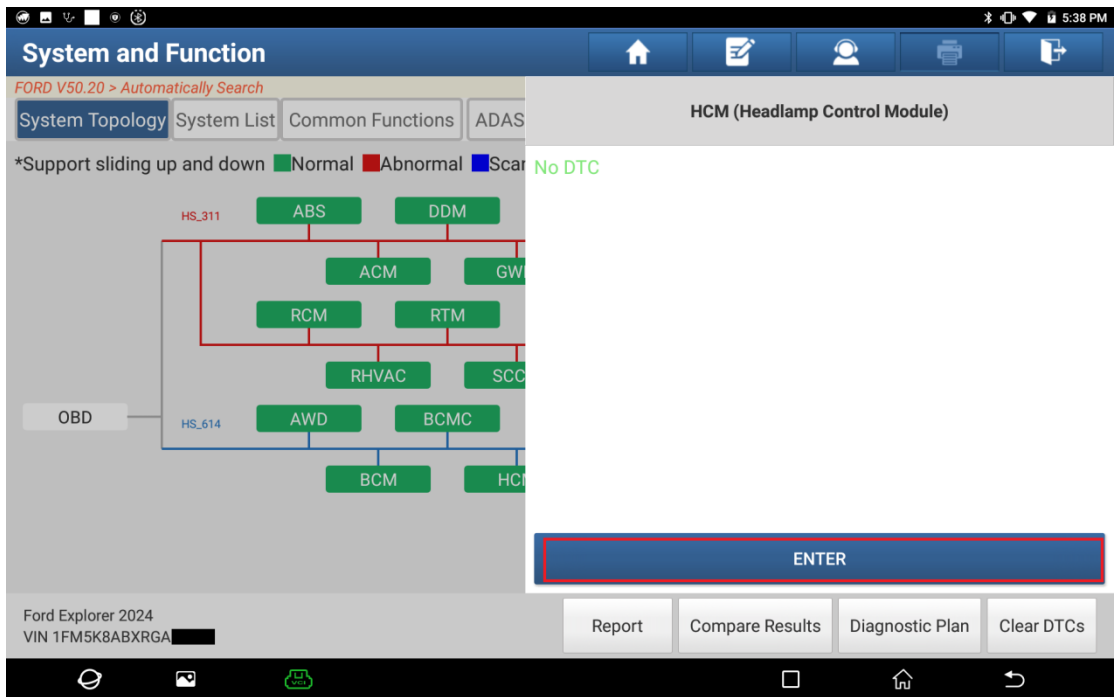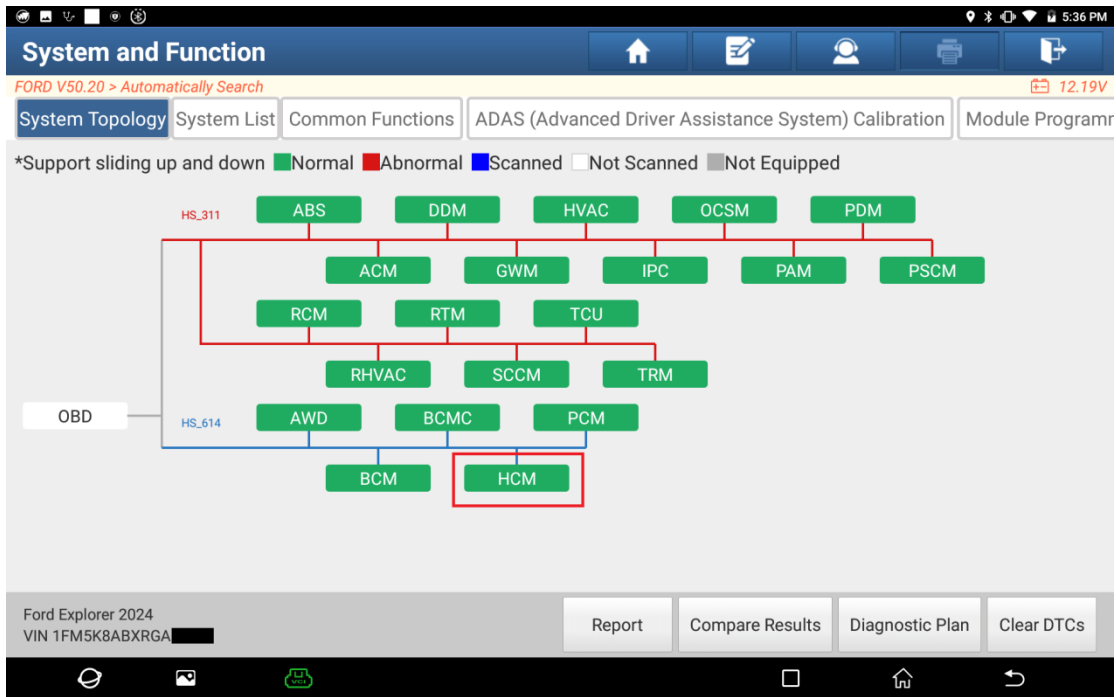



6. Click [Special Functions].

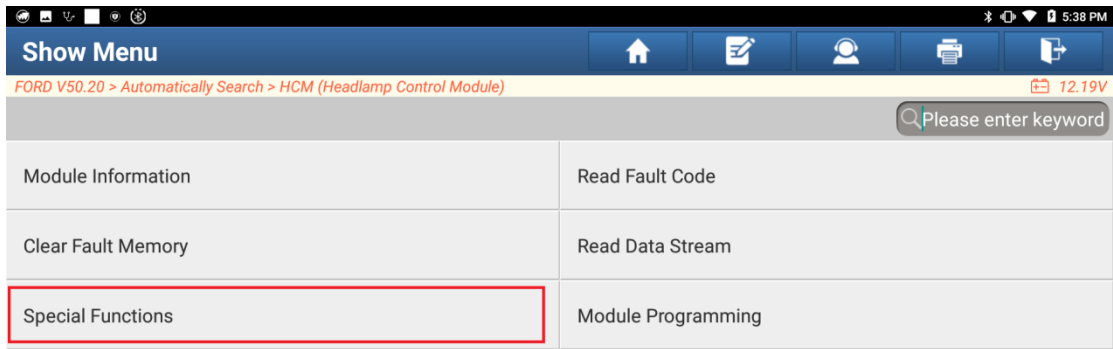

7. Click [HCM (Headlamp Control Module) Calibration].

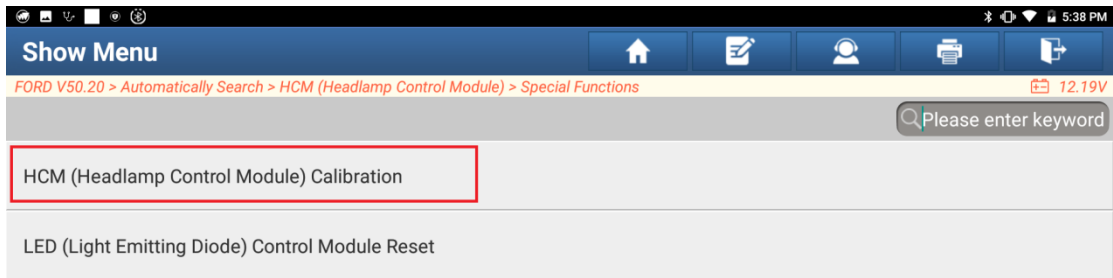

8. Click OK. The headlamp control module calibration program is completed.

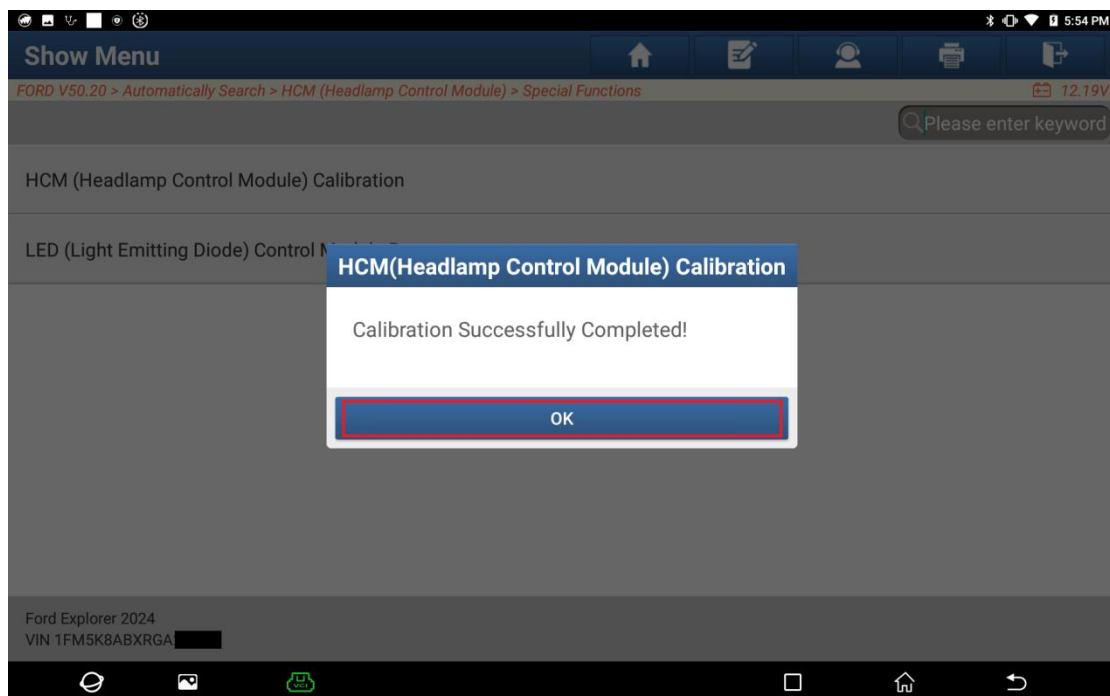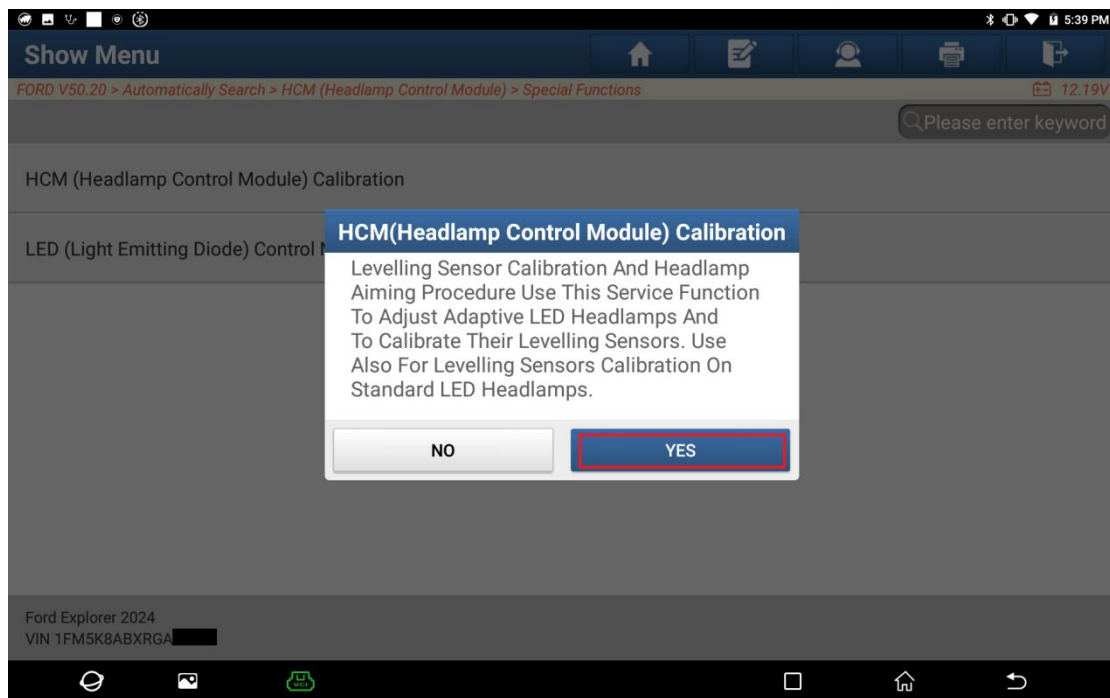

Statement:

The content of this document is copyrighted by LAUNCH TECH CO., LTD., and no individual or organization may quote or reprint it without consent.