

Ford EcoSport Brake Master Cylinder Pressure Transducer Calibration


Supported equipment: Launch's full range of comprehensive diagnostic equipment

Current equipment: PAD 5


Function description: When installing the ABS (Anti-lock Braking System) module or brake master cylinder pressure transducer, it is necessary to perform this function.

Tested model: Ford/2022/EcoSport, VIN: WF01XXERK1NB*****



1. On a PAD 5, choose [Local Diagnose].

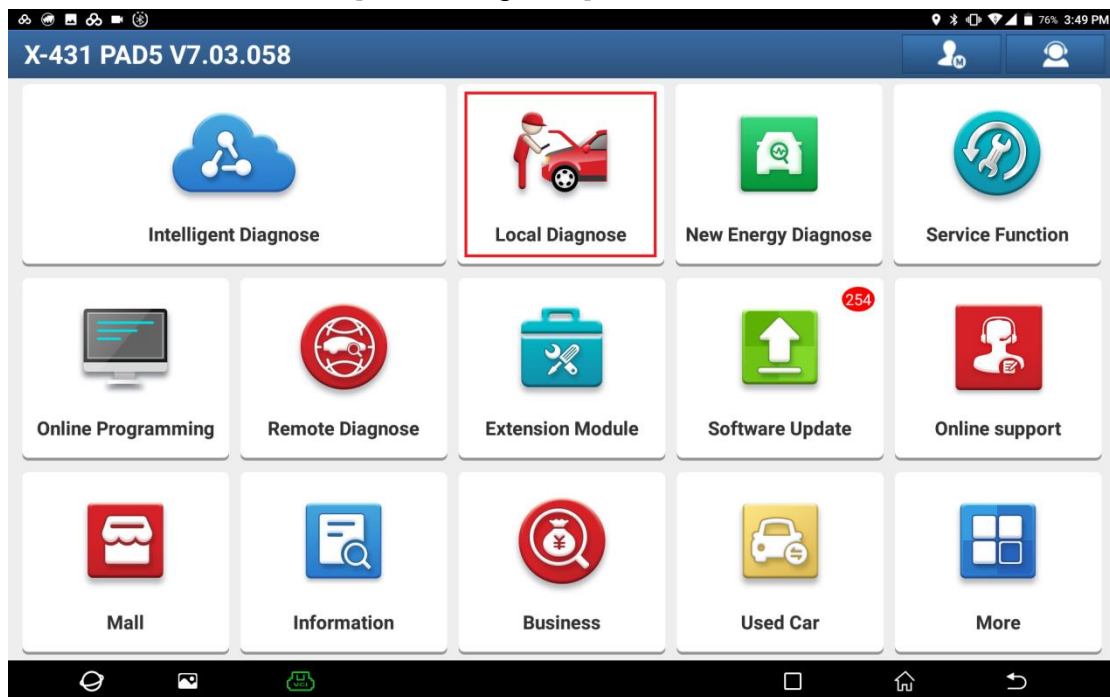


2. Choose [FORD] to test.

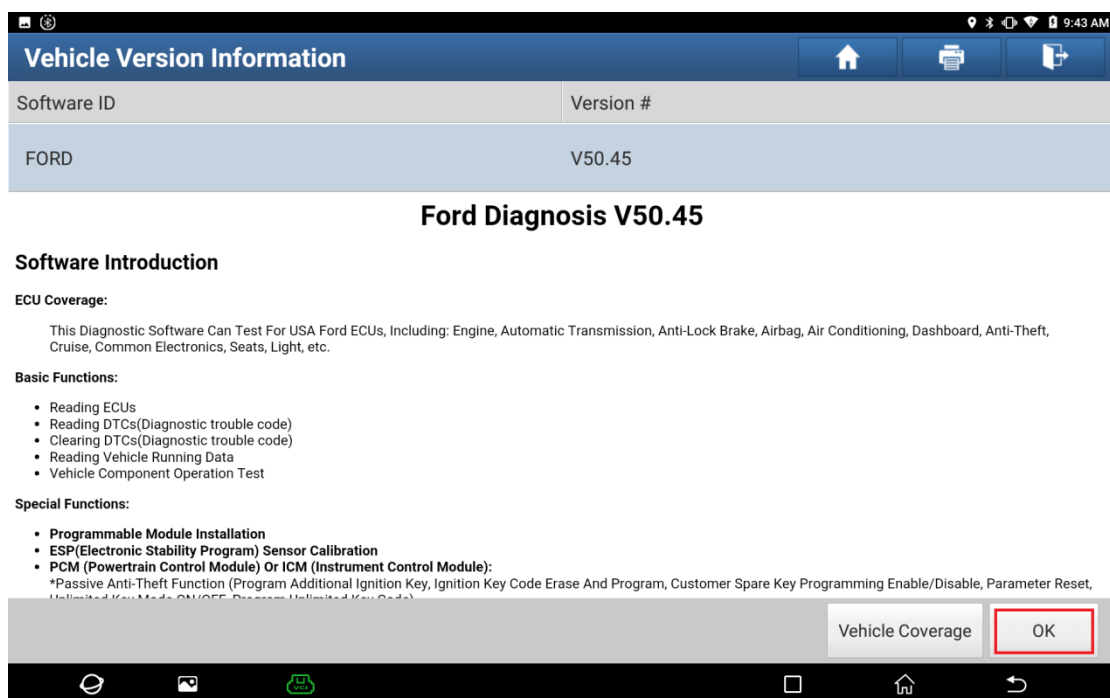


3. Choose [Automatically Search] to identify car models automatically.

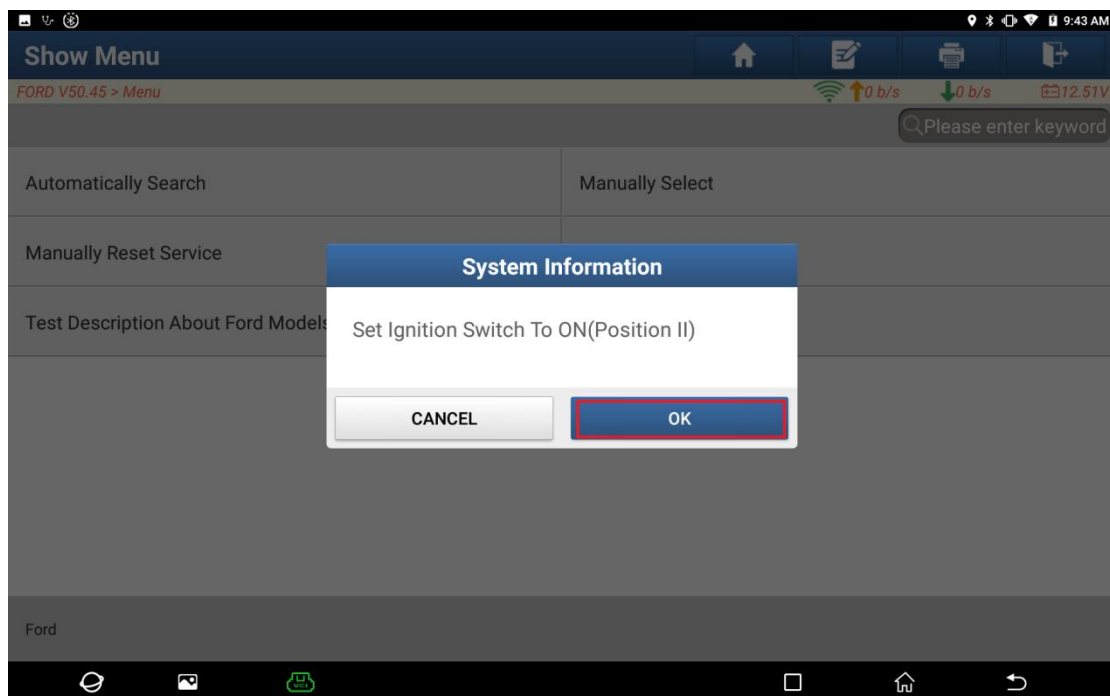
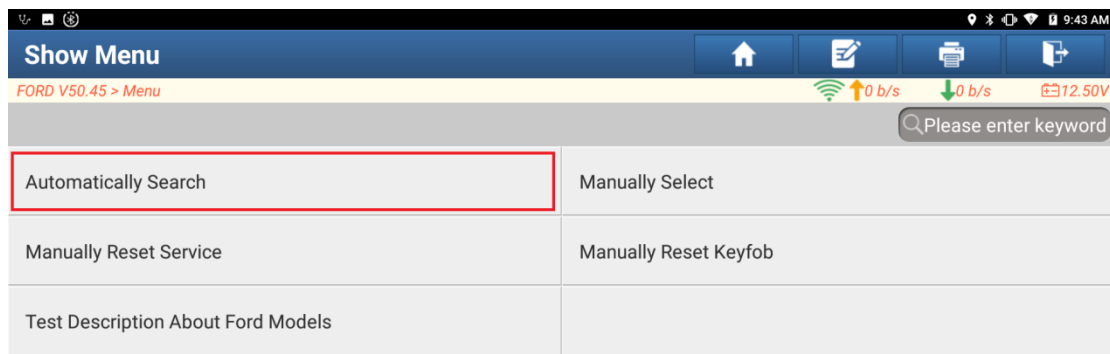


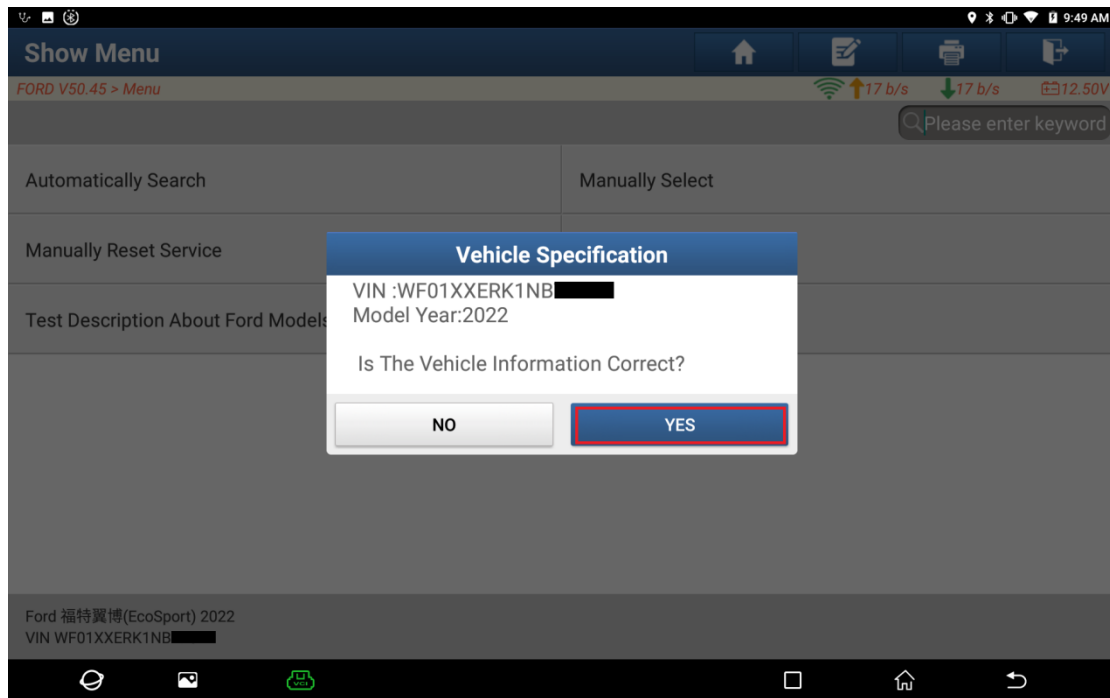


4. Click [High-speed Scan] to scan the entire vehicle systems.

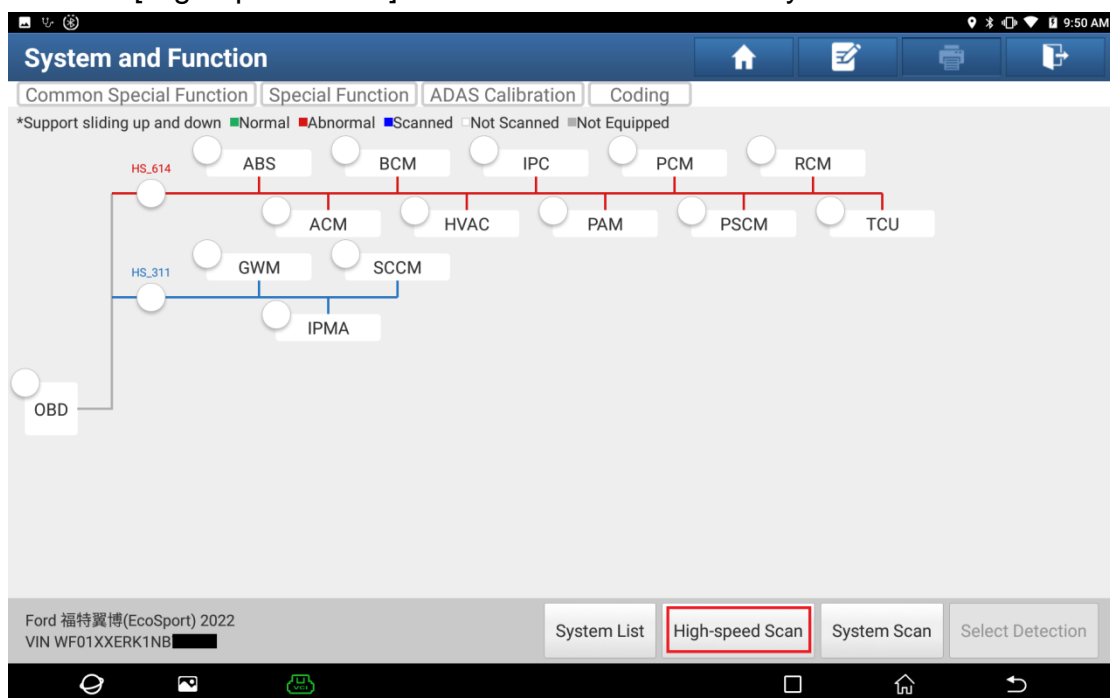


5. Click [ABS (Anti-Lock Brake System)] to access the system.

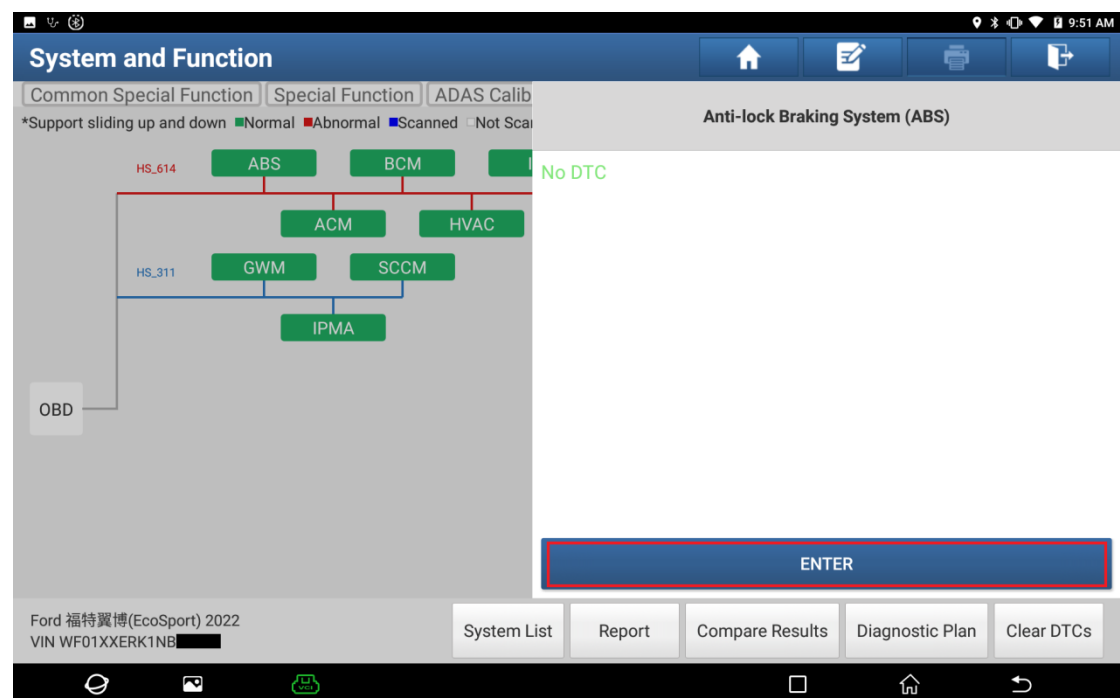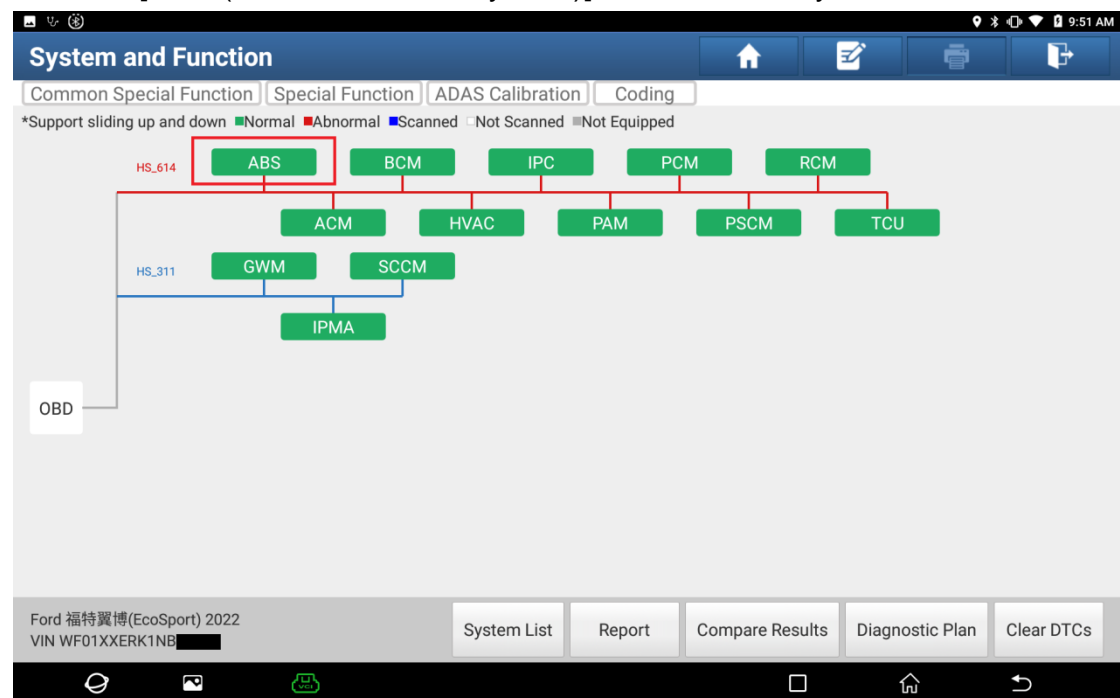


6. Click [Special Functions].

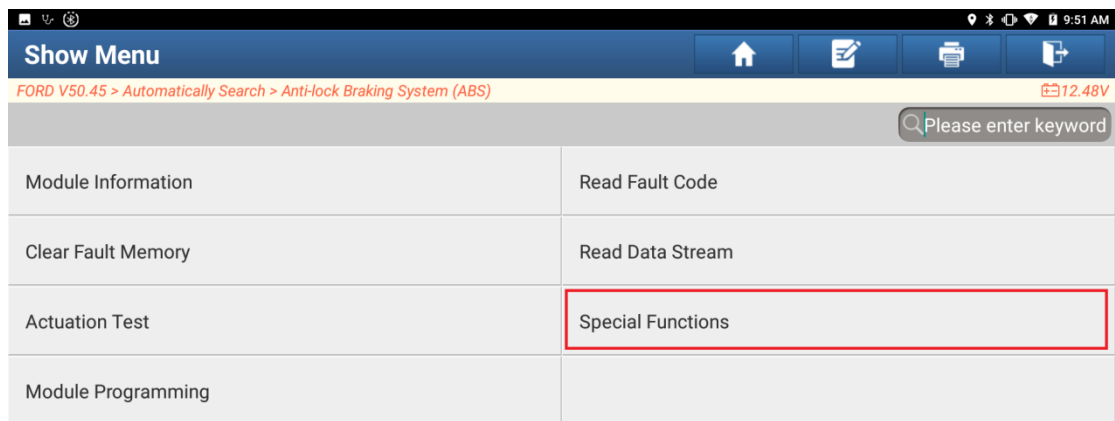


7. Click [Brake Master Cylinder Pressure Transducer Calibration].

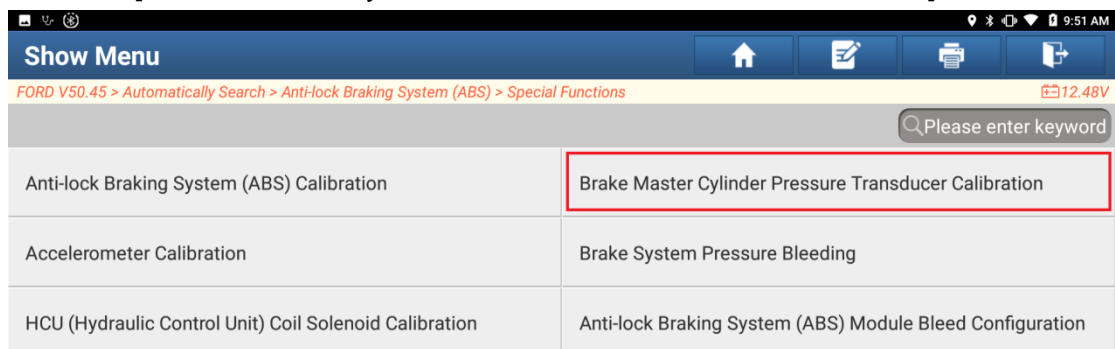


8. Program function introduction

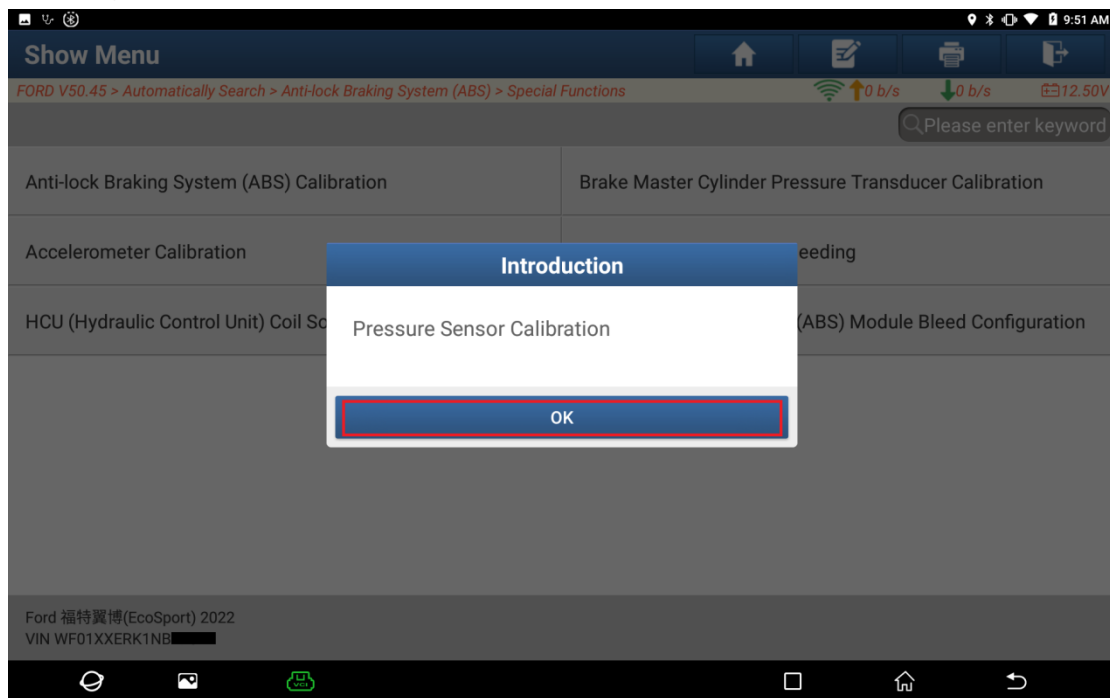


9. Program execution conditions and precautions

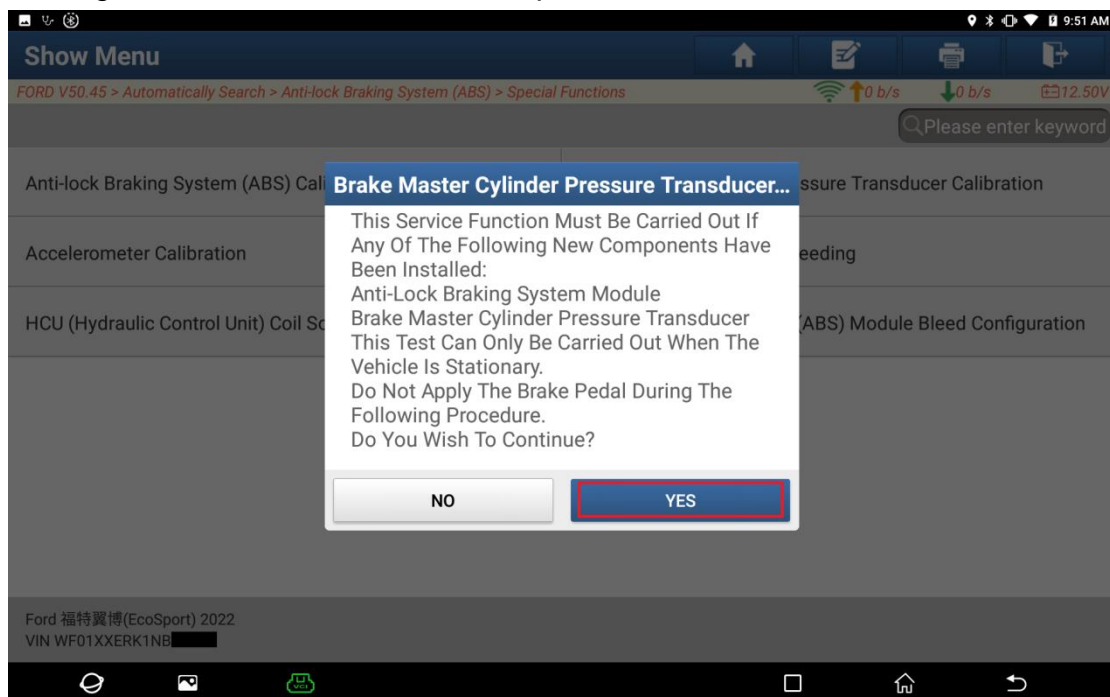


10. Ignition status: Ignition on, engine off

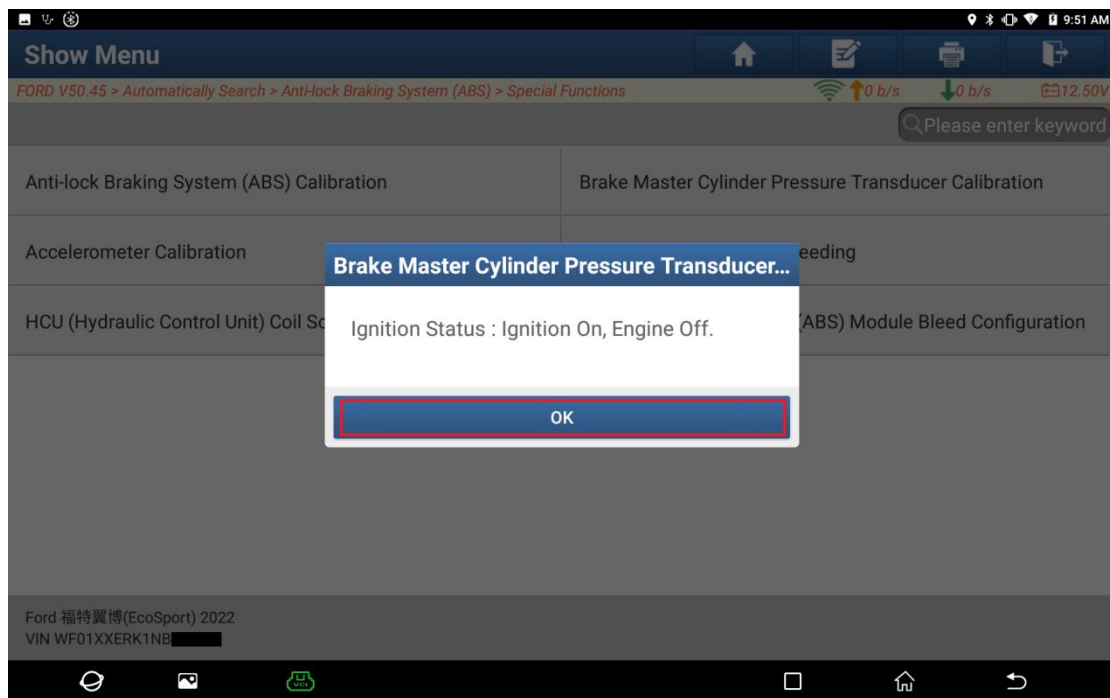


11. Calibrate the pressure sensor.

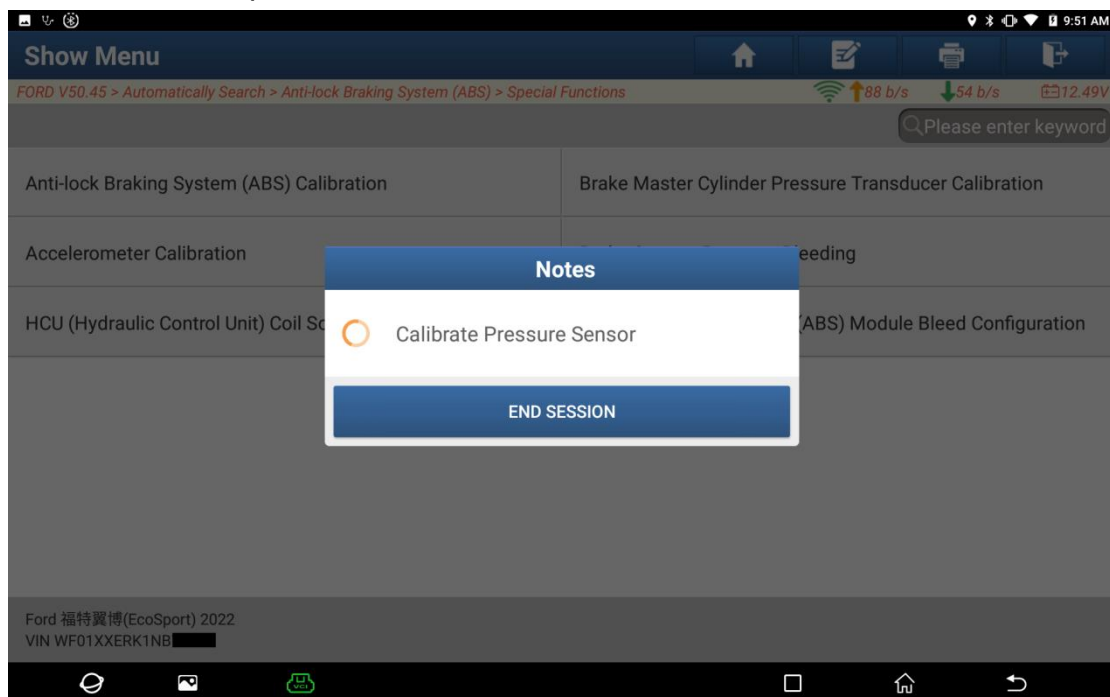

12. Ignition status: Ignition off

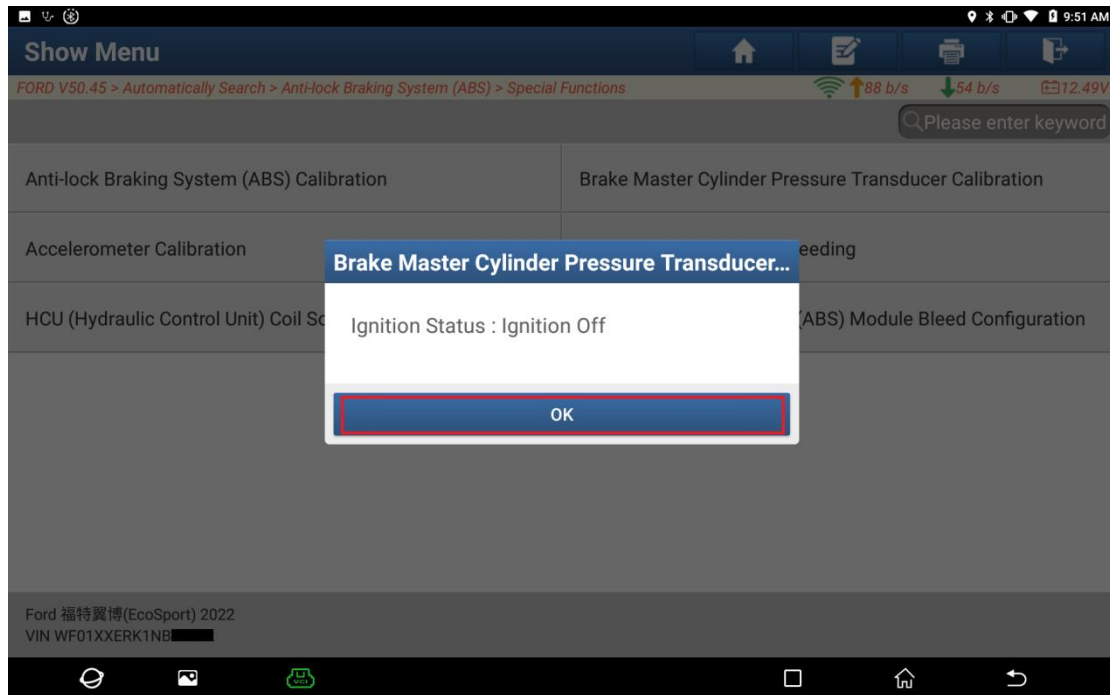

13. Program successful. Exit the program.

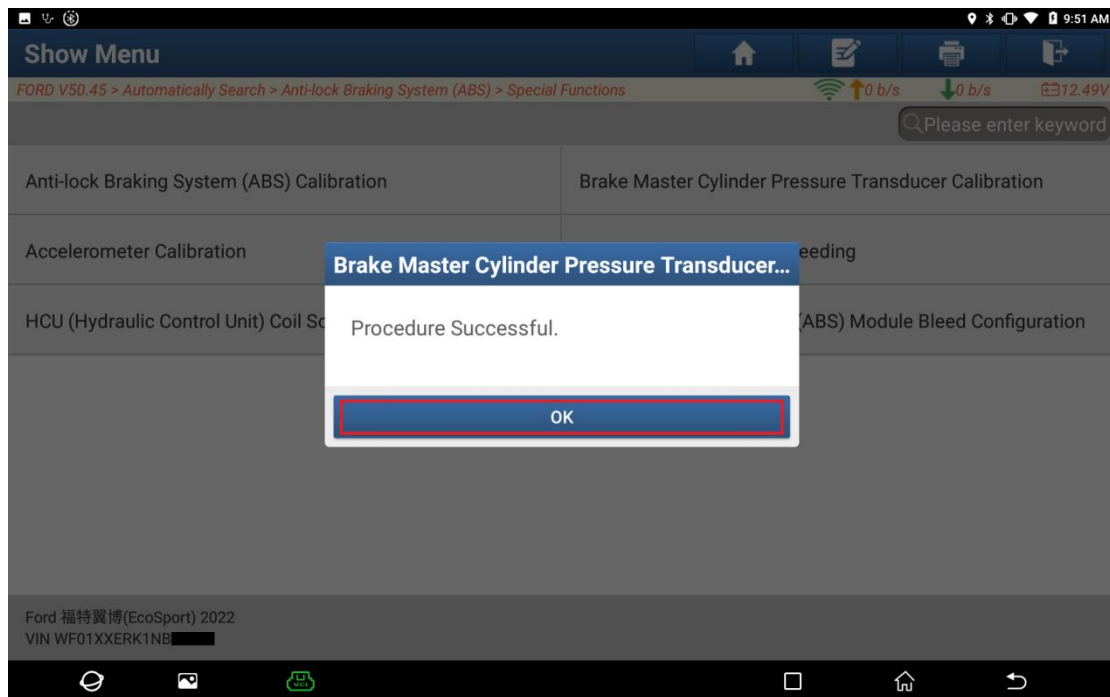**Statement:**

The content of this document is copyrighted by LAUNCH TECH CO., LTD., and no individual or organization may quote or reprint it without consent.